



P R O F E S S I O N A L



NGSM48T2

**48-Port 10/100/1000Base-T + 2 × 10 Gigabit SFP+ Ports
Layer 2+ Full Management Switch**

User Manual

Version 1.0

FCC/CE Mark Warning

FCC Warning

This Equipment has been tested and found to comply with the limits for a Class-A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. It may cause harmful interference to radio communications if the equipment is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following means:

- Adjust or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Mark Warning

This is a Class-B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Table of Contents

Table of Contents

Before Starting	8
Intended Readers	9
Icons for Note, Caution, and Warning	9
Product Package Contents	10
Chapter 1: Product Overview	11
Product Brief Description	12
Product Specification	14
Hardware Description	17
Hardware Installation	18
Chapter 2: Preparing for Management	19
Preparation for Serial Console	20
Preparation for Web Interface	22
Preparation for Telnet/SSH Interface	24
Chapter 3: Featuring Configuration – Web UI	26
System Configuration	27
System Information	27
IP Configuration	28
IPv6 Configuration	30
NTP Configuration	32
Time Configuration	33
System Log Configuration	35
Power Reduction	37
Port Configuration	39
Security Configuration:	41
Security / Switch	41
Security / Switch / Users Configuration	41
Security / Switch / Privilege Levels Configuration	43
Security / Switch / Auth Method	45
Security /Switch / SSH Configuration	46
Security / Switch / HTTPS Configuration	47
Security / Switch / Access Management Configuration	48
Security / Switch / SNMP	50
RMON Statistics Configuration	61
Security /Network	67
Port Security Limit Control Configuration	67

Table of Contents

Security / Network / Network Access Server Configuration	71
Security / Network / Access Control List Configuration	82
Switch / Network / DHCP Configuration	98
IP Source Guard Configuration	101
ARP Inspection	103
Security / AAA Authentication Server Configuration	105
Aggregation Configuration	109
Static Aggregation	109
LACP - Dynamic Aggregation	111
Loop Protection	113
Spanning Tree	115
Spanning Tree / Bridge Setting	116
Spanning Tree / MSTI Mapping	118
Spanning Tree / MSTI Priorities	119
Spanning Tree / CIST Ports	120
Spanning Tree MSTI Ports	123
MVR (Multicast VLAN Registration)	124
IPMC (IP Multicast)	126
IGMP Snooping Configuration	126
Basic Configuration	126
IGMP Snooping VLAN Configuration	129
IGMP Snooping / Port Group Filtering	131
MLD Snooping Configuration	132
Basic Configuration	132
MLD Snooping VLAN Configuration	134
IPMC / MLD Snooping / Port Group Filtering	136
LLDP Parameters	137
LLDP Configuration	137
LLDP Media Configuration	140
MAC Address Table Configuration	148
VLAN (Virtual LAN)	151
VLAN Membership Configuration	151
VLAN Port Configuration	154
Private VLANs	156
Private VLAN Membership Configuration	156
Port Isolation Configuration	158
VCL	159

Table of Contents

VCL / MAC-Based VLAN Configuration	159
VCL / Protocol-based VLAN	161
VCL / IP Subnet-based VLAN	164
Voice VLAN Configuration	166
Voice VLAN / Configuration	166
Voice VLAN / OUI Configuration	168
QoS	169
QoS / Ingress Port Classification	169
QoS / Ingress Port Policer Config	171
QoS / Port Scheduler	172
QoS / Egress Port Shapers	173
QoS / Port Tag Remarking	174
QoS / Port DSCP Configuration	175
QoS / DSCP based QoS Ingress Classification	177
QoS / DSCP Translation	178
QoS / DSCP Classification	180
QoS / Control List Configuration	181
QoS / Storm Control Configuration	184
Mirroring Configuration	185
UPnP Configuration	187
sFlow Configuration	188
Chapter 4: Feature Configuration - CLI	190
System Configuration	192
Power Reduction	199
Port Configuration	201
Security Configuration	204
Aggregation Configuration	224
Loop Protection	226
Spanning Tree	227
MVR	231
IPMC	233
LLDP Configuration	236
MAC Address Table Configuration	238
VLAN Configuration	240
Private VLAN Configuration	241
VCL Configuration	242
Voice VLAN Configuration	244

Table of Contents

QoS Configuration	246
Mirroring Configuration	250
UPnP Configuration	251
sFlow Configuration.....	252
Diagnostic Commands	254
Maintenance Commands	256
Chapter 5: Web Configuration - Monitor, Diagnostic, Maintenance.....	258
Monitor.....	259
Monitor / System	259
Monitor / System / Information	259
CPU Load	261
System Log Information.....	262
System / Detailed Log.....	263
Monitor / Port State	264
Port State.....	264
Traffic Overview.....	265
QoS Statistics	266
QCL Status	267
Detailed Port Statistics.....	269
Monitor / Security	271
Security / Access Management Statistics.....	271
Security / Network	272
Security / AAA.....	292
Switch / SNMP / RMON	300
LACP System Status	306
System Status.....	306
LACP Port Status.....	307
LACP statistics	308
Loop Protection.....	309
STP Bridge Status	310
Bridge Status	310
STP Port Status.....	311
STP Port Statistics.....	312
MVR Status	313
Statistics.....	313
MVR Group Table.....	314
Monitor / IPMC / IGMP Snooping.....	315

Table of Contents

IGMP Snooping.....	315
MLD Snooping Status.....	321
Monitor / LLDP.....	325
LLDP / Neighbor.....	325
LLDP MED Neighbors.....	327
LLDP EEE.....	331
LLDP Statistics.....	333
Dynamic MAC Table.....	335
VLAN Membership Status.....	337
VCL MAC-Based VLAN Status.....	341
sFlow.....	342
Diagnostic.....	343
Ping.....	343
Ping6.....	344
VeriPHY Cable Diagnostic.....	345
Maintenance.....	347
Restart Device.....	347
Factory Defaults.....	347
Software Upload.....	348
Firmware Update.....	348
Image Select.....	349
Configuration.....	350
Appendix A: Product Safety.....	352
Appendix B: IP Configuration for Your PC.....	353

Before Starting

In Before Starting:

This section contains introductory information, which includes:

- **Intended Readers**
- **Icons for Note, Caution, and Warning**
- **Product Package Contents**

Before Starting

Intended Readers

This manual provides information regarding to all the aspects and functions needed to install, configure, use, and maintain the product you've purchased.

This manual is intended for technicians who are familiar with in-depth concepts of networking management and terminologies.

Icons for Note, Caution, and Warning

To install, configure, use, and maintain this product properly, please pay attention when you see these icons in this manual:



A **Note** icon indicates important information which will guide you to use this product properly.



A **Caution** icon indicates either a potential for hardware damage or data loss, including information that will guide you to avoid these situations.



A **Warning** icon indicates potentials for property damage and personal injury.

Before Starting

Product Package Contents

Before starting install this product, please check and verify the contents of the product package, which should include the following items:



One Network Switch



One Power Cord



One User Manual CD



One pair Rack-mount kit + 8 Screws

Note: If any item listed in this table above is missing or damaged, please contact your distributor or retailer as soon as possible.

Chapter 1:

Product Overview

In Product Overview:

This section will give you an overview of this product, including its feature functions and hardware/software specifications.

- **Product Brief Description**
- **Product Specification**
- **Hardware Description**
- **Hardware Installation**

Product Brief Description

Introduction

The switch is 48-port 10/100/1000Base-T + 2 × 10 Gigabit SFP+ Ports Rack-mount L2+ Full Management Network Switch that is designed for medium or large network environment to strengthen its network connection. The switch supports 136G non-blocking switch fabric, the 48 gigabit ports and 2 10G uplink ports can transmit and receive data traffic without any lost. The EEE feature reduces the power consumption when there is no traffic forwarding even port is still connected. The switch also supports Layer 2+ full management software features. These features are powerful to provide network control, management, monitor and security feature requests. Including rack-mount brackets, the 19" size fits into your rack environment. It is a superb choice to boost your network with better performance and efficiency.

2 10 Gigabit SFP+ Open Slots

The switch equips with 2 10G SFP+ open slots as the uplink ports, the 10G uplink design provides an excellent solution for expanding your network from 1G to 10G. By 10G speed, this product provides high flexibility and high bandwidth connectivity to another 10G switch or the Servers, Workstations and other attached devices which support 10G interfaces. The user can also aggregate the 10G ports as Trunk group to enlarge the bandwidth.

Full Layer 2 Management Features

The switch includes full Layer 2+ Management features. The software set includes up to 4K 802.1Q VLAN and advanced Protocol VLAN, Private VLAN, MVR...features. There are 8 physical queues Quality of Service, IPv4/v6 Multicast filtering, Rapid Spanning Tree protocol to avoid network loop, Multiple Spanning Tree Protocol to integrate VLAN and Spanning Tree, LACP, LLDP; sFlow, port mirroring, cable diagnostic and advanced Network Security features. It also provides Console CLI for out of band management and SNMP, Web GUI for in band Management.

Advanced Security

The switch supports advanced security features. For switch management, there are secured HTTPS and SSH, the login password, configuration packets are secured.

The port binding allows to bind specific MAC address to the port, only the MAC has the privilege to access the network. The 802.1X port based Access Control, every user should be authorized first when they want to access the network. AAA is the short of the Authentication, Authorization and Accounting with RADIUS, TACAS+ server. Layer 2+ Access Control List allows user to define the access privilege based on IP, MAC, Port number, and etc.

Product Specification

<p>Standard</p>	<p>Ethernet: IEEE 802.3, 802.3u, 802.3ab, 802.3ae IEEE 802.3az Energy Efficient Ethernet (EEE) Protocol: IEEE 802.3x - Flow Control, IEEE 802.1Q – VLAN, IEEE 802.1p - Class of Service, IEEE 802.1D - Spanning Tree, IEEE 802.1w - Rapid Spanning Tree, IEEE 802.1s - Multiple Spanning Tree, IEEE 802.3ad - Link Aggregation Control Protocol (LACP), IEEE802.1v - Protocol VLAN, IEEE 802.1AB - LLDP (Link Layer Discovery Protocol), IEEE 802.1X - Access Control</p>
<p>Interface</p>	<p>Number of Port: 50 10/100/1000Base RJ-45 Port : 48, Auto-negotiation, Auto MDI/MDIX 10G SFP+ : 2</p>
<p>Performance</p>	<p>Switching Capacity: 136G bps MAC Address Table Size: 64K Forwarding Rate: 10G port – 14,880,000pps 1000Mbps port - 1,488,000pps 100Mbps port - 148,800pps 10Mbps port - 14,880pps Packet Buffer: 64Mb</p>

Chapter 1: Product Overview

Product Overview

<p>L2 Features</p>	<p>Flow Control: 802.3x (Full-duplex)ort/ Back-Pressure (Half-duplex)</p> <p>Spanning Tree: IEEE 802.1D-2004(Includes IEEE 802.1w): Rapid Spanning Tree Protocol 802.1s Multiple Spanning Tree Protocol</p> <p>Loop Detection</p> <p>VLAN: IEEE 802.1Q Tagged Based, Max. VLAN Group: 4K QinQ Port-based VLAN Voice VLAN Private VLAN MVR MAC-Based VLAN Protocol-Based VAN</p> <p>Link Aggregation: IEEE 802.3ad with LACP: 26 trunks/ up to 8 port per trunk Static Trunk: 26 trunks/ up to 8 port per trunk Max. Group:26 Max. Ports/Group:8</p> <p>IGMP Snooping: IGMP Snooping v1/v2/v3 IPv6 MLD Snooping v1/v2 Queries support/ IGMP Filtering, IGMP Leave Proxy, Immediate Leave</p> <p>Storm Control: Broadcast/ Multi-cast/ Un-known Unicast</p> <p>Jumbo Frame Support: 10K</p>
<p>QoS Features</p>	<p>Number of Priority queue: 8 queues/ port</p> <p>Scheduling for priority queue : WRR/Strict Priority scheduling/Hybrid</p> <p>CoS : 802.1p/ IP Precedence/ IP TOS Precedence IP DSCP/ Port based Priority</p> <p>Rate Limiting: Ingress/Egress: 1Kbps/ 1pps granularity</p> <p>DiffServ (RFC2474) remarking</p>

Chapter 1: Product Overview

Product Overview

Security	User Name / Password Protection User Privilege: up to 15 levels IEEE 802.1x: Port-based Access Control IP Source Guard MAC Based Authentication Web-based Authentication HTTPS SSHv2 RADIUS: Authentication/ Accounting TACACS+: Authentication ACL (Access control list)
Management	Command Line Interface (CLI) Web Based Management Telnet Access Management Filtering: SNMP/ WEB/SSH/TELNET/ SNMP: v1/v2c/v3 RMON: RMON (1,2,3, & 9 groups) DHCP: Client/ Relay/ Option82/ Snooping Event/Error Log: Local Flash/ Remote Server Software Download/ Upgrade: HTTP Configuration Download / Upload sFlow Port Mirroring: One to One/ Many to One Remote Ping NTP/LLDP UPnP EEE Configuration Cable Diagnostics IPv6 Configuration
Power Input	100~240VAC
Mechanical	Dimension mm(H*W*D) : 44*440*331 Weight : 3.0 kg
Operating Temperature	0~40°C
Humidity	5~90% (non-condensing)

Hardware Description

This section mainly describes the hardware of the switch and gives a physical and functional overview.


Front Panel

The front panel of the switch consists of 48 10/100/1000 Base-TX RJ-45 ports and 2 10 Gigabit SFP+ ports. The LEDs are also located on the front panel.

LED Indicators

The LED Indicators present real-time information of systematic operation status. Each of the switch's RJ45 port has two LEDs, the green LED indicates RJ45 connection status/data link.

Also, port 49 and port 50 (SFP+ Ports) has their own LEDs that indicate data link status as shown in the figure below:

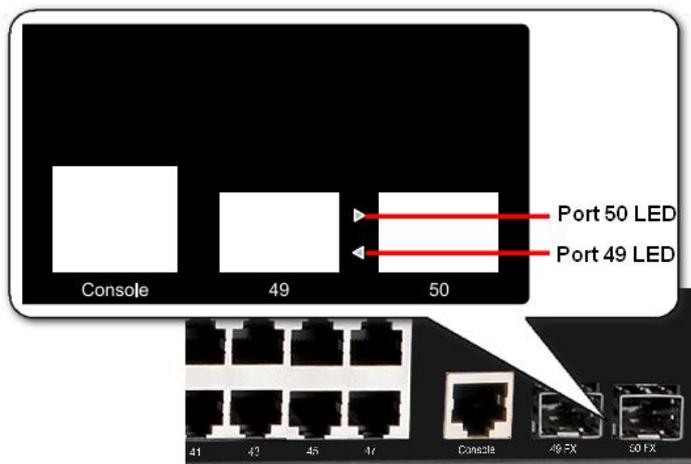

Please see the table down below for detailed descriptions regarding to LED status:

LED	Color / Status	Description	No. of LEDs
10/100/1000M	Green On	Link Up	1~48
	Green Blinking	Data Activating	
SFP+	Green On	Fiber Connected	49~50
	Green Blinking	Receiving/Transmitting Data	49~50

Rear Panel

The rear panel of the switch contains 2 ventilation fans, a power switch, and a IEC 60320 plug for power supply.

Hardware Installation

To install the switch, please place it on a large flat surface with a power socket close by. This surface should be clean, smooth, and level. Also, please make sure that there is enough space around the switch for RJ45 cable, power cord and ventilation.

If you're installing this switch on a 19-inch rack, please make sure to use the rack-mount kit (L brackets) and screws come with the product package. All screws must be fastened so the rack-mount kit and your product are tightly conjoined before installing it on your 19-inch rack.

Ethernet cable Request

The wiring cable types are as below.

10 Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable, EIA/TIA-568 100-ohm (Max. 100m)

100 Base-TX: 2-pair UTP/STP Cat. 5 cable, EIA/TIA-568 100-ohm (Max. 100m)

1000 Base-T: 4-pair UTP/STP Cat. 5 cable, EIA/TIA-568 100-ohm (Max. 100m)

SFP+ Installation

While install the SFP+ transceiver, make sure the SFP type of the 2 ends is the same and the transmission distance, wavelength, fiber cable can meet your request. It is suggested to purchase the SFP+ transceiver with the switch provider to avoid any incompatible issue.

The way to connect the SFP+ transceiver is to Plug in SFP fiber transceiver fist. The SFP+ transceiver has 2 plug for fiber cable, one is TX (transmit), the other is RX (receive). Cross-connect the transmit channel at each end to the receive channel at the opposite end.

For more information regarding to the product safety and maintenance guide, please refer to **Appendix A: Product Safety**.

Chapter 2:

Preparing for Management

In Preparing for Management:

This section will guide your how to manage this product via serial console, management web page, and Telnet/SSH interface.

The switch provides both in-band and out-band configuration methods.

Out-band Management: You can configure the switch via RS232 console cable if you don't attach your admin PC to your network, or if you lose network connection to your switch. It wouldn't be affected by network performance. This is so-called out-band management.


In-Band Management: You can remotely manage the switch via the Web browser, such as Microsoft Internet Explorer, or Mozilla, to configure and interrogate the switch from anywhere on the network.

- **Preparation for Serial Console**
- **Preparation for Web Interface**
- **Preparation for Telnet/SSH Interface**

Preparation for Serial Console

In the package, there is one RS-232 console cable. Please attach one end of the console cable to your PC COM port, the other end to the console port of the switch.

1. Go to Start -> Program -> Accessories -> Communication -> Hyper Terminal
2. Give a name to the new console connection.
3. Choose the COM name
4. Select correct serial settings. The serial settings of the switch are as below:
Baud Rate: 115200 / Parity: None / Data Bit: 8 / Stop Bit: 1
5. After connected, you can see Switch login request.
6. Login the switch. The default username is "admin", password, "admin".

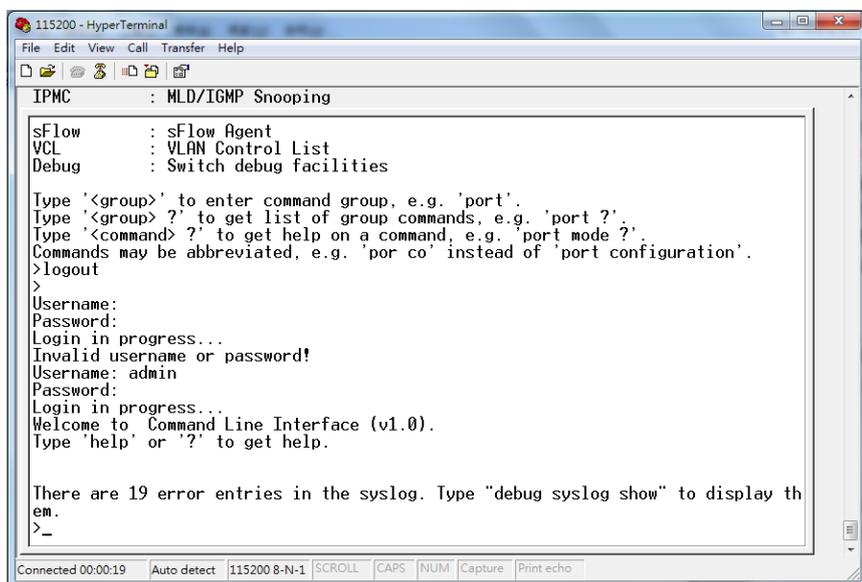

```
115200 - HyperTerminal
File Edit View Call Transfer Help
IPMC      : MLD/IGMP Snooping
sFlow     : sFlow Agent
VCL       : VLAN Control List
Debug     : Switch debug facilities

Type '<group>' to enter command group, e.g. 'port'.
Type '<group> ?' to get list of group commands, e.g. 'port ?'.
Type '<command> ?' to get help on a command, e.g. 'port mode ?'.
Commands may be abbreviated, e.g. 'por co' instead of 'port configuration'.
>logout
>
Username:
Password:
Login in progress...
Invalid username or password!
Username: admin
Password:
Login in progress...
Welcome to Command Line Interface (v1.0).
Type 'help' or '?' to get help.

There are 19 error entries in the syslog. Type "debug syslog show" to display them.
>_
Connected 00:00:19 | Auto detect | 115200 8-N-1 | SCROLL CAPS NUM Capture Print echo
```

Figure 3-1 Hyper Terminal Console Screen

Note: The Win 7 or later OS version doesn't provide Console Terminal tool, please download the tool, Hyper Terminal from Microsoft web site or other terminal tools, such as PuTTY for console connection. Type Hyper Terminal or Putty in Google web site, thus you can find link to download it.

Chapter 2: Preparing for Management

Preparing for Management

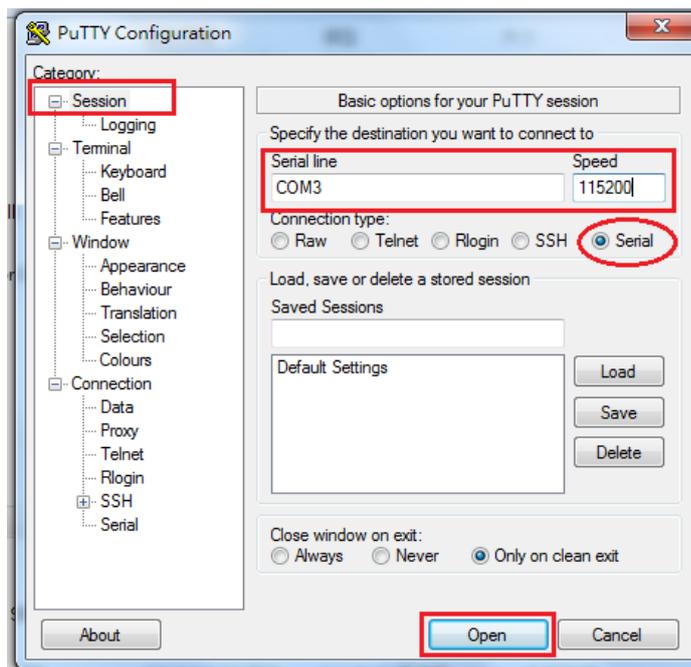


Figure 3-2 Putty Configuration

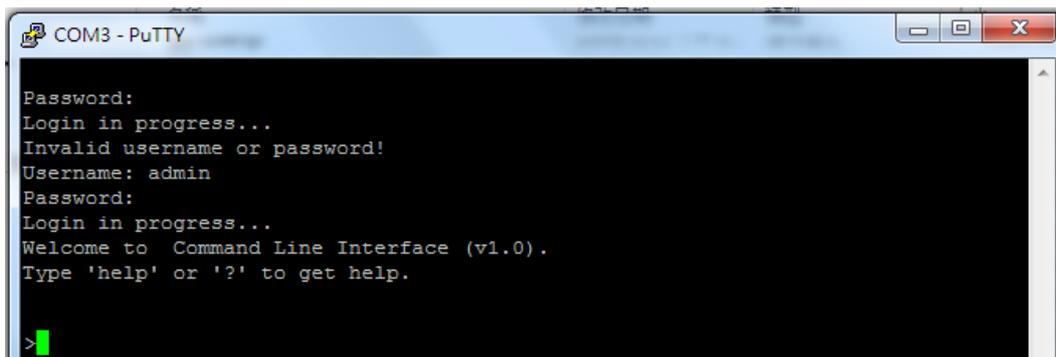



Figure 3-3 Putty Login Screen

Preparation for Web Interface

The web management page allows you to use a standard web-browser such as Microsoft Internet Explorer, Google Chrome or Mozilla Firefox, to configure and interrogate the switch from anywhere on the network.

Before you attempt to use the web user interface to manage switch operation, verify that your Switch is properly installed on your network and that every PC on this network can access the switch via the web browser.

1. Verify that your network interface card (NIC) is operational, and that your operating system supports TCP/IP protocol.
2. Wire the switch power and connect your computer to the switch.
3. The switch default IP address is 192.168.2.1. The Switch and the connected PC should locate within the same IP Subnet.
4. Change your computer's IP address to 192.168.2.XX or other IP address which is located in the 192.168.2.x (For example: IP Address: 192.168.2.30; Subnet Mask: 255.255.255.0) subnet.

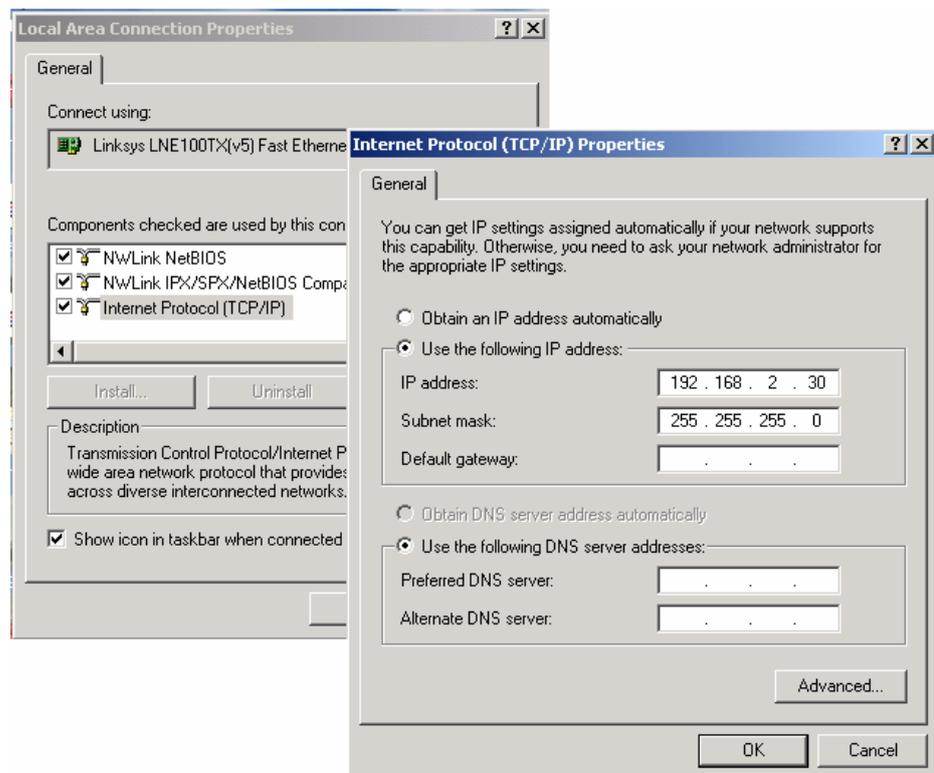

Chapter 2: Preparing for Management

Preparing for Management

5. Launch the web browser and Login.
6. Launch the web browser (Internet Explorer or Mozilla Firefox) on the PC.
7. Type **http://192.168.2.1** (or the IP address of the switch). And then press Enter.
8. The login screen will appear next.
9. Key in the password. Default user name and password are both admin.

If you can't login the switch, the following steps can help you to identify the problem.

1. Switch to DOS command mode and type the "ipconfig" to check the NIC's setting.
Type the "ping 192.168.2.1" to verify a normal response time.
2. Check the security & firewall settings of your computer.
3. Try different Web-browser, like the Mozilla.

For more information, please refer to **Appendix B: IP Configuration for Your PC**.

Preparation for Telnet/SSH Interface

If your Window OS is Win XP, Win 2000 or early version, you can access the Telnet console by default command. If your OS is Window 7 or later version, please download the terminal tool, such as HyperTerminal or Putty.

The switch support both Telnet and SSH console. The SSH console can be treated as secured Telnet connection, need to enable the SSH feature in "Security / Switch / SSH".

Tradition way for Telnet Connection

1. Go to Start -> Run -> cmd. And then press Enter
2. Type the **Telnet 192.168.2.1** (or the IP address of the switch). And then press Enter.


Access Telnet or SSH by Terminal tool, Putty.

1. Open Telnet/SSH Client/PuTTY

In the Session configuration, choose the Telnet/SSH in Protocol field.

In the Session configuration, enter the Host Name (IP Address of your switch) and Port number (default Telnet =23, SSH = 22).

Then click on "Open" to start the SSH session console.

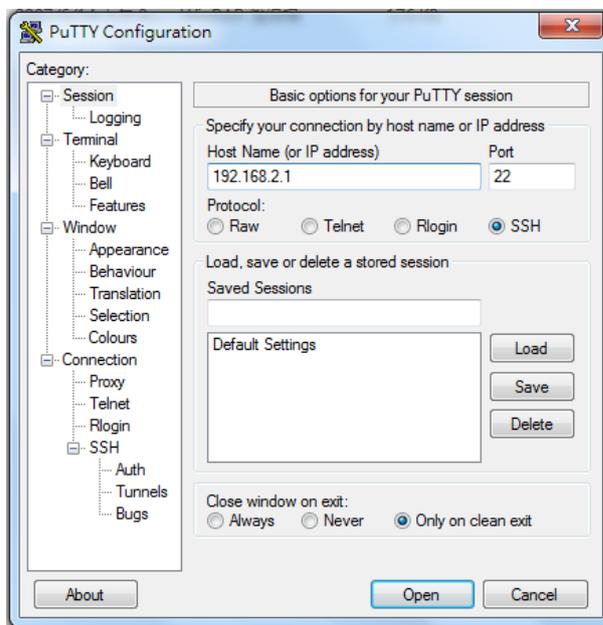

Chapter 2: Preparing for Management


Preparing for Management

2. After click on Open, then you can see the cipher information in the popup screen. Press Yes to accept the Security Alert.

If you choose Telnet connection, there is no such cipher information and window. It goes to next step directly.



3. After few seconds, the Telnet/SSH connection is established, the login page of Telnet/SSH is the same as console. The command line of Telnet, SSH and console are all the same.

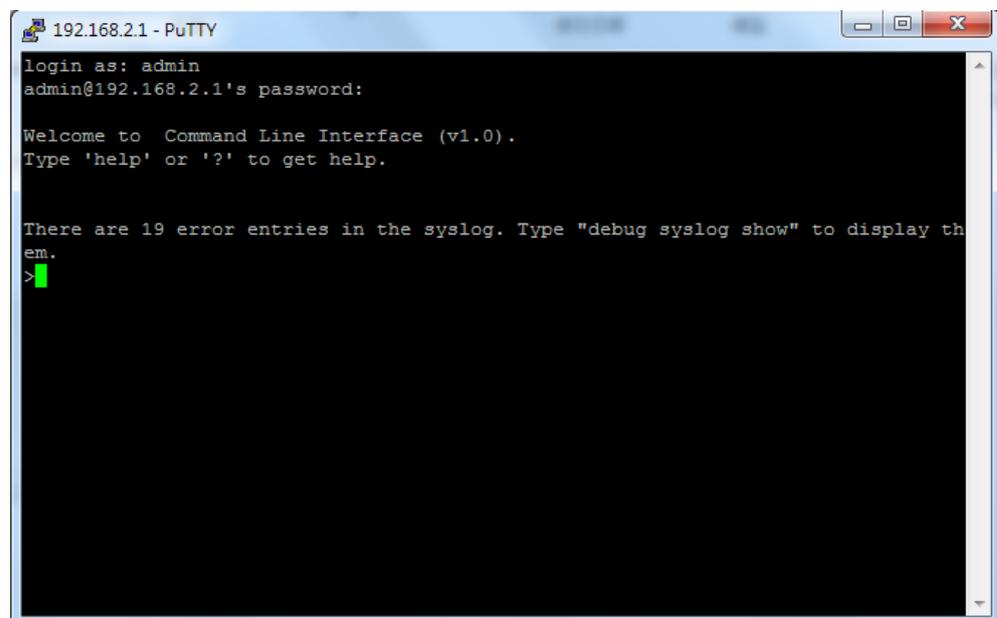

Chapter 3:

Featuring Configuration – Web UI

In Featuring Configuration – Web UI:

The switch provides abundant software features, after login the switch, you can start configuring the settings or monitoring the status. This is one question mark on the right top of the screen, you can also click the question mark to get help from the system.

System Configuration

System Information

This page shows the system information and allows you to configure the new settings.

System Information Configuration

System Contact	<input type="text"/>
System Name	<input type="text"/>
System Location	<input type="text"/>

System Contact

The textual identification of the contact person for this managed node, together with information on how to contact this person. The allowed string length is 0 to 255, and the allowed content is the ASCII characters from 32 to 126.

System Name

An administratively assigned name for this managed node. By convention, this is the node's fully-qualified domain name. A domain name is a text string drawn from the alphabet (A-Za-z), digits (0-9), minus sign (-). No space characters are permitted as part of a name. The first character must be an alpha character. And the first or last character must not be a minus sign. The allowed string length is 0 to 255.

System Location

The physical location of this node(e.g., telephone closet, 3rd floor). The allowed string length is 0 to 255, and the allowed content is the ASCII characters from 32 to 126.

Time zone Offset

Provide the time zone offset relative to UTC/GMT.

The offset is given in minutes east of GMT. The valid range is from -720 to 720 minutes.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

IP Configuration

Configure the switch-managed IP information on this page.

IP Configuration

	Configured	Current
DHCP Client	<input type="checkbox"/>	<input type="button" value="Renew"/>
IP Address	192.168.2.1	192.168.2.1
IP Mask	255.255.255.0	255.255.255.0
IP Router	0.0.0.0	0.0.0.0
VLAN ID	1	1
DNS Server	0.0.0.0	0.0.0.0

IP DNS Proxy Configuration

DNS Proxy

The **Configured** column is used to view or change the IP configuration.

The **Current** column is used to show the active IP configuration.

DHCP Client

Enable the DHCP client by checking this box. If DHCP fails and the configured IP address is zero, DHCP will retry. If DHCP fails and the configured IP address is non-zero, DHCP will stop and the configured IP settings will be used. The DHCP client will announce the configured System Name as hostname to provide DNS lookup.

IP Address

Provide the IP address of this switch in dotted decimal notation.

IP Mask

Provide the IP mask of this switch dotted decimal notation.

IP Router

Provide the IP address of the router in dotted decimal notation.

NTP Provide the IP address of the NTP Server in dotted decimal notation.

DNS Server

Provide the IP address of the DNS Server in dotted decimal notation.

VLAN ID

Provide the managed VLAN ID. The allowed range is 1 to 4095.

DNS Proxy

When DNS proxy is enabled, the switch will relay DNS requests to the current configured DNS server on the switch, and reply as a DNS resolver to the client device on the network.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Renew: Click to renew DHCP. This button is only available if DHCP is enabled.

IPv6 Configuration

Configure the switch-managed IPv6 information on this page:

IPv6 Configuration

	Configured	Current
Auto Configuration	<input checked="" type="checkbox"/>	<input type="button" value="Renew"/>
Address	<input type="text" value="::192.168.2.1"/>	<input type="text" value="::192.168.2.1"/> Link-Local Address: fe80::203:ceff:fe21:85aa
Prefix	<input type="text" value="96"/>	<input type="text" value="96"/>
Router	<input type="text" value="::"/>	<input type="text" value="::"/>

The **Configured** column is used to view or change the IPv6 configuration.

The **Current** column is used to show the active IPv6 configuration.

Auto Configuration

Enable IPv6 auto-configuration by checking this box. If fails, the configured IPv6 address is zero. The router may delay responding to a router solicitation for a few seconds, the total time needed to complete auto-configuration can be significantly longer.

Address

Provide the IPv6 address of this switch. IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, 'fe80::215:c5ff:fe03:4dc7'. The symbol '::' is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, '::192.1.2.34'.

Prefix

Provide the IPv6 Prefix of this switch. The allowed range is 1 to 128.

Router

Provide the IPv6 gateway address of this switch. IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, 'fe80::215:c5ff:fe03:4dc7'.

The symbol '::' is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. . For example, '::192.1.2.34'.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Renew: Click to renew IPv6 AUTOCONF. This button is only available if IPv6

AUTOCONF is enabled.

NTP Configuration

NTP is short of Network Time Protocol. Network Time Protocol (NTP) is used to synchronize time clocks on the internet. You can configure NTP Servers' IP address here to synchronize the clocks of the remote time server on the network.

This page indicates the NTP mode operation:

NTP Configuration

Mode	Disabled <input type="button" value="v"/>
Server 1	<input type="text"/>
Server 2	<input type="text"/>
Server 3	<input type="text"/>
Server 4	<input type="text"/>
Server 5	<input type="text"/>

Mode

The Possible modes are:

Enable NTP mode operation. When NTP mode operation is enabled, the agent forwards NTP messages between the clients and the server when they are not on the same subnet domain.

Disable NTP mode operation.

Server

Provide the NTP IPv4 or IPv6 address of this switch. IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, 'fe80::215:c5ff:fe03:4dc7'. The symbol '::' is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, ':::192.1.2.34'.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Time Configuration

You can set the time of the system here in this page. The configurations available allow you to set the time zone and daylight saving time.

Time Zone Configuration

Time Zone Configuration	
Time Zone	None <input type="button" value="v"/>
Acronym	<input type="text"/> (0 - 16 characters)

Daylight Saving Time Configuration

Daylight Saving Time Mode	
Daylight Saving Time	Disabled <input type="button" value="v"/>

Start Time settings	
Month	Jan <input type="button" value="v"/>
Date	1 <input type="button" value="v"/>
Year	2000 <input type="button" value="v"/>
Hours	0 <input type="button" value="v"/>
Minutes	0 <input type="button" value="v"/>
End Time settings	
Month	Jan <input type="button" value="v"/>
Date	1 <input type="button" value="v"/>
Year	2000 <input type="button" value="v"/>
Hours	0 <input type="button" value="v"/>
Minutes	0 <input type="button" value="v"/>
Offset settings	
Offset	1 (1 - 1440) Minutes

Time Zone

Here you can use the scroll-down menu to set the time zone where your switch is located.

Acronym

Here you can input the Time Zone Abbreviations. You can input up to 16 characters here.

Daylight Saving Time

Disable or Enable the daylight saving time here with the scroll-down menu.

Start Time Settings

Input the time to start daylight saving time here.

End Time Settings

Input the time to end daylight saving time here.

Offset Settings

Offset is the difference in hours and minutes from Coordinated Universal Time (UTC) for a particular place and date. Here you can set the offset time in minutes.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

System Log Configuration

System Log is useful to provide system administrator monitor switch events history. The switch supports syslog server mode. User can install the syslog server in one computer, then configure the server address and event types in the switch's system log configuration. When the events occur, the switch will send information or warning message to the syslog server. The administrator can analysis the system logs recorded in the syslog server to find out the cause of the issues.

The switch Web UI allows you to Enable the Syslog Server, assign the IP address and assign the syslog level.

System Log Configuration

Server Mode	Disabled
Server Address	
Syslog Level	Info

Server Mode

Indicates the server mode operation. When the mode operation is enabled, the syslog message will send out to syslog server. The syslog protocol is based on UDP communication and received on UDP port 514 and the syslog server will not send acknowledgments back sender since UDP is a connectionless protocol and it does not provide acknowledgments. The syslog packet will always send out even if the syslog server does not exist. Possible modes are:

Enable server mode operation.

Disable server mode operation.

Server Address

Indicates the IPv4 host address of syslog server. If the switch provide DNS feature, it also can be a host name.

Syslog Level

Indicates what kind of message will send to syslog server. Possible modes are:

Info: Send information, warnings and errors.

Warning: Send warnings and errors.

Error: Send errors.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Power Reduction

EEE Configuration:

This page allows the user to inspect and configure the current EEE port settings:

EEE Configuration

Port	Enabled
*	<input type="checkbox"/>
1	<input type="checkbox"/>
2	<input type="checkbox"/>
3	<input type="checkbox"/>
4	<input type="checkbox"/>
5	<input type="checkbox"/>
6	<input type="checkbox"/>
7	<input type="checkbox"/>

40	<input type="checkbox"/>
41	<input type="checkbox"/>
42	<input type="checkbox"/>
43	<input type="checkbox"/>
44	<input type="checkbox"/>
45	<input type="checkbox"/>
46	<input type="checkbox"/>
47	<input type="checkbox"/>
48	<input type="checkbox"/>
49	<input type="checkbox"/>
50	<input type="checkbox"/>

EEE is a power saving option that reduces the power usage when there is very low traffic utilization (or no traffic).

EEE works by powering down circuits when there is no traffic. When a port gets data to be transmitted all circuits are powered up. The time it takes to power up the circuits is named wakeup time. The default wakeup time is 17 us for 1Gbit links and 30 us for other link speeds. EEE devices must agree upon the value of the wakeup time in order to make sure that both the receiving and transmitting device has all circuits powered up when traffic is transmitted. The devices can exchange information about the devices wakeup time using the LLDP protocol.

For maximizing the power saving, the circuit isn't started at once transmit data are ready for a port, but is instead queued until 3000 bytes of data are ready to be

transmitted. For not introducing a large delay in case that data less than 3000 bytes shall be transmitted, data are always transmitted after 48 us, giving a maximum latency of 48 us + the wakeup time.

If desired it is possible to minimize the latency for specific frames, by mapping the frames to a specific queue (done with QOS), and then mark the queue as an urgent queue. When an urgent queue gets data to be transmitted, the circuits will be powered up at once and the latency will be reduced to the wakeup time.

Port

The switch port number of the logical EEE port.

EEE Enabled

Controls whether EEE is enabled for this switch port.

EEE Urgent Queues

Queues set will activate transmission of frames as soon as any data is available.

Otherwise the queue will postpone the transmission until 3000 bytes are ready to be transmitted.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Port Configuration

This page displays current port configurations and link status. Some of the Ports' settings can also be configured here.

Port Configuration

Port	Link	Speed		Flow Control			Maximum Frame Size	Excessive Collision Mode	Power Control			
		Current	Configured	Current Rx	Current Tx	Configured						
*		<>	▼			<input type="checkbox"/>	10056	<>	▼	<>	▼	
1	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
2	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
3	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
4	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
5	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
6	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
7	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
8	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
9	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
10	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
11	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
12	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
13	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
14	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
15	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
16	● 1Gfdx	1Gfdx	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
17	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼
18	● Down	Down	Auto	▼	✗	✗	<input type="checkbox"/>	10056	Discard	▼	Disabled	▼

Port

This is the port number for this row.

Link

The current link state is displayed graphically.

Green indicates the link is up and red that it is down.

Current Link Speed

Provides the current link speed of the port.

Ex: 1Gfdx: 1G indicates the Gigabit Speed, fdx indicates the Full Duplex Mode.

Configured Link Speed

Select any available link speed for the given switch port.

Auto Speed: selects the highest speed that is compatible with a link partner.

Disabled: disables the switch port operation.

Disable 10G FDX Fiber

You can disable/enable 10G FDX Fiber here.

Flow Control

When Auto Speed is selected on a port, this section indicates the flow control capability that is advertised to the link partner.

When a fixed-speed setting is selected, that is what is used. The Current Rx column indicates whether pause frames on the port are obeyed, and the Current Tx column indicates whether pause frames on the port are transmitted. The Rx and Tx settings are determined by the result of the last Auto-Negotiation.

Check the configured column to use flow control. This setting is related to the setting for Configured Link Speed.

Maximum Frame Size

Enter the maximum frame size allowed for the switch port, including FCS. The switch supports up to 9K Jumbo Frame.

Excessive Collision Mode

Configure port transmit collision behavior.

Discard: Discard frame after 16 collisions (default).

Restart: Restart backoff algorithm after 16 collisions.

Power Control

The Usage column shows the current percentage of the power consumption per port. The Configured column allows for changing the power savings mode parameters per port.

Disabled: All power savings mechanisms disabled.

ActiPHY: Link down power savings enabled.

PerfectReach: Link up power savings enabled.

Enabled: Both link up and link down power savings enabled.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Refresh: Click to refresh the page. Any changes made locally will be undone.

Security Configuration:

The Security Configuration feature includes 3 sub-titles, Switch, Network and AAA.

Security / Switch

The switch settings includes User Database, Privilege Levels, Authentication Method, SSH, HTTPs, Access Management, SNMP and RMON setting. Following are the topic and configuration guide.

Security / Switch / Users Configuration

This page provides an overview of the current users. Currently the only way to login as another user on the web server is to close and reopen the browser.

This page configures a user: This is also a link to Add User & Edit User

Users Configuration

User Name	Privilege Level
admin	15

Add New User

Add New User/Edit User

Click "Add New User", the configuration page goes to "Add User" screen. You can see the User Setting table, follow the below instruction to fill the table.

Add User

User Settings	
User Name	<input type="text"/>
Password	<input type="password"/>
Password (again)	<input type="password"/>
Privilege Level	1 <input type="text"/>

Save Reset Cancel

Click the created User Name, the page goes to "Edit User" screen, you can change the settings on it.

User Name

A string identifying the user name that this entry should belong to. The allowed string length is 1 to 32. The valid user name is a combination of letters, numbers and underscores.

Password

The password of the user. The allowed string length is 0 to 32.

Privilege Level

The privilege level of the user. The allowed range is 1 to 15.

If the privilege level value is 15, it can access all groups, i.e. that is granted the fully control of the device. But others value need to refer to each group privilege level. User's privilege should be same or greater than the group privilege level to have the access of that group.

By default setting, most groups privilege level 5 has the read-only access and privilege level 10 has the read-write access. And the system maintenance (software upload, factory defaults and etc.) need user privilege level 15. Generally, the privilege level 15 can be used for an administrator account, privilege level 10 for a standard user account and privilege level 5 for a guest account.

Check the next chapter to see how to configure privilege level.

Buttons

Add new user: Click to add a new user.

Security / Switch / Privilege Levels Configuration

This page provides an overview of the privilege levels.

Privilege Level Configuration

Group Name	Privilege Levels			
	Configuration Read-only	Configuration/Execute Read/write	Status/Statistics Read-only	Status/Statistics Read/write
Aggregation	5	10	5	10
Debug	15	15	15	15
Diagnostics	5	10	5	10
EEE	5	10	5	10
IP	5	10	5	10
IPMC_LIB	5	10	5	10
IPMC_Snooping	5	10	5	10
LACP	5	10	5	10
LLDP	5	10	5	10
LLDP_MED	5	10	5	10
Loop_Protect	5	10	5	10
MAC_Table	5	10	5	10
MVR	5	10	5	10

Group Name

The name identifying the privilege group. In most cases, a privilege level group consists of a single module (e.g. LACP, RSTP or QoS), but a few of them contains more than one.

The table down below lists the functions that can be set here in the privilege levels:

Aggregation	Debug	Diagnostics	EEE
IP	IPMC_LIB	IPMC_Snooping	LACP
LLDP	LLDP_MED	Loop_Protect	MAC_Table
MVR	Maintenance	Mirroring	PHY
Port_Security	Ports	Private_VLANs	QoS
SNMP	Security	Spanning_Tree	Voice_VLAN
System	Timer	UPnP	VCL
VLANs	sFlow		

Privilege Levels

Every group has an authorization Privilege level for the following sub groups: configuration read-only, configuration/execute read-write, status/statistics read-only, status/statistics read-write (e.g. for clearing of statistics).

Insufficient Privilege Level

The web page is non-accessable. Please use the valid privilege level.

User Privilege should be same or greater than the authorization Privilege level to have the access to that group.

Insufficient Privilege Level: If you login with lower level privilege and try to access the high privilege level configuration feature, the following message, Insufficient Privilege Level will appear. If you want continue, be sure that you have the privilege.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Security / Switch / Auth Method

This page allows you to configure how a user is authenticated when he logs into the switch via one of the management client interfaces.

The table has one row for each client type and a number of columns, which are:

Authentication Method Configuration

Client	Authentication Method	Fallback
console	local	<input type="checkbox"/>
telnet	local	<input type="checkbox"/>
ssh	local	<input type="checkbox"/>
web	local	<input type="checkbox"/>

Client

The management client for which the configuration below applies.

Authentication Method

Authentication Method can be set to one of the following values:

none: authentication is disabled and login is not possible.

local: use the local user database on the switch for authentication.

RADIUS: use a remote RADIUS server for authentication.

TACACS+: use a remote TACACS server for authentication.

Authentication Method Configuration

Client	Authentication Method	Fallback
console	local	<input type="checkbox"/>
telnet	none	<input type="checkbox"/>
ssh	local	<input type="checkbox"/>
web	RADIUS	<input type="checkbox"/>
	TACACS+	<input type="checkbox"/>

Fallback

Enable fallback to local authentication by checking this box.

If none of the configured authentication servers are alive, the local user database is used for authentication.

This is only possible if the Authentication Method is set to a value other than 'none' or 'local'.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Security /Switch / SSH Configuration

With SSH, you can remotely connect to the switch by command line interface. The SSH connection can secure all the configuration commands you sent to the switch. It is also known as secured Telnet console.

To access the switch by SSH, you should install SSH client on you computer, such as PuTTY console tool. In the switch side, the switch acts as SSH server for user login, and you can Enable or Disable SSH on this page.

Please check the chapter **Preparation for Telnet/SSH** to see how to manage the switch through SSH console.

SSH Configuration

Mode	Enabled	▼
Save	Reset	

Mode

Indicates the SSH mode operation. Possible modes are:

Enable: Enable SSH mode operation.

Disabled: Disable SSH mode operation.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Security / Switch / HTTPS Configuration

The web management page also provides secured management HTTPS login. All the configuration commands will be secured and will be hard for the hackers to sniff the login password and configuration commands.

This page allows you to configure HTTPS mode.

HTTPS Configuration

Mode	Enabled	▼
Automatic Redirect	Disabled	▼

Mode

Indicates the HTTPS mode operation. Possible modes are:

Enable: Enable HTTPS mode operation.

Disabled: Disable HTTPS mode operation.

Automatic Redirect

Indicates the HTTPS redirect mode operation. Automatically redirect web browser to HTTPS when HTTPS mode is enabled. Possible modes are:

Enable: Enable HTTPS redirect mode operation.

Disabled: Disable HTTPS redirect mode operation.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Security / Switch / Access Management Configuration

The Access Management mode allows user to limit the switch access with specific range of IP address and disable some remote management service, such HTTP, HTTPS, SNMP, Telnet and SSH. This feature is important while user installed the switch on network. After enabled the Access Management, only the pre-configured IP address or a range of IP address can access the switch management interface, and only the available service can be accessed.

Configure access management table on this page. The maximum entry number is 16. If the application's type match any one of the access management entries, it will allow access to the switch.

Example of the below figure, only the IP Addresses range from 192.168.2.101 to 192.168.2.200 can access the switch's management interface. The available services are HTTP, HTTPS, SNMP, Telnet and SSH. If there is one IP address, 192.168.2.201 try to open the web management interface, it is not allowed.

Access Management Configuration

Mode Enabled ▾

Delete	Start IP Address	End IP Address	HTTP/HTTPS	SNMP	TELNET/SSH
<input type="checkbox"/>	192.168.2.101	192.168.2.200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Add New Entry

Save Reset

Mode

Indicates the access management mode operation. Possible modes are:

Enable: Enable access management mode operation.

Disabled: Disable access management mode operation.

Delete

Check to delete the entry. It will be deleted during the next save.

Start IP address

Indicates the start IP address for the access management entry.

End IP address

Indicates the end IP address for the access management entry.

With the Start and End IP address, you can assign a range of IP addresses.

HTTP/HTTPS

Indicates that the host can access the switch from HTTP/HTTPS interface if the host IP address matches the IP address range provided in the entry.

SNMP

Indicates that the host can access the switch from SNMP interface if the host IP address matches the IP address range provided in the entry.

TELNET / SSH

Indicates that the host can access the switch from TELNET/SSH interface if the host IP address matches the IP address range provided in the entry.

Buttons

Add New Entry: Click to add a new group entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

Security / Switch / SNMP

Simple Network Management Protocol (SNMP) is a protocol used for exchanging management information between network devices. The switch supports SNMP and equips lots of OIDs for remote management. All the OIDs are unique and corresponding to one feature/command.

The switch can support SNMP V1, V2c and V3. The following commands show how to configure SNMP and its related parameters.

SNMP System Configuration

Mode	Enabled
Version	SNMP v2c
Read Community	public
Write Community	private
Engine ID	800007e5017f000001

Mode

Indicates the SNMP mode operation. Possible modes are:

Enable: Enable SNMP mode operation.

Disabled: Disable SNMP mode operation.

Version

Indicates the SNMP supported version. Possible versions are:

SNMPv1: Set SNMP supported version 1.

SNMPv2c: Set SNMP supported version 2c.

SNMPv3: Set SNMP supported version 3.

Read Community

Indicates the community read access string to permit access to SNMP agent. The allowed string length is 0 to 255, and the allowed content is the ASCII characters from 33 to 126.

The field is applicable only when SNMP version is SNMPv1 or SNMPv2c. If SNMP version is SNMPv3, the community string will be associated with SNMPv3 communities table. It provides more flexibility to configure security name than a SNMPv1 or SNMPv2c community string. In addition to community string, a particular range of source addresses can be used to restrict source subnet.

Write Community

Indicates the community write access string to permit access to SNMP agent. The allowed string length is 0 to 255, and the allowed content is the ASCII characters from 33 to 126.

The field is applicable only when SNMP version is SNMPv1 or SNMPv2c. If SNMP version is SNMPv3, the community string will be associated with SNMPv3 communities table. It provides more flexibility to configure security name than a SNMPv1 or SNMPv2c community string. In addition to community string, a particular range of source addresses can be used to restrict source subnet.

Engine ID

Indicates the SNMPv3 engine ID. The string must contain an even number (in hexadecimal format) with number of digits between 10 and 64, but all-zeros and all-'F's are not allowed. Change of the Engine ID will clear all original local users.

SNMP Trap Configuration

Configure SNMP trap on this page.

SNMP Trap Configuration

Trap Mode	Disabled
Trap Version	SNMP v1
Trap Community	public
Trap Destination Address	
Trap Destination IPv6 Address	::
Trap Authentication Failure	Enabled
Trap Link-up and Link-down	Enabled
Trap Inform Mode	Enabled
Trap Inform Timeout (seconds)	1
Trap Inform Retry Times	5

Trap Mode

Indicates the SNMP trap mode operation. Possible modes are:

Enable: Enable SNMP trap mode operation.

Disabled: Disable SNMP trap mode operation.

Trap Version

Indicates the SNMP trap supported version. Possible versions are:

SNMPv1: Set SNMP trap supported version 1.

SNMPv2c: Set SNMP trap supported version 2c.

SNMPv3: Set SNMP trap supported version 3.

Trap Community

Indicates the community access string when sending SNMP trap packet. The allowed string length is 0 to 255, and the allowed content is ASCII characters from 33 to 126.

Trap Destination Address

Indicates the SNMP trap destination address.

Trap Destination IPv6 Address

Provide the trap destination IPv6 address of this switch. IPv6 address is in 128-bit records represented as eight fields of up to four hexadecimal digits with a colon separating each field (:). For example, 'fe80::215:c5ff:fe03:4dc7'. The symbol '::' is a special syntax that can be used as a shorthand way of representing multiple 16-bit groups of contiguous zeros; but it can only appear once. It can also represent a legally valid IPv4 address. For example, ':::192.1.2.34'.

Trap Authentication Failure

Indicates that the SNMP entity is permitted to generate authentication failure traps.
Possible modes are:

Enable: SNMP trap authentication failure.

Disabled: Disable SNMP trap authentication failure.

Trap Link-up and Link-down

Indicates the SNMP trap link-up and link-down mode operation. Possible modes are:

Enable: Enable SNMP trap link-up and link-down mode operation.

Disabled: Disable SNMP trap link-up and link-down mode operation.

Trap Inform Mode

Indicates the SNMP trap inform mode operation. Possible modes are:

Enable: Enable SNMP trap inform mode operation.

Disabled: Disable SNMP trap inform mode operation.

Trap Inform Timeout (seconds)

Indicates the SNMP trap inform timeout. The allowed range is 0 to 2147.

Trap Inform Retry Times

Indicates the SNMP trap inform retry times. The allowed range is 0 to 255.

Trap Probe Security Engine ID

Indicates the SNMP trap probe security engine ID mode of operation. Possible values are:

Enable: Enable SNMP trap probe security engine ID mode of operation.

Disabled: Disable SNMP trap probe security engine ID mode of operation.

Trap Security Engine ID

Indicates the SNMP trap security engine ID. SNMPv3 sends traps and informs using USM for authentication and privacy. A unique engine ID for these traps and informs is needed. When "Trap Probe Security Engine ID" is enabled, the ID will be probed automatically. Otherwise, the ID specified in this field is used. The string must contain an even number(in hexadecimal format) with number of digits between 10 and 64, but all-zeros and all-'F's are not allowed.

Trap Security Name

Indicates the SNMP trap security name. SNMPv3 traps and informs using USM for authentication and privacy. A unique security name is needed when traps and informs are enabled.

Buttons

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

SNMPv3 Community Configuration

In SNMP V3, it start to support User Name and its privilege. You can configure SNMPv3 community table on this page:

The entry index key is Community.

SNMPv3 Community Configuration

Delete	Community	Source IP	Source Mask
<input type="checkbox"/>	public	0.0.0.0	0.0.0.0
<input type="checkbox"/>	private	0.0.0.0	0.0.0.0

Delete

Check to delete the entry. It will be deleted during the next save.

Community

Indicates the community access string to permit access to SNMPv3 agent. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126. The community string will be treated as security name and map a SNMPv1 or SNMPv2c community string.

Source IP

Indicates the SNMP access source address. A particular range of source addresses can be used to restrict source subnet when combined with source mask.

Source Mask

Indicates the SNMP access source address mask.

Buttons

Add new community: Click to add a new community entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

SNMPv3 User Configuration

Configure SNMPv3 user table on this page. The entry index keys are Engine ID and User Name.

SNMPv3 User Configuration

Delete	Engine ID	User Name	Security Level	Authentication Protocol	Authentication Password	Privacy Protocol	Privacy Password
<input type="checkbox"/>	800007e5017f000001	default_user	NoAuth, NoPriv	None	None	None	None

Delete

Check to delete the entry. It will be deleted during the next save.

Engine ID

An octet string identifying the engine ID that this entry should belong to. The string must contain an even number (in hexadecimal format) with number of digits between 10 and 64, but all-zeros and all-'F's are not allowed. The SNMPv3 architecture uses the User-based Security Model (USM) for message security and the View-based Access Control Model (VACM) for access control. For the USM entry, the user Engine ID and user User Name are the entry's keys. In a simple agent, user Engine ID is always that agent's own snmp Engine ID value. The value can also take the value of the snmp Engine ID of a remote SNMP engine with which this user can communicate. In other words, if user engine ID equal system engine ID then it is local user; otherwise it's remote user.

User Name

A string identifying the user name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Security Level

Indicates the security model that this entry should belong to. Possible security models are:

NoAuth, NoPriv: No authentication and no privacy.

Auth, NoPriv: Authentication and no privacy.

Auth, Priv: Authentication and privacy.

The value of security level cannot be modified if entry already exists. That means it must first be ensured that the value is set correctly.

Authentication Protocol

Indicates the authentication protocol that this entry should belong to. Possible authentication protocols are:

None: No authentication protocol.

MD5: An optional flag to indicate that this user uses MD5 authentication protocol.

SHA: An optional flag to indicate that this user uses SHA authentication protocol.

The value of security level cannot be modified if entry already exists. That means must first ensure that the value is set correctly.

Authentication Password

A string identifying the authentication password phrase. For MD5 authentication protocol, the allowed string length is 8 to 32. For SHA authentication protocol, the allowed string length is 8 to 40. The allowed content is ASCII characters from 33 to 126.

Privacy Protocol

Indicates the privacy protocol that this entry should belong to. Possible privacy protocols are:

None: No privacy protocol.

DES: An optional flag to indicate that this user uses DES authentication protocol.

Privacy Password

A string identifying the privacy password phrase. The allowed string length is 8 to 32, and the allowed content is ASCII characters from 33 to 126.

Buttons

Add new user: Click to add a new user entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

SNMPv3 Group Configuration

Configure SNMPv3 group table on this page:

The entry index keys are Security Mode and Security Name.

SNMPv3 Group Configuration

Delete	Security Model	Security Name	Group Name
<input type="checkbox"/>	v1	public	default_ro_group
<input type="checkbox"/>	v1	private	default_rw_group
<input type="checkbox"/>	v2c	public	default_ro_group
<input type="checkbox"/>	v2c	private	default_rw_group
<input type="checkbox"/>	usm	default_user	default_rw_group

Delete

Check to delete the entry. It will be deleted during the next save.

Security Model

Indicates the security model that this entry should belong to. Possible security models are:

v1: Reserved for SNMPv1.

v2c: Reserved for SNMPv2c.

usm: User-based Security Model (USM).

Security Name

A string identifying the security name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Group Name

A string identifying the group name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Buttons

Add new group: Click to add a new group entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

SNMPv3 View Configuration

Configure SNMPv3 view table on this page.

SNMPv3 View Configuration

Delete	View Name	View Type	OID Subtree
<input type="checkbox"/>	default_view	included ▾	.1

The entry index keys are View Name and OID Sub-tree.

Delete

Check to delete the entry. It will be deleted during the next save.

View Name

A string identifying the view name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

View Type

Indicates the view type that this entry should belong to. Possible view types are:

Included: An optional flag to indicate that this view sub-tree should be included.

excluded: An optional flag to indicate that this view sub-tree should be excluded.

In general, if a view entry's view type is 'excluded', there should be another view entry existing with view type as 'included' and its OID sub-tree should overstep the 'excluded' view entry.

OID Subtree

The OID defining the root of the sub-tree to add to the named view. The allowed OID length is 1 to 128. The allowed string content is digital number or asterisk(*).

Buttons

Add new view: Click to add a new view entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

SNMPv3 Access Configuration

Configure SNMPv3 access table on this page. The entry index keys are Group Name, Security Model, and Security Level.

SNMPv3 Access Configuration

Delete	Group Name	Security Model	Security Level	Read View Name	Write View Name
<input type="checkbox"/>	default_ro_group	any	NoAuth, NoPriv	default_view ▾	None ▾
<input type="checkbox"/>	default_rw_group	any	NoAuth, NoPriv	default_view ▾	default_view ▾

Delete

Check to delete the entry. It will be deleted during the next save.

Group Name

A string identifying the group name that this entry should belong to. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Security Model

Indicates the security model that this entry should belong to. Possible security models are:

Any: Any security model accepted(v1|v2c|usm).

V1: Reserved for SNMPv1.

V2c: Reserved for SNMPv2c.

Usm: User-based Security Model (USM).

Security Level: Indicates the security model that this entry should belong to.

Possible security models are:

NoAuth, NoPriv: No authentication and no privacy.

Auth, NoPriv: Authentication and no privacy.

Auth,Priv: Authentication and privacy.

Read View Name

The name of the MIB view defining the MIB objects for which this request may request the current values. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Write View Name

The name of the MIB view defining the MIB objects for which this request may potentially set new values. The allowed string length is 1 to 32, and the allowed content is ASCII characters from 33 to 126.

Buttons

Add new access: Click to add a new access entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

RMON Statistics Configuration

RMON is short of Remote Monitoring On Network. An RMON implementation typically operates in a client/server model. Monitoring device (Probe) contains RMON software agents that collect information of the system and ports. The RMON software agent acts as server, and the network management system (NMS) that communicate with it acts as client. The RMON agent of the switch supports 4 groups, such as the Statistics, History, Alarm and Event.

RMON Group	Function	Elements
Statistics	Contains statistics measured by the probe for each monitored interface on this device. Real-time LAN statistics e.g. utilization, collisions, CRC errors	Packets dropped, packets sent, bytes sent (octets), broadcast packets, multicast packets, CRC errors, undersize packets, oversize packets, fragments, jabbers, collisions, and counters for packets ranging from 64, 65 to 127, 128 to 255, 256 to 511, 512 to 1023, and 1024 to 1518 bytes.
History	Records periodic statistical samples from a network and stores for retrieval.	History of above Statistics.
Alarm	Definitions for RMON SNMP traps to be sent when statistics exceed defined thresholds	Interval for sampling, particular variable, sample type, value of statistics during the last sampling period, startup alarm, rising threshold, rising index, falling threshold, falling index.
Events	Controls the generation and notification of events from this device.	Event index, log index, event log time, event description

The NMS can get the above information through remotely polling. The information from the switch can be collected, analyzed and displayed as table or graphic...etc.

RMON Statistics Configuration

Configure RMON Statistics table on this page. The entry index key is ID.

RMON Statistics Configuration

Delete	ID	Data Source
<input type="checkbox"/>		
<input type="button" value="Add New Entry"/>	<input type="button" value="Save"/>	<input type="button" value="Reset"/>

Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Data Source

Indicates the port ID which wants to be monitored. If in stacking switch, the value must add 1000*(switch ID-1), for example, if the port is switch 3 port 5, the value is 2005

Buttons

Add new entry: Click to add a new community entry

Save: Click to save changes

Reset: Click to undo any changes made locally and revert to previously saved values

RMON History Configuration

Configure RMON History table on this page. The entry index key is ID

RMON History Configuration

Delete	ID	Data Source	Interval	Buckets	Buckets Granted
--------	----	-------------	----------	---------	-----------------

Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Data Source

Indicates the port ID which wants to be monitored. If in stacking switch, the value must add 1000*(switch ID-1), for example, if the port is switch 3 port 5, the value is 2005.

Interval

Indicates the interval in seconds for sampling the history statistics data. The range is from 1 to 3600, default value is 1800 seconds.

Buckets

Indicates the maximum data entries associated this History control entry stored in RMON. The range is from 1 to 3600, default value is 50.

Buckets Granted

The number of data shall be saved in the RMON.

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

RMON Alarm Configuration

Configure RMON Alarm table on this page. The entry index key is ID.

RMON Alarm Configuration

Delete	ID	Interval	Variable	Sample Type	Value	Startup Alarm	Rising Threshold	Rising Index	Falling Threshold	Falling Index
--------	----	----------	----------	-------------	-------	---------------	------------------	--------------	-------------------	---------------

Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Interval

Indicates the interval in seconds for sampling and comparing the rising and falling threshold. The range is from 1 to $2^{31}-1$.

Variable

Indicates the particular variable to be sampled, the possible variables are:

InOctets:The total number of octets received on the interface, including framing characters.

InUcastPkts:The number of uni-cast packets delivered to a higher-layer protocol.

InNUcastPkts: The number of broad-cast and multi-cast packets delivered to a higher-layer protocol.

InDiscards: The number of inbound packets that are discarded even the packets are normal.

InErrors: The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

InUnknownProtos: The number of the inbound packets that were discarded because of the unknown or un-support protocol.

OutOctets: The number of octets transmitted out of the interface , including framing characters.

OutUcastPkts: The number of uni-cast packets that request to transmit.

OutNUcastPkts: The number of broad-cast and multi-cast packets that request to transmit.

OutDiscards: The number of outbound packets that are discarded event the packets is normal.

OutErrors: The number of outbound packets that could not be transmitted because of errors.

OutQlen: The length of the output packet queue (in packets).

Sample Type

The method of sampling the selected variable and calculating the value to be compared against the thresholds, possible sample types are:

Absolute: Get the sample directly.

Delta: Calculate the difference between samples (default).

Value

The value of the statistic during the last sampling period.

Startup Alarm

The method of sampling the selected variable and calculating the value to be compared against the thresholds, possible sample types are:

Rising Trigger alarm when the first value is larger than the rising threshold.

Falling Trigger alarm when the first value is less than the falling threshold.

RisingOrFalling Trigger alarm when the first value is larger than the rising threshold or less than the falling threshold (default).

Rising Threshold

Rising threshold value (-2147483648-2147483647).

Rising Index

Rising event index (1-65535).

Falling Threshold

Falling threshold value (-2147483648-2147483647)

Falling Index

Falling event index (1-65535).

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

RMON Event Configuration

Configure RMON Event table on this page. The entry index key is ID.

RMON Event Configuration

Delete	ID	Desc	Type	Community	Event Last Time
--------	----	------	------	-----------	-----------------

Delete

Check to delete the entry. It will be deleted during the next save.

ID

Indicates the index of the entry. The range is from 1 to 65535.

Desc

Indicates this event, the string length is from 0 to 127, default is a null string.

Type

Indicates the notification of the event, the possible types are:

None: The total number of octets received on the interface, including framing characters.

Log: The number of uni-cast packets delivered to a higher-layer protocol.

Snmpttrap: The number of broad-cast and multi-cast packets delivered to a higher-layer protocol.

Logandtrap: The number of inbound packets that are discarded even the packets are normal.

Community

Specify the community when trap is sent, the string length is from 0 to 127, default is "public".

Event Last Time

Indicates the value of sysUp Time at the time this event entry last generated an event.

Buttons

Add new entry: Click to add a new community entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Security /Network

Port Security Limit Control Configuration

This page allows you to configure the Port Security Limit Control system and port settings.

Port Security Limit Control Configuration

System Configuration

Mode	Disabled <input type="button" value="v"/>
Aging Enabled	<input type="checkbox"/>
Aging Period	3600 seconds

Port Configuration

Port	Mode	Limit	Action	State	Re-open
*	<> <input type="button" value="v"/>	4	<> <input type="button" value="v"/>		
1	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
2	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
3	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
4	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
5	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
6	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
7	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
8	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
9	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
10	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
11	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
12	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
13	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen
14	Disabled <input type="button" value="v"/>	4	None <input type="button" value="v"/>	Disabled	Reopen

Limit Control allows for limiting the number of users on a given port. A user is identified by a MAC address and VLAN ID. If Limit Control is enabled on a port, the limit specifies the maximum number of users on the port. If this number is exceeded, an action is taken. The action can be one of the four different actions as described below.

The Limit Control module utilizes a lower-layer module, Port Security module, which manages MAC addresses learnt on the port.

The Limit Control configuration consists of two sections, a system- and a port-wide.

System Configuration

Mode

Indicates if Limit Control is globally enabled or disabled on the switch. If globally disabled, other modules may still use the underlying functionality, but limit checks and corresponding actions are disabled.

Port Security Limit Control Configuration

System Configuration

Mode	Disabled
Aging Enabled	<input type="checkbox"/>
Aging Period	3600 seconds

Port Configuration

Port	Mode	Limit	Action	State	Re-open
*	<>	4	<>		
1	Disabled	4	None	Disabled	Reopen
2	Disabled	4	None	Disabled	Reopen
3	Disabled	4	None	Disabled	Reopen
4	Disabled	4	None	Disabled	Reopen
5	Disabled	4	None	Disabled	Reopen
6	Disabled	4	None	Disabled	Reopen
7	Disabled	4	None	Disabled	Reopen
8	Disabled	4	None	Disabled	Reopen
9	Disabled	4	None	Disabled	Reopen
10	Disabled	4	None	Disabled	Reopen
11	Disabled	4	None	Disabled	Reopen
12	Disabled	4	None	Disabled	Reopen
13	Disabled	4	None	Disabled	Reopen
14	Disabled	4	None	Disabled	Reopen

Aging Enabled

If checked, secured MAC addresses are subject to aging as discussed under Aging Period.

Aging Period

If Aging Period is checked, then the aging period is controlled with this input. If other modules are using the underlying port security for securing MAC addresses, they may have other requirements to the aging period. The underlying port security will use the shorter requested aging period of all modules that use the functionality. The Aging Period can be set to a number between 10 and 10,000,000 seconds. To understand why aging may be desired, consider the following scenario: Suppose an end-host is connected to a 3rd party switch or hub, which in turn is connected to a port on this switch on which Limit Control is enabled. The end-host will be allowed to forward if the limit is not exceeded. Now suppose that the end-host logs off or powers down. If it wasn't for aging, the end-host would still take up resources on this switch and will be allowed to forward. To overcome this situation, enable aging. With aging enabled, a timer is started once the end-host gets secured. When the timer expires, the switch starts looking for frames from the end-host, and if such frames are not seen within the next Aging Period, the end-host is assumed to be disconnected, and the corresponding resources are freed on the switch.

Port Configuration

The table allows you to configure the Port Configuration parameters, which are:

Port

The port number to which the configuration below applies.

Mode

Controls whether Limit Control is enabled on this port. Both this and the Global Mode must be set to Enabled for Limit Control to be in effect. Notice that other modules may still use the underlying port security features without enabling Limit Control on a given port.

Limit

The maximum number of MAC addresses that can be secured on this port. This number cannot exceed 1024. If the limit is exceeded, the corresponding action is taken.

The switch is "born" with a total number of MAC addresses from which all ports draw whenever a new MAC address is seen on a Port Security-enabled port. Since all ports draw from the same pool, it may happen that a configured maximum cannot be granted, if the remaining ports have already used all available MAC addresses.

Action

If Limit is reached, the switch can take one of the following actions:

None: Do not allow more than Limit MAC addresses on the port, but take no further action.

Trap: If Limit+ 1 MAC addresses is seen on the port, send an SNMP trap. If Aging is disabled, only one SNMP trap will be sent, but with Aging enabled, new SNMP traps will be sent every time the limit gets exceeded.

Shutdown: If Limit + 1 MAC addresses is seen on the port, shut down the port. This implies that all secured MAC addresses will be removed from the port, and no new address will be learned. Even if the link is physically disconnected and reconnected on the port (by disconnecting the cable), the port will remain shut down. There are three ways to re-open the port:

- 1) Boot the switch,
- 2) Disable and re-enable Limit Control on the port or the switch,
- 3) Click the Reopen button.

Trap & Shutdown: If Limit + 1 MAC addresses is seen on the port, both the "Trap" and the "Shutdown" actions described above will be taken.

State

This column shows the current state of the port as seen from the Limit Control's point of view. The state takes one of four values:

Disabled: Limit Control is either globally disabled or disabled on the port.

Ready: The limit is not yet reached. This can be shown for all actions.

Limit Reached: Indicates that the limit is reached on this port. This state can only be shown if Action is set to None or Trap.

Shutdown: Indicates that the port is shut down by the Limit Control module. This state can only be shown if Action is set to Shutdown or Trap & Shutdown.

Re-open Button

If a port is shutdown by this module, you may reopen it by clicking this button, which will only be enabled if this is the case. For other methods, refer to Shutdown in the Action section.

Note that clicking the reopen button causes the page to be refreshed, so non-committed changes will be lost.

Buttons

Refresh: Click to refresh the page. Note that non-committed changes will be lost.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Security / Network / Network Access Server Configuration

This page allows you to configure the IEEE802.1X and MAC-based authentication system and port settings.

System Configuration

Mode	Disabled	▼
Reauthentication Enabled	<input type="checkbox"/>	
Reauthentication Period	3600	seconds
EAPOL Timeout	30	seconds
Aging Period	300	seconds
Hold Time	10	seconds
RADIUS-Assigned QoS Enabled	<input type="checkbox"/>	
RADIUS-Assigned VLAN Enabled	<input type="checkbox"/>	
Guest VLAN Enabled	<input type="checkbox"/>	
Guest VLAN ID	1	
Max. Reauth. Count	2	
Allow Guest VLAN if EAPOL Seen	<input type="checkbox"/>	

Port Configuration

Port	Admin State	RADIUS-Assigned QoS Enabled	RADIUS-Assigned VLAN Enabled	Guest VLAN Enabled	Port State	Restart
*	<> ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
1	Force Authorized ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate Reinitialize
2	Force Authorized ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate Reinitialize
3	Force Authorized ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate Reinitialize
4	Force Authorized ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate Reinitialize
5	Force Authorized ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate Reinitialize
6	Force Authorized ▼	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate Reinitialize

The IEEE 802.1X standard defines a port-based access control procedure that prevents unauthorized access to a network by requiring users to first submit credentials for authentication. One or more central servers, the backend servers, determine whether the user is allowed access to the network. These backend (RADIUS) servers are configured on the "Configuration→Security→AAA" page. The IEEE802.1X standard defines port-based operation, but non-standard variants overcome security limitations as shall be explored below.

MAC-based authentication allows for authentication of more than one user on the same port, and doesn't require the user to have special 802.1X supplicant software installed on his system. The switch uses the user's MAC address to authenticate against the backend server. Intruders can create counterfeit MAC addresses, which makes MAC-based authentication less secure than 802.1X authentication. The NAS configuration consists of two sections, a system- and a port-wide.

System Configuration

Mode

Indicates if NAS is globally enabled or disabled on the switch. If globally disabled, all ports are allowed forwarding of frames.

Reauthentication Enabled

If checked, successfully authenticated supplicants/clients are reauthenticated after the interval specified by the Reauthentication Period. Reauthentication for 802.1X-enabled ports can be used to detect if a new device is plugged into a switch port or if a supplicant is no longer attached.

For MAC-based ports, reauthentication is only useful if the RADIUS server configuration has changed. It does not involve communication between the switch and the client, and therefore doesn't imply that a client is still present on a port (see Aging Period below).

Reauthentication Period

Determines the period, in seconds, after which a connected client must be reauthenticated. This is only active if the Reauthentication Enabled checkbox is checked. Valid values are in the range 1 to 3600 seconds.

EAPOL Timeout

Determines the time for retransmission of Request Identity EAPOL frames. Valid values are in the range 1 to 65535 seconds. This has no effect for MAC-based ports.

Aging Period

This setting applies to the following modes, i.e. modes using the Port Security functionality to secure MAC addresses:

- Single 802.1X
- Multi 802.1X
- MAC-Based Auth.

When the NAS module uses the Port Security module to secure MAC addresses, the Port Security module needs to check for activity on the MAC address in question at regular intervals and free resources if no activity is seen within a given period of time. This parameter controls exactly this period and can be set to a number between 10 and 1000000 seconds.

If reauthentication is enabled and the port is in an 802.1X-based mode, this is not so critical, since supplicants that are no longer attached to the port will get removed upon the next reauthentication, which will fail. But if reauthentication is not enabled, the only way to free resources is by aging the entries.

For ports in MAC-based Auth. mode, reauthentication doesn't cause direct communication between the switch and the client, so this will not detect whether the client is still attached or not, and the only way to free any resources is to age the entry.

Hold Time

This setting applies to the following modes, i.e. modes using the Port Security functionality to secure MAC addresses:

- Single 802.1X
- Multi 802.1X
- MAC-Based Auth.

If a client is denied access - either because the RADIUS server denies the client access or because the RADIUS server request times out (according to the timeout specified on the "Configuration→Security→AAA" page) - the client is put on hold in the Unauthorized state. The hold timer does not count during an on-going authentication.

In MAC-based Auth. mode, the switch will ignore new frames coming from the client during the hold time.

The Hold Time can be set to a number between 10 and 1000000 seconds.

RADIUS-Assigned QoS Enabled

RADIUS-assigned QoS provides a means to centrally control the traffic class to which traffic coming from a successfully authenticated supplicant is assigned on the switch. The RADIUS server must be configured to transmit special RADIUS attributes to take advantage of this feature (see RADIUS-Assigned QoS Enabled below for a detailed description).

The "RADIUS-Assigned QoS Enabled" checkbox provides a quick way to globally enable/disable RADIUS-server assigned QoS Class functionality. When checked, the individual ports' ditto setting determine whether RADIUS-assigned QoS Class is enabled on that port. When unchecked, RADIUS-server assigned QoS Class is disabled on all ports.

RADIUS-Assigned VLAN Enabled

RADIUS-assigned VLAN provides a means to centrally control the VLAN on which a successfully authenticated supplicant is placed on the switch. Incoming traffic will be classified to and switched on the RADIUS-assigned VLAN. The RADIUS server must be configured to transmit special RADIUS attributes to take advantage of this feature (see RADIUS-Assigned VLAN Enabled below for a detailed description).

The "RADIUS-Assigned VLAN Enabled" checkbox provides a quick way to globally enable/disable RADIUS-server assigned VLAN functionality. When checked, the individual ports' ditto setting determine whether RADIUS-assigned VLAN is enabled on that port. When unchecked, RADIUS-server assigned VLAN is disabled on all ports.

Guest VLAN Enabled

A Guest VLAN is a special VLAN - typically with limited network access - on which 802.1X-unaware clients are placed after a network administrator-defined timeout. The switch follows a set of rules for entering and leaving the Guest VLAN as listed below.

The "Guest VLAN Enabled" checkbox provides a quick way to globally enable/disable Guest VLAN functionality. When checked, the individual ports' ditto setting determines whether the port can be moved into Guest VLAN. When unchecked, the ability to move to the Guest VLAN is disabled on all ports.

Guest VLAN ID

This is the value that a port's Port VLAN ID is set to if a port is moved into the Guest VLAN. It is only changeable if the Guest VLAN option is globally enabled.

Valid values are in the range [1; 4095].

Max. Reauth. Count

The number of times the switch transmits an EAPOL Request Identity frame without response before considering entering the Guest VLAN is adjusted with this setting. The value can only be changed if the Guest VLAN option is globally enabled.

Valid values are in the range [1; 255].

Allow Guest VLAN if EAPOL Seen

The switch remembers if an EAPOL frame has been received on the port for the life-time of the port. Once the switch considers whether to enter the Guest VLAN, it will first check if this option is enabled or disabled. If disabled (unchecked; default), the switch will only enter the Guest VLAN if an EAPOL frame has not been received on the port for the life-time of the port. If enabled (checked), the switch will consider entering the Guest VLAN even if an EAPOL frame has been received on the port for the life-time of the port.

The value can only be changed if the Guest VLAN option is globally enabled.

Port Configuration

The table has number of columns which allows you to configure the port mode based on IEEE 802.1X standard. Select the port and configure the settings.

Port Configuration

Port	Admin State	RADIUS-Assigned QoS Enabled	RADIUS-Assigned VLAN Enabled	Guest VLAN Enabled	Port State	Restart	
*	<>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
1	<>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize
2	Force Authorized	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize
3	Force Unauthorized	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize
4	Port-based 802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize
5	Single 802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize
	Multi 802.1X	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize
	MAC-based Auth.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Globally Disabled	Reauthenticate	Reinitialize

Port

The port number for which the configuration below applies.

Admin State

If NAS is globally enabled, this selection controls the port's authentication mode. The following modes are available:

Force Authorized

In this mode, the switch will send one EAPOL Success frame when the port link comes up, and any client on the port will be allowed network access without authentication.

Force Unauthorized

In this mode, the switch will send one EAPOL Failure frame when the port link comes up, and any client on the port will be disallowed network access.

Port-based 802.1X

In the 802.1X-world, the user is called the supplicant, the switch is the authenticator, and the RADIUS server is the authentication server. The authenticator acts as the man-in-the-middle, forwarding requests and responses between the supplicant and the authentication server. Frames sent between the supplicant and the switch are special 802.1X frames, known as EAPOL (EAP Over LANs) frames.

EAPOL frames encapsulate EAP PDUs (RFC3748). Frames sent between the switch and the RADIUS server are RADIUS packets. RADIUS packets also encapsulate EAP PDUs together with other attributes like the switch's IP address, name, and the supplicant's port number on the switch. EAP is very flexible, in that it allows for different authentication methods, like MD5-CHALLENGE, PEAP, and TLS. The important thing is that the authenticator (the switch) doesn't need to know which authentication method the supplicant and the authentication server are using, or how many information exchange frames are needed for a particular method. The

switch simply encapsulates the EAP part of the frame into the relevant type (EAPOL or RADIUS) and forwards it.

When authentication is complete, the RADIUS server sends a special packet containing a success or failure indication. Besides forwarding this decision to the supplicant, the switch uses it to open up or block traffic on the switch port connected to the supplicant.

Note: Suppose two backend servers are enabled and that the server timeout is configured to X seconds (using the AAA configuration page), and suppose that the first server in the list is currently down (but not considered dead). Now, if the supplicant retransmits EAPOL Start frames at a rate faster than X seconds, then it will never get authenticated, because the switch will cancel on-going backend authentication server requests whenever it receives a new EAPOL Start frame from the supplicant. And since the server hasn't yet failed (because the X seconds haven't expired), the same server will be contacted upon the next backend authentication server request from the switch. This scenario will loop forever. Therefore, the server timeout should be smaller than the supplicant's EAPOL Start frame retransmission rate.

Single 802.1X

In port-based 802.1X authentication, once a supplicant is successfully authenticated on a port, the whole port is opened for network traffic. This allows other clients connected to the port (for instance through a hub) to piggy-back on the successfully authenticated client and get network access even though they really aren't authenticated. To overcome this security breach, use the Single 802.1X variant. Single 802.1X is really not an IEEE standard, but features many of the same characteristics as does port-based 802.1X. In Single 802.1X, at most one supplicant can get authenticated on the port at a time. Normal EAPOL frames are used in the communication between the supplicant and the switch. If more than one supplicant is connected to a port, the one that comes first when the port's link comes up will be the first one considered. If that supplicant doesn't provide valid credentials within a certain amount of time, another supplicant will get a chance. Once a supplicant is successfully authenticated, only that supplicant will be allowed access. This is the most secure of all the supported modes. In this mode, the Port Security module is used to secure a supplicant's MAC address once successfully authenticated.

Multi 802.1X

Multi 802.1X is - like Single 802.1X - not an IEEE standard, but a variant that

features many of the same characteristics. In Multi 802.1X, one or more supplicants can get authenticated on the same port at the same time. Each supplicant is authenticated individually and secured in the MAC table using the Port Security module.

In Multi 802.1X it is not possible to use the multicast BPDU MAC address as destination MAC address for EAPOL frames sent from the switch towards the supplicant, since that would cause all supplicants attached to the port to reply to requests sent from the switch. Instead, the switch uses the supplicant's MAC address, which is obtained from the first EAPOL Start or EAPOL Response Identity frame sent by the supplicant. An exception to this is when no supplicants are attached. In this case, the switch sends EAPOL Request Identity frames using the BPDU multicast MAC address as destination - to wake up any supplicants that might be on the port.

The maximum number of supplicants that can be attached to a port can be limited using the Port Security Limit Control functionality. MAC-based Auth.

Unlike port-based 802.1X, MAC-based authentication is not a standard, but merely a best-practices method adopted by the industry. In MAC-based authentication, users are called clients, and the switch acts as the supplicant on behalf of clients. The initial frame (any kind of frame) sent by a client is snooped by the switch, which in turn uses the client's MAC address as both username and password in the subsequent EAP exchange with the RADIUS server. The 6-byte MAC address is converted to a string on the following form "xx-xx-xx-xx-xx-xx", that is, a dash (-) is used as separator between the lower-cased hexadecimal digits. The switch only supports the MD5-Challenge authentication method, so the RADIUS server must be configured accordingly.

When authentication is complete, the RADIUS server sends a success or failure indication, which in turn causes the switch to open up or block traffic for that particular client, using the Port-Security module. Only then will frames from the client be forwarded on the switch. There are no EAPOL frames involved in this authentication, and therefore, MAC-based Authentication has nothing to do with the 802.1X standard.

The advantage of MAC-based authentication over 802.1X-based authentication is that the clients don't need special supplicant software to authenticate. The disadvantage is that MAC addresses can be spoofed by malicious users -

equipment whose MAC address is a valid RADIUS user can be used by anyone. Also, only the MD5-Challenge method is supported. The maximum number of clients that can be attached to a port can be limited using the Port Security Limit Control functionality.

RADIUS-Assigned QoS Enabled

When RADIUS-Assigned QoS is both globally enabled and enabled (checked) on a given port, the switch reacts to QoS Class information carried in the RADIUS Access-Accept packet transmitted by the RADIUS server when a supplicant is successfully authenticated. If present and valid, traffic received on the supplicant's port will be classified to the given QoS Class. If (re-)authentication fails or the RADIUS Access-Accept packet no longer carries a QoS Class or it's invalid, or the supplicant is otherwise no longer present on the port, the port's QoS Class is immediately reverted to the original QoS Class (which may be changed by the administrator in the meanwhile without affecting the RADIUS-assigned).

This option is only available for single-client modes, i.e.

- **Port-based 802.1X**
- **Single 802.1X0**

RADIUS attributes used in identifying a QoS Class:

The User-Priority-Table attribute defined in RFC4675 forms the basis for identifying the QoS Class in an Access-Accept packet.

Only the first occurrence of the attribute in the packet will be considered, and to be valid, it must follow this rule:

- All 8 octets in the attribute's value must be identical and consist of ASCII characters in the range '0' - '3', which translates into the desired QoS Class in the range [0; 3].

RADIUS-Assigned VLAN Enabled

When RADIUS-Assigned VLAN is both globally enabled and enabled (checked) for a given port, the switch reacts to VLAN ID information carried in the RADIUS Access-Accept packet transmitted by the RADIUS server when a supplicant is successfully authenticated. If present and valid, the port's Port VLAN ID will be changed to this VLAN ID, the port will be set to be a member of that VLAN ID, and the port will be forced into VLAN unaware mode. Once assigned, all traffic arriving on the port will be classified and switched on the RADIUS-assigned VLAN ID.

If (re-)authentication fails or the RADIUS Access-Accept packet no longer carries a VLAN ID or it's invalid, or the supplicant is otherwise no longer present on the port, the port's VLAN ID is immediately reverted to the original VLAN ID (which may be changed by the administrator in the meanwhile without affecting the RADIUS-assigned).

This option is only available for single-client modes, i.e.

- **Port-based 802.1X**
- **Single 802.1X**

For trouble-shooting VLAN assignments, use the "Monitor→VLANs→VLAN Membership and VLAN Port" pages. These pages show which modules have (temporarily) overridden the current Port VLAN configuration.

RADIUS attributes used in identifying a VLAN ID:

RFC2868 and RFC3580 form the basis for the attributes used in identifying a VLAN ID in an Access-Accept packet. The following criteria are used:

- The Tunnel-Medium-Type, Tunnel-Type, and Tunnel-Private-Group-ID attributes must all be present at least once in the Access-Accept packet.
- The switch looks for the first set of these attributes that have the same Tag value and fulfil the following requirements (if Tag == 0 is used, the Tunnel-Private-Group-ID does not need to include a Tag):
 - Value of Tunnel-Medium-Type must be set to "IEEE-802" (ordinal 6).
 - Value of Tunnel-Type must be set to "VLAN" (ordinal 13).
 - Value of Tunnel-Private-Group-ID must be a string of ASCII chars in the range '0' - '9', which is interpreted as a decimal string representing the VLAN ID. Leading '0's are discarded. The final value must be in the range [1; 4095].

Guest VLAN Enabled

When Guest VLAN is both globally enabled and enabled (checked) for a given port, the switch considers moving the port into the Guest VLAN according to the rules outlined below.

This option is only available for EAPOL-based modes, i.e.:

- **Port-based 802.1X**
- **Single 802.1X**
- **Multi 802.1X**

For trouble-shooting VLAN assignments, use the "Monitor→VLANs→VLAN Membership and VLAN Port" pages. These pages show which modules have (temporarily) overridden the current Port VLAN configuration.

Guest VLAN Operation:

When a Guest VLAN enabled port's link comes up, the switch starts transmitting EAPOL Request Identity frames. If the number of transmissions of such frames exceeds Max., Reauth., Count and no EAPOL frames have been received in the meanwhile, the switch considers entering the Guest VLAN. The interval between transmission of EAPOL Request Identity frames is configured with EAPOL Timeout. If

Allow guest VLAN if EAPOL Seen is enabled, the port will now be placed in the Guest VLAN. If disabled, the switch will first check its history to see if an EAPOL frame has previously been received on the port (this history is cleared if the port link goes down or the port's Admin State is changed), and if not, the port will be placed in the Guest VLAN. Otherwise it will not move to the Guest VLAN, but continue transmitting EAPOL Request Identity frames at the rate given by EAPOL Timeout. Once in the Guest VLAN, the port is considered authenticated, and all attached clients on the port are allowed access on this VLAN. The switch will not transmit an EAPOL Success frame when entering the Guest VLAN.

While in the Guest VLAN, the switch monitors the link for EAPOL frames, and if one such frame is received, the switch immediately takes the port out of the Guest VLAN and starts authenticating the supplicant according to the port mode. If an EAPOL frame is received, the port will never be able to go back into the Guest VLAN if the "Allow Guest VLAN if EAPOL Seen" is disabled.

Port State

The current state of the port. It can undertake one of the following values:

Globally Disabled: NAS is globally disabled.

Link Down: NAS is globally enabled, but there is no link on the port.

Authorized: The port is in Force Authorized or a single-supPLICANT mode and the supplicant is authorized.

Unauthorized: The port is in Force Unauthorized or a single-supPLICANT mode and the supplicant is not successfully authorized by the RADIUS server.

X Auth/Y Unauth: The port is in a multi-supPLICANT mode. Currently X clients are authorized and Y are unauthorized.

Restart

Two buttons are available for each row. The buttons are only enabled when authentication is globally enabled and the port's Admin State is in an EAPOL-based or MAC-based mode.

Clicking these buttons will not cause settings changed on the page to take effect.

Reauthenticate: Schedules a reauthentication whenever the quiet-period of the port runs out(EAPOL-based authentication).For MAC-based authentication, reauthentication will be attempted immediately.

The button only has effect for successfully authenticated clients on the port and will not cause the clients to get temporarily unauthorized.

Reinitialize: Forces a reinitialization of the clients on the port and thereby a reauthentication immediately. The clients will transfer to the unauthorized state while the reauthentication is in progress.

Buttons

Refresh: Click to refresh the page.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Security / Network / Access Control List Configuration

Configure the ACL parameters (ACE) of each switch port. These parameters will affect frames received on a port unless the frame matches a specific ACE.

ACL Ports Configuration

Port	Policy ID	Action	Rate Limiter ID	Port Redirect	Logging	Shutdown	State	Counter
*	0	<>	<>	<>	<>	<>	<>	*
1	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
2	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
3	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
4	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
5	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
6	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
7	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
8	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
9	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
10	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
11	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
12	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0
13	0	Permit	Disabled	Disabled	Disabled	Disabled	Enabled	0

The settings relate to the currently selected stack unit, as reflected by the page header.

Port

The logical port for the settings contained in the same row.

Policy ID

Select the policy to apply to this port. The allowed values are 0 through 255. The default value is 0.

Action

Select whether forwarding is permitted ("Permit") or denied ("Deny"). The default value is "Permit".

Rate Limiter ID

Select which rate limiter to apply on this port. The allowed values are Disabled or the values 1 through 16. The default value is "Disabled".

SelectDisabledPort Copy

Select which port frames are copied on. The allowed values are Disabled or a specific port number. The default value is "Disabled".

Mirror

Specify the mirror operation of this port. The allowed values are:

Enabled: Frames received on the port are mirrored.

Disabled: Frames received on the port are not mirrored.

The default value is "Disabled".

Logging

Specify the logging operation of this port. The allowed values are:

Enabled: Frames received on the port are stored in the System Log.

Disabled: Frames received on the port are not logged.

The default value is "Disabled". Please note that the System Log memory size and logging rate is limited.

Shutdown

Specify the port shut down operation of this port. The allowed values are:

Enabled: If a frame is received on the port, the port will be disabled.

Disabled: Port shut down is disabled.

The default value is "Disabled".

Counter

Counts the number of frames that match this ACE.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refresh: Click to refresh the page. Any changes made locally will be undone..

Clear: Click to clear the counter

ACL Rate Limiters Configuration

Configure the rate limiter for the ACL of the switch

ACL Rate Limiter Configuration

Rate Limiter ID	Rate (pps)
*	1
1	1
2	1
3	1
4	1
5	1
6	1
7	1
8	1
9	1
10	1
11	1
12	1
13	1
14	1
15	1
16	1

Rate Limiter ID

The rate limiter ID for the settings contained in the same row.

Rate

The allowed values are: 0-3276700 in pps
Or 0,100,200,300,...,1000000 in kbps.

Unit

Specify the rate unit. The allowed values are:

pps: packets per second.

kbps: Kbits per second.

Buttons

Save: Click to save changes.


Reset: Click to undo any changes made locally and revert to previously saved values.

Access Control List Configuration

This page shows the Access Control List (ACL), which is made up of the ACEs defined on this switch. Each row describes the ACE that is defined. The maximum number of ACEs is 256 on each switch.



Click on the lowest plus sign to add a new ACE to the list. The reserved ACEs used for internal protocol, cannot be edited or deleted, the order sequence cannot be changed and the priority is highest.



Ingress Port

Indicates the ingress port of the ACE. Possible values are:

All: The ACE will match all ingress port.

Port: The ACE will match a specific ingress port.

Policy / Bitmask

Indicates the policy number and bitmask of the ACE.

Frame Type

Indicates the frame type of the ACE. Possible values are:

Any: The ACE will match any frame type.

EType: The ACE will match Ethernet Type frames. Note that an Ethernet Type based ACE will not get matched by IP and ARP frames.

ARP: The ACE will match ARP/RARP frames.

IPv4: The ACE will match all IPv4 frames.

IPv4/ICMP: The ACE will match IPv4 frames with ICMP protocol.

IPv4/UDP: The ACE will match IPv4 frames with UDP protocol.

IPv4/TCP: The ACE will match IPv4 frames with TCP protocol.

IPv4/Other: The ACE will match IPv4 frames, which are not ICMP/UDP/TCP.

IPv6: The ACE will match all IPv6 standard frames.

Action

Indicates the forwarding action of the ACE.

Permit: Frames matching the ACE may be forwarded and learned.

Deny: Frames matching the ACE are dropped.

Rate Limiter

Indicates the rate limiter number of the ACE. The allowed range is 1 to 16. When Disabled is displayed, the rate limiter operation is disabled.

Port Copy

Indicates the port copy operation of the ACE. Frames matching the ACE are copied to the port number. The allowed values are Disabled or a specific port number. When Disabled is displayed, the port copy operation is disabled.

Mirror

Specify the mirror operation of this port. Frames matching the ACE are mirrored to the destination mirror port. The allowed values are:

Enabled: Frames received on the port are mirrored.

Disabled: Frames received on the port are not mirrored.

The default value is "Disabled".

Counter

The counter indicates the number of times the ACE was hit by a frame.

Modification Buttons

You can modify each ACE (Access Control Entry) in the table using the following buttons:

- : Inserts a new ACE before the current row.
- : Edits the ACE row.
- : Moves the ACE up the list.
- : Moves the ACE down the list.
- : Deletes the ACE.
- : The lowest plus sign adds a new entry at the bottom of the ACE listings.

Buttons

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Refresh: Click to refresh the page. Note that non-committed changes will be lost.

Clear: Click to clear the counter

Remove All: Click to remove all ACEs

ACE Configuration

Configure an ACE (Access Control Entry) on this page.

An ACE consists of several parameters. These parameters vary according to the frame type that you select. First select the ingress port for the ACE, and then select the frame type. Different parameter options are displayed depending on the frame type selected.

A frame that hits this ACE matches the configuration that is defined here.

ACE Configuration

Ingress Port	All	▼
Policy Filter	Any	▼
Frame Type	Any	▼

Action	Permit	▼
Rate Limiter	Disabled	▼
Port Redirect	Disabled	▼
Logging	Disabled	▼
Shutdown	Disabled	▼
Counter		0

MAC Parameters

DMAC Filter	Any	▼
-------------	-----	---

VLAN Parameters

VLAN ID Filter	Any	▼
Tag Priority	Any	▼

Ingress Port

Select the ingress port for which this ACE applies.

All: The ACE applies to all port.

Port n: The ACE applies to this port number, where n is the number of the switch port. You can select one port or select multiple ports for the entry.

Policy Filter

Specify the policy number filter for this ACE. The policy ID should be the same when you want apply it to the ACL or Port.

Any: No policy filter is specified. (policy filter status is "don't-care".)

Specific: If you want to filter a specific policy with this ACE, choose this value. Two field for entering an policy value and bitmask appears.

Policy Value

When "Specific" is selected for the policy filter, you can enter a specific policy value. The allowed range is 0 to 255.

Policy Bitmask

When "Specific" is selected for the policy filter, you can enter a specific policy bitmask. The allowed range is 0x0 to 0xff.

Select the switch to which this ACE applies. This parameter is reserved to the Stacking model. If the switch doesn't support stacking, the parameter will not display here.

Any: The ACE applies to any port.

Switch n: The ACE applies to this switch number, where n is the number of the switch.

Frame Type

Select the frame type for this ACE. These frame types are mutually exclusive.

Any: Any frame can match this ACE.

Ethernet Type: Only Ethernet Type frames can match this ACE. The IEEE 802.3 describes the value of Length/Type Field specifications to be greater than or equal to 1536 decimal (equal to 0600 hexadecimal).

ARP: Only ARP frames can match this ACE. Notice the ARP frames won't match the ACE with ethernet type.

IPv4: Only IPv4 frames can match this ACE. Notice the IPv4 frames won't match the ACE with ethernet type.

IPv6: Only IPv6 frames can match this ACE. Notice the IPv6 frames won't match the ACE with ethernet type.

Action

Specify the action to take with a frame that hits this ACE.

Permit: The frame that hits this ACE is granted permission for the ACE operation.

Deny: The frame that hits this ACE is dropped.

Rate Limiter

Specify the rate limiter in number of base units. The allowed range is 1 to 16.

Disabled indicates that the rate limiter operation is disabled.

SelectSelectPort Copy

Frames that hit the ACE are copied to the port number specified here. The allowed range is the same as the switch port number range. Disabled indicates that the port copy operation is disabled.

Mirror

Specify the mirror operation of this port. Frames matching the ACE are mirrored to the destination mirror port. The allowed values are:

Enabled: Frames received on the port are mirrored.

Disabled: Frames received on the port are not mirrored.

The default value is "Disabled".

Logging

Specify the logging operation of the ACE. The allowed values are:

Enabled: Frames matching the ACE are stored in the System Log.

Disabled: Frames matching the ACE are not logged.

Please note that the System Log memory size and logging rate is limited.

Shutdown

Specify the port shut down operation of the ACE. The allowed values are:

Enabled: If a frame matches the ACE, the ingress port will be disabled.

Disabled: Port shut down is disabled for the ACE.

Counter

The counter indicates the number of times the ACE was hit by a frame.

MAC Parameters

SMAC Filter

(Only displayed when the frame type is Ethernet Type or ARP.)

Specify the source MAC filter for this ACE.

Any: No SMAC filter is specified. (SMAC filter status is "don't-care".)

Specific: If you want to filter a specific source MAC address with this ACE, choose this value. A field for entering an SMAC value appears.

SMAC Value

When "Specific" is selected for the SMAC filter, you can enter a specific source MAC address. The legal format is "xx-xx-xx-xx-xx-xx". A frame that hits this ACE matches this SMAC value.

DMAC Filter

Specify the destination MAC filter for this ACE.

Any: No DMAC filter is specified. (DMAC filter status is "don't-care".)

MC: Frame must be multicast.

BC: Frame must be broadcast.

UC: Frame must be unicast.

Specific: If you want to filter a specific destination MAC address with this ACE, choose this value. A field for entering a DMAC value appears.

DMAC Value

When "Specific" is selected for the DMAC filter, you can enter a specific destination MAC address. The legal format is "xx-xx-xx-xx-xx-xx". A frame that hits this ACE matches this DMAC value.

VLAN Parameters

802.1Q Tagged

Specify whether frames can hit the action according to the 802.1Q tagged. The allowed values are:

Any: Any value is allowed ("don't-care").

Enabled: Tagged frame only.

Disabled: Untagged frame only.

The default value is "Any".

VLAN ID Filter

Specify the VLAN ID filter for this ACE.

Any: No VLAN ID filter is specified. (VLAN ID filter status is "don't-care".)

Specific: If you want to filter a specific VLAN ID with this ACE, choose this value. A field for entering a VLAN ID number appears.

VLAN ID

When "Specific" is selected for the VLAN ID filter, you can enter a specific VLAN ID number. The allowed range is 1 to 4095. A frame that hits this ACE matches this VLAN ID value.

Tag Priority

Specify the tag priority for this ACE. A frame that hits this ACE matches this tag priority. The allowed number range is 0 to 7. The value Any means that no tag priority is specified (tag priority is "don't-care".)

ARP Parameters

The ARP parameters can be configured when Frame Type "ARP" is selected.

ARP/RARP

Specify the available ARP/RARP opcode (OP) flag for this ACE.

Any: No ARP/RARP OP flag is specified. (OP is "don't-care".)

ARP: Frame must have ARP/RARP opcode set to ARP.

RARP: Frame must have ARP/RARP opcode set to RARP.

Other: Frame has unknown ARP/RARP Opcode flag.

Request/Reply

Specify the available ARP/RARP opcode (OP) flag for this ACE.

Any: No ARP/RARP OP flag is specified. (OP is "don't-care".)

Request: Frame must have ARP Request or RARP Request OP flag set.

Reply: Frame must have ARP Reply or RARP Reply OP flag.

Sender IP Filter

Specify the sender IP filter for this ACE.

Any: No sender IP filter is specified. (Sender IP filter is "don't-care".)

Host: Sender IP filter is set to Host. Specify the sender IP address in the SIP Address field that appears.

Network: Sender IP filter is set to Network. Specify the sender IP address and sender IP mask in the SIP Address and SIP Mask fields that appear.

Sender IP Address

When "Host" or "Network" is selected for the sender IP filter, you can enter a specific sender IP address in dotted decimal notation.

Sender IP Mask

When "Network" is selected for the sender IP filter, you can enter a specific sender IP mask in dotted decimal notation.

Target IP Filter

Specify the target IP filter for this specific ACE.

Any: No target IP filter is specified. (Target IP filter is "don't-care".)

Host: Target IP filter is set to Host. Specify the target IP address in the Target IP Address field that appears.

Network: Target IP filter is set to Network. Specify the target IP address and target IP mask in the Target IP Address and Target IP Mask fields that appear.

Target IP Address

When "Host" or "Network" is selected for the target IP filter, you can enter a specific target IP address in dotted decimal notation.

Target IP Mask

When "Network" is selected for the target IP filter, you can enter a specific target IP mask in dotted decimal notation.

ARP SMAC Match

Specify whether frames can hit the action according to their sender hardware address field (SHA) settings.

0: ARP frames where SHA is not equal to the SMAC address.

1: ARP frames where SHA is equal to the SMAC address.

Any: Any value is allowed ("don't-care").

RARP DMAC Match

Specify whether frames can hit the action according to their target hardware address field (THA) settings.

0: RARP frames where THA is not equal to the DMAC address.

1: RARP frames where THA is equal to the DMAC address.

Any: Any value is allowed ("don't-care").

IP/Ethernet Length

Specify whether frames can hit the action according to their ARP/RARP hardware address length (HLN) and protocol address length (PLN) settings.

0: ARP/RARP frames where the HLN is not equal to Ethernet (0x06) or the (PLN) is not equal to IPv4 (0x04).

1: ARP/RARP frames where the HLN is equal to Ethernet (0x06) and the (PLN) is equal to IPv4 (0x04).

Any: Any value is allowed ("don't-care").

IP

Specify whether frames can hit the action according to their ARP/RARP hardware address space (HRD) settings.

0: ARP/RARP frames where the HLD is not equal to Ethernet (1).

1: ARP/RARP frames where the HLD is equal to Ethernet (1).

Any: Any value is allowed ("don't-care").

Ethernet

Specify whether frames can hit the action according to their ARP/RARP protocol address space (PRO) settings.

0: ARP/RARP frames where the PRO is not equal to IP (0x800).

1: ARP/RARP frames where the PRO is equal to IP (0x800).

Any: Any value is allowed ("don't-care").

IP Parameters

The IP parameters can be configured when Frame Type "IPv4" is selected.

IP Protocol Filter

Specify the IP protocol filter for this ACE.

Any: No IP protocol filter is specified ("don't-care").

Specific: If you want to filter a specific IP protocol filter with this ACE, choose this value. A field for entering an IP protocol filter appears.

ICMP: Select ICMP to filter IPv4 ICMP protocol frames. Extra fields for defining ICMP parameters will appear. These fields are explained later in this help file.

UDP: Select UDP to filter IPv4 UDP protocol frames. Extra fields for defining UDP parameters will appear. These fields are explained later in this help file.

TCP: Select TCP to filter IPv4 TCP protocol frames. Extra fields for defining TCP parameters will appear. These fields are explained later in this help file.

IP Protocol Value

When "Specific" is selected for the IP protocol value, you can enter a specific value. The allowed range is 0 to 255. A frame that hits this ACE matches this IP protocol value.

IP TTL

Specify the Time-to-Live settings for this ACE.

zero: IPv4 frames with a Time-to-Live field greater than zero must not be able to match this entry.

non-zero: IPv4 frames with a Time-to-Live field greater than zero must be able to match this entry.

Any: Any value is allowed ("don't-care").

IP Fragment

Specify the fragment offset settings for this ACE. This involves the settings for the More Fragments (MF) bit and the Fragment Offset (FRAG OFFSET) field for an IPv4 frame.

No: IPv4 frames where the MF bit is set or the FRAG OFFSET field is greater than zero must not be able to match this entry.

Yes: IPv4 frames where the MF bit is set or the FRAG OFFSET field is greater than zero must be able to match this entry.

Any: Any value is allowed ("don't-care").

IP Option

Specify the options flag setting for this ACE.

No: IPv4 frames where the options flag is set must not be able to match this entry.

Yes: IPv4 frames where the options flag is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

SIP Filter

Specify the source IP filter for this ACE.

Any: No source IP filter is specified. (Source IP filter is "don't-care".)

Host: Source IP filter is set to Host. Specify the source IP address in the SIP Address field that appears.

Network: Source IP filter is set to Network. Specify the source IP address and source IP mask in the SIP Address and SIP Mask fields that appear.

SIP Address

When "Host" or "Network" is selected for the source IP filter, you can enter a specific SIP address in dotted decimal notation.

SIP Mask

When "Network" is selected for the source IP filter, you can enter a specific SIP mask in dotted decimal notation.

DIP Filter

Specify the destination IP filter for this ACE.

Any: No destination IP filter is specified. (Destination IP filter is "don't-care".)

Host: Destination IP filter is set to Host. Specify the destination IP address in the DIP Address field that appears.

Network: Destination IP filter is set to Network. Specify the destination IP address and destination IP mask in the DIP Address and DIP Mask fields that appear.

DIP Address

When "Host" or "Network" is selected for the destination IP filter, you can enter a specific DIP address in dotted decimal notation.

DIP Mask

When "Network" is selected for the destination IP filter, you can enter a specific DIP mask in dotted decimal notation.

ICMP Parameters

ICMP Type Filter

Specify the ICMP filter for this ACE.

Any: No ICMP filter is specified (ICMP filter status is "don't-care").

Specific: If you want to filter a specific ICMP filter with this ACE, you can enter a specific ICMP value. A field for entering an ICMP value appears.

ICMP Type Value

When "Specific" is selected for the ICMP filter, you can enter a specific ICMP value. The allowed range is 0 to 255. A frame that hits this ACE matches this ICMP value.

ICMP Code Filter

Specify the ICMP code filter for this ACE.

Any: No ICMP code filter is specified (ICMP code filter status is "don't-care").

Specific: If you want to filter a specific ICMP code filter with this ACE, you can enter a specific ICMP code value. A field for entering an ICMP code value appears.

ICMP Code Value

When "Specific" is selected for the ICMP code filter, you can enter a specific ICMP code value. The allowed range is 0 to 255. A frame that hits this ACE matches this ICMP code value.

TCP/UDP Parameters

TCP/UDP Source Filter

Specify the TCP/UDP source filter for this ACE.

Any: No TCP/UDP source filter is specified (TCP/UDP source filter status is "don't-care").

Specific: If you want to filter a specific TCP/UDP source filter with this ACE, you can enter a specific TCP/UDP source value. A field for entering a TCP/UDP source value appears.

Range: If you want to filter a specific TCP/UDP source range filter with this ACE, you can enter a specific TCP/UDP source range value. A field for entering a TCP/UDP source value appears.

TCP/UDP Source No.

When "Specific" is selected for the TCP/UDP source filter, you can enter a specific TCP/UDP source value. The allowed range is 0 to 65535. A frame that hits this ACE matches this TCP/UDP source value.

TCP/UDP Source Range

When "Range" is selected for the TCP/UDP source filter, you can enter a specific TCP/UDP source range value. The allowed range is 0 to 65535. A frame that hits this ACE matches this TCP/UDP source value.

TCP/UDP Destination Filter

Specify the TCP/UDP destination filter for this ACE.

Any: No TCP/UDP destination filter is specified (TCP/UDP destination filter status is "don't-care").

Specific: If you want to filter a specific TCP/UDP destination filter with this ACE, you can enter a specific TCP/UDP destination value. A field for entering a TCP/UDP destination value appears.

Range: If you want to filter a specific range TCP/UDP destination filter with this ACE, you can enter a specific TCP/UDP destination range value. A field for entering a TCP/UDP destination value appears.

TCP/UDP Destination Number

When "Specific" is selected for the TCP/UDP destination filter, you can enter a specific TCP/UDP destination value. The allowed range is 0 to 65535. A frame that hits this ACE matches this TCP/UDP destination value.

TCP/UDP Destination Range

When "Range" is selected for the TCP/UDP destination filter, you can enter a specific TCP/UDP destination range value. The allowed range is 0 to 65535. A frame that hits this ACE matches this TCP/UDP destination value.

TCP FIN

Specify the TCP "No more data from sender" (FIN) value for this ACE.

0: TCP frames where the FIN field is set must not be able to match this entry.

1: TCP frames where the FIN field is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

TCP SYN

Specify the TCP "Synchronize sequence numbers" (SYN) value for this ACE.

0: TCP frames where the SYN field is set must not be able to match this entry.

1: TCP frames where the SYN field is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

TCP RST

Specify the TCP "Reset the connection" (RST) value for this ACE.

0: TCP frames where the RST field is set must not be able to match this entry.

1: TCP frames where the RST field is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

TCP PSH

Specify the TCP "Push Function" (PSH) value for this ACE.

0: TCP frames where the PSH field is set must not be able to match this entry.

1: TCP frames where the PSH field is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

TCP ACK

Specify the TCP "Acknowledgment field significant" (ACK) value for this ACE.

0: TCP frames where the ACK field is set must not be able to match this entry.

1: TCP frames where the ACK field is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

TCP URG

Specify the TCP "Urgent Pointer field significant" (URG) value for this ACE.

0: TCP frames where the URG field is set must not be able to match this entry.

1: TCP frames where the URG field is set must be able to match this entry.

Any: Any value is allowed ("don't-care").

Switch / Network / DHCP Configuration

DHCP Snooping Configuration

Configure DHCP Snooping on this page.

Snooping Mode

Indicates the DHCP snooping mode operation. Possible modes are:

Enabled: Enable DHCP snooping mode operation. When DHCP snooping mode operation is enabled, the DHCP request messages will be forwarded to trusted ports and only allow reply packets from trusted ports.

Disabled: Disable DHCP snooping mode operation.

Port Mode

Indicates the DHCP snooping port mode. Possible port modes are:

Trusted: Configures the port as trusted source of the DHCP messages.

Untrusted: Configures the port as untrusted source of the DHCP messages.

DHCP Snooping Configuration

Snooping Mode	Disabled ▾
---------------	------------

Port Mode Configuration

Port	Mode
*	<> ▾
1	Trusted ▾
2	Trusted ▾
3	Trusted ▾
4	Trusted ▾
5	Trusted ▾
6	Trusted ▾
7	Trusted ▾
8	Trusted ▾
9	Trusted ▾

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

DHCP Relay Configuration

Configure DHCP Relay on this page.

DHCP Relay Configuration

Relay Mode	Disabled
Relay Server	0.0.0.0
Relay Information Mode	Enabled
Relay Information Policy	Replace

Relay Mode

Indicates the DHCP relay mode operation. Possible modes are:

Enabled: Enable DHCP relay mode operation. When DHCP relay mode operation is enabled, the agent forwards and transfers DHCP messages between the clients and the server when they are not in the same subnet domain. And the DHCP broadcast message won't be flooded for security considerations.

Disabled: Disable DHCP relay mode operation.

Relay Server

Indicates the DHCP relay server IP address. A DHCP relay agent is used to forward and to transfer DHCP messages between the clients and the server when they are not in the same subnet domain.

Relay Information Mode

Indicates the DHCP relay information mode option operation. The option 82 circuit ID format as "[vlan_id][module_id][port_no]". The first four characters represent the VLAN ID, the fifth and sixth characters are the module ID(in standalone device it always equal 0, in stackable device it means switch ID).), and the last two characters are the port number. For example, "00030108" means the DHCP message receive form VLAN ID 3, switch ID 1, port No 8. And the option 82 remote ID value is equal the switch MAC address.

Possible modes are:

Enabled: Enable DHCP relay information mode operation. When DHCP relay information mode operation is enabled, the agent inserts specific information (option 82) into a DHCP message when forwarding to DHCP server and removes it from a DHCP message when transferring to DHCP client. It only works when DHCP relay operation mode is enabled.

Disabled: Disable DHCP relay information mode operation.

Relay Information Policy

Indicates the DHCP relay information option policy. When DHCP relay information mode operation is enabled, if agent receives a DHCP message that already contains relay agent information it will enforce the policy. And it only works under DHCP if relay information operation mode is enabled. Possible policies are:

Replace: Replace the original relay information when a DHCP message that already contains it is received.

Keep: Keep the original relay information when a DHCP message that already contains it is received.

Drop: Drop the package when a DHCP message that already contains relay information is received.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

IP Source Guard Configuration

IP Source Guard Configuration

This page provides IP Source Guard related configuration.

IP Source Guard Configuration

Mode

Port Mode Configuration

Port	Mode	Max Dynamic Clients
*	<>	<>
1	Disabled	Unlimited
2	Disabled	Unlimited
3	Disabled	Unlimited
4	Disabled	Unlimited
5	Disabled	Unlimited
6	Disabled	Unlimited
7	Disabled	Unlimited
8	Disabled	Unlimited
9	Disabled	Unlimited
10	Disabled	Unlimited
11	Disabled	Unlimited
12	Disabled	Unlimited
13	Disabled	Unlimited
14	Disabled	Unlimited
15	Disabled	Unlimited

Mode of IP Source Guard Configuration

Enable the Global IP Source Guard or disable the Global IP Source Guard. All configured ACEs will be lost when the mode is enabled.

Port Mode Configuration

Specify IP Source Guard is enabled on which ports. Only when both Global Mode and Port Mode on a given port are enabled, IP Source Guard is enabled on this given port.

Max Dynamic Clients

Specify the maximum number of dynamic clients that can be learned on given port. This value can be 0, 1, 2 or unlimited. If the port mode is enabled and the value of max dynamic client is equal to 0, it means only allow the IP packets forwarding that are matched in static entries on the specific port.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Translate dynamic to static: Click to translate all dynamic entries to static entries.

Static IP Source Guard Table

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

VLAN ID

The vlan id for the settings.

IP Address

Allowed Source IP address.

usedMAC address

Allowed Source MAC address.

Adding new entry

Click to add a new entry to the Static IP Source Gurard table. Specify the Port, VLAN ID, IP address, and IP Mask for the new entry. Click "Save".

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

ARP Inspection

ARP Inspection

This page provides ARP Inspection related configuration.

ARP Inspection Configuration

Mode

Port Mode Configuration

Port	Mode
*	<>
1	Disabled
2	Disabled
3	Disabled
4	Disabled
5	Disabled
6	Disabled
7	Disabled
8	Disabled

Mode of ARP Inspection Configuration

Enable the Global ARP Inspection or disable the Global ARP Inspection.

Port Mode Configuration

Specify ARP Inspection is enabled on which ports. Only when both Global Mode and Port Mode on a given port are enabled, ARP Inspection is enabled on this given port.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Translate dynamic to static: Click to translate all dynamic entries to static entries.

Static ARP Inspection Table

Static ARP Inspection Table

Delete	Port	VLAN ID	MAC Address	IP Address
--------	------	---------	-------------	------------

Add New Entry

Save Reset

Static ARP Inspection Table

Delete	Port	VLAN ID	MAC Address	IP Address
Delete	1 ▾			

Add New Entry

Save Reset

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

VLAN ID

The vlan id for the settings.

MAC Address

Allowed Source MAC address in ARP request packets.

IP Address

Allowed Source IP address in ARP request packets.

Adding new entry

Click to add a new entry to the Static ARP Inspection table. Specify the Port, VLAN ID, MAC address, and IP address for the new entry. Click "Save".

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Security / AAA Authentication Server Configuration

This page allows you to configure the Authentication Servers.

Common Server Configuration

These settings are common for all of the Authentication Servers.

Authentication Server Configuration

Common Server Configuration

Timeout	15	seconds
Dead Time	300	seconds

RADIUS Authentication Server Configuration

#	Enabled	IP Address/Hostname	Port	Secret
1	<input type="checkbox"/>		1812	
2	<input type="checkbox"/>		1812	
3	<input type="checkbox"/>		1812	
4	<input type="checkbox"/>		1812	
5	<input type="checkbox"/>		1812	

RADIUS Accounting Server Configuration

#	Enabled	IP Address/Hostname	Port	Secret
1	<input type="checkbox"/>		1813	
2	<input type="checkbox"/>		1813	
3	<input type="checkbox"/>		1813	
4	<input type="checkbox"/>		1813	
5	<input type="checkbox"/>		1813	

TACACS+ Authentication Server Configuration

#	Enabled	IP Address/Hostname	Port	Secret
1	<input type="checkbox"/>		49	
2	<input type="checkbox"/>		49	
3	<input type="checkbox"/>		49	
4	<input type="checkbox"/>		49	
5	<input type="checkbox"/>		49	

Timeout

The Timeout, which can be set to a number between 3 and 3600 seconds, is the maximum time to wait for a reply from a server. If the server does not reply within this timeframe, we will consider it to be dead and continue with the next enabled server (if any).

RADIUS servers are using the UDP protocol, which is unreliable by design. In order to cope with lost frames, the timeout interval is divided into 3 subintervals of equal length. If a reply is not received within the subinterval, the request is transmitted again. This algorithm causes the RADIUS server to be queried up to 3 times before it is considered to be dead.

Dead Time

The Dead Time, which can be set to a number between 0 and 3600 seconds, is the period during which the switch will not send new requests to a server that has failed to respond to a previous request. This will stop the switch from continually trying to contact a server that it has already determined as dead.

Setting the Dead Time to a value greater than 0 (zero) will enable this feature, but only if more than one server has been configured.

RADIUS Authentication Server Configuration

The table has one row for each RADIUS Authentication Server and a number of columns, which are:

#

The RADIUS Authentication Server number for which the configuration below applies.

Enabled

Enable the RADIUS Authentication Server by checking this box.

IP Address/Hostname

The IP address or hostname of the RADIUS Authentication Server. IP address is expressed in dotted decimal notation.

Port

The UDP port to use on the RADIUS Authentication Server. If the port is set to 0 (zero), the default port (1812) is used on the RADIUS Authentication Server.

Secret

The secret - up to 29 characters long - shared between the RADIUS Authentication Server and the switch.

RADIUS Accounting Server Configuration

The table has one row for each RADIUS Accounting Server and a number of columns, which are:

#

The RADIUS Accounting Server number for which the configuration below applies.

Enabled

Enable the RADIUS Accounting Server by checking this box.

IP Address/Hostname

The IP address or hostname of the RADIUS Accounting Server. IP address is expressed in dotted decimal notation.

Port

The UDP port to use on the RADIUS Accounting Server. If the port is set to 0 (zero), the default port (1813) is used on the RADIUS Accounting Server.

Secret

The secret - up to 29 characters long - shared between the RADIUS Accounting Server and the switch.

TACACS+ Authentication Server Configuration

The table has one row for each TACACS+ Authentication Server and a number of columns, which are:

#

The TACACS+ Authentication Server number for which the configuration below applies.

Enabled

Enable the TACACS+ Authentication Server by checking this box.

IP Address/Hostname

The IP address or hostname of the TACACS+ Authentication Server. IP address is expressed in dotted decimal notation.

Port

The TCP port to use on the TACACS+ Authentication Server. If the port is set to 0 (zero), the default port (49) is used on the TACACS+ Authentication Server.

Secret

The secret - up to 29 characters long - shared between the TACACS+ Authentication Server and the switch.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

TCP/UDP Port Number

The TCP/UDP port number can be used to calculate the destination port for the frame. Check to enable the use of the TCP/UDP Port Number, or uncheck to disable. By default, TCP/UDP Port Number is enabled.

Aggregation Group Configuration

Group ID

Indicates the group ID for the settings contained in the same row. Group ID "Normal" indicates there is no aggregation. Only one group ID is valid per port.

Port Members

Each switch port is listed for each group ID. Select a radio button to include a port in an aggregation, or clear the radio button to remove the port from the aggregation. By default, no ports belong to any aggregation group. Only full duplex ports can join an aggregation and ports must be in the same speed in each group.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

LACP - Dynamic Aggregation

This page allows the user to inspect the current LACP port configurations, and possibly change them as well.

LACP Port Configuration for Switch 1

Port	LACP Enabled	Key	Role	Timeout	Prio
*	<input type="checkbox"/>	<>	<>	<>	32768
1	<input type="checkbox"/>	Auto	Active	Fast	32768
2	<input type="checkbox"/>	Auto	Active	Fast	32768
3	<input type="checkbox"/>	Auto	Active	Fast	32768
4	<input type="checkbox"/>	Auto	Active	Fast	32768
5	<input type="checkbox"/>	Auto	Active	Fast	32768
6	<input type="checkbox"/>	Auto	Active	Fast	32768
7	<input type="checkbox"/>	Auto	Active	Fast	32768
8	<input type="checkbox"/>	Auto	Active	Fast	32768
9	<input type="checkbox"/>	Auto	Active	Fast	32768
10	<input type="checkbox"/>	Auto	Active	Fast	32768
11	<input type="checkbox"/>	Auto	Active	Fast	32768
12	<input type="checkbox"/>	Auto	Active	Fast	32768
13	<input type="checkbox"/>	Auto	Active	Fast	32768
14	<input type="checkbox"/>	Auto	Active	Fast	32768
15	<input type="checkbox"/>	Auto	Active	Fast	32768
16	<input type="checkbox"/>	Auto	Active	Fast	32768
17	<input type="checkbox"/>	Auto	Active	Fast	32768
18	<input type="checkbox"/>	Auto	Active	Fast	32768
19	<input type="checkbox"/>	Auto	Active	Fast	32768
20	<input type="checkbox"/>	Auto	Active	Fast	32768
21	<input type="checkbox"/>	Auto	Active	Fast	32768
22	<input type="checkbox"/>	Auto	Active	Fast	32768
23	<input type="checkbox"/>	Auto	Active	Fast	32768
24	<input type="checkbox"/>	Auto	Active	Fast	32768

Port

The switch port number.

LACP Enabled

Controls whether LACP is enabled on this switch port. LACP will form an aggregation when 2 or more ports are connected to the same partner. LACP can form max 12 LLAGs per switch and 2 GLAGs per stack.

Key

The Key value incurred by the port, range 1-65535 . The Autosetting will set the key as appropriate by the physical link speed, 10Mb = 1, 100Mb = 2, 1Gb = 3. Using the Specific setting, a user-defined value can be entered. Ports with the same Key value can participate in the same aggregation group, while ports with different keys cannot.

Role

The Role shows the LACP activity status. The Active will transmit LACP packets each second, while Passive will wait for a LACP packet from a partner (speak if spoken to).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Loop Protection

This page allows the user to inspect the current Loop Protection configurations, and possibly change them as well. The loop protection feature is very important to protect the unexpected network loop, especially when you install the switch on the internet. The incorrect installation, failure media, or hacker attacking may create network loop.

The switch supports the Loop Protection feature, the port can be shutdown or log information per your configuration when the switch do detect the network loop. After the port is shutdown, it may hard to manually reconnect it, so that there is a shutdown time timeout design can help re-enable the port link automatically. With the Loop Protection feature, it can help you to avoid the failure and protect your network.

General Settings

Global Configuration		
Enable Loop Protection	Disable <input type="button" value="v"/>	
Transmission Time	5	seconds
Shutdown Time	180	seconds

Enable Loop Protection

Controls whether loop protections is enabled (as a whole).

Transmission Time

The interval between each loop protection PDU sent on each port. valid values are 1 to 10 seconds.

Shutdown Time

The period (in seconds) for which a port will be kept disabled in the event of a loop is detected (and the port action shuts down the port). Valid values are 0 to 604800 seconds (7 days). A value of zero will keep a port disabled (until next device restart).

Port Configuration

Port

The switch port number of the port.

Enable

Controls whether loop protection is enabled on this switch port.

Action

Configures the action performed when a loop is detected on a port. The valid values are:

Shutdown Port: Shutdown the port until the Shutdown Time timeout.

Shutdown Port and Log: Shutdown the port and log the status.

Log Only: Only log the status.

Tx Mode

Controls whether the port is actively generating loop protection PDU's, or whether it is just passively looking for looped PDU's.

Button

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Spanning Tree

The switch supports Multiple Spanning Tree Protocol (MSTP), Rapid Spanning Tree Protocol (RSTP) and Legacy Spanning Tree Protocol (STP).

The STP and RSTP is combined and defined in IEEE 802.1D-2004, Rapid Spanning Tree Protocol. The RSTP protocol is applied to single network domain no matter how many VLANs in your network. In RSTP domain, one of the switch acts as the Root Switch and block one of the link with highest path cost to avoid network loop. There are maximum 23 level switches within one RSTP domain, the network size may be limited.

Multiple Spanning Tree Protocol (MSTP) is a direct extension of RSTP. It can provide an independent spanning tree for different VLANs. With the Spanning Tree and VLAN mapping, each VLAN has its own root and blocking path, the STP region size becomes lower, the convergence time of topology change becomes faster as well.

There are some important abbreviations as below.

Common Spanning Tree (CST): Common Spanning Tree (CST) interconnects all adjacent MST regions and acts as a virtual bridge node for communications with STP or RSTP nodes in the global network.

Common and Internal Spanning Tree (CIST): MSTP connects all bridges and LAN segments with a single Common and Internal Spanning Tree (CIST). The CIST is formed as a result of the running spanning tree algorithm between switches that support the STP, RSTP, MSTP protocols.

MSTI: Multiple Spanning Tree Instance: One VLAN can be mapped to a MSTI. Each instance has its own root switch, forwarding path, blocking path and table. An MST Region may contain multiple MSTI.

Spanning Tree / Bridge Setting

This page allows you to configure STP system settings. The settings are used by all STP Bridge instances in the Switch.

STP Bridge Configuration

Basic Settings	
Protocol Version	MSTP
Bridge Priority	32768
Forward Delay	15
Max Age	20
Maximum Hop Count	20
Transmit Hold Count	6

Advanced Settings	
Edge Port BPDU Filtering	<input type="checkbox"/>
Edge Port BPDU Guard	<input type="checkbox"/>
Port Error Recovery	<input type="checkbox"/>
Port Error Recovery Timeout	

Basic Settings

Protocol Version

The STP protocol version setting. Valid values are STP, RSTP, and MSTP.

Bridge Priority

Controls the bridge priority. Lower numeric values have better priority. The bridge priority plus the MSTI instance number, concatenated with the 6-byte MAC address of the switch forms a Bridge Identifier.

For MSTP operation, this is the priority of the CIST. Otherwise, this is the priority of the STP/RSTP bridge.

Forward Delay

The delay used by STP Bridges to transit Root and Designated Ports to Forwarding (used in STP compatible mode). Valid values are in the range 4 to 30 seconds.

Max Age

The maximum age of the information transmitted by the Bridge when it is the Root Bridge. Valid values are in the range 6 to 40 seconds, and MaxAge must be $\leq (FwdDelay-1)*2$.

Maximum Hop Count

This defines the initial value of remaining Hops for MSTI information generated at the boundary of an MSTI region. It defines how many bridges a root bridge can distribute its BPDU information to. Valid values are in the range 6 to 40 hops.

Transmit Hold Count

The number of BPDU's a bridge port can send per second. When exceeded, transmission of the next BPDU will be delayed. Valid values are in the range 1 to 10 BPDU's per second.

Advanced Settings

This section describes the advanced settings of the Spanning Tree Protocol.

Edge Port BPDU Filtering

Control whether a port explicitly configured as Edge will transmit and receive BPDUs.

Edge Port BPDU Guard

Control whether a port explicitly configured as Edge will disable itself upon reception of a BPDU. The port will enter the error-disabled state, and will be removed from the active topology.

Port Error Recovery

Control whether a port in the error-disabled state automatically will be enabled after a certain time. If recovery is not enabled, ports have to be disabled and re-enabled for normal STP operation. The condition is also cleared by a system reboot.

Port Error Recovery Timeout

The time to pass before a port in the error-disabled state can be enabled. Valid values are between 30 and 86400 seconds (24 hours).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Spanning Tree / MSTI Mapping

This page allows the user to inspect the current STP MSTI bridge instance priority configurations, and possibly change them as well.

MSTI Configuration

Add VLANs separated by spaces or comma.
Unmapped VLANs are mapped to the CIST. (The default bridge instance).

Configuration Identification

Configuration Name	00-03-ce-08-2c-33
Configuration Revision	0

MSTI Mapping

MSTI	VLANs Mapped
MSTI1	
MSTI2	
MSTI3	
MSTI4	
MSTI5	
MSTI6	
MSTI7	

Configuration Identification

Configuration Name

The name identifying the VLAN to MSTI mapping. Bridges must share the name and revision (see below), as well as the VLAN-to-MSTI mapping configuration in order to share spanning trees for MSTI's (Intra-region). The name is at most 32 characters.

Configuration Revision

The revision of the MSTI configuration named above. This must be an integer between 0 and 65535.

MSTI Mapping

MSTI

The bridge instance. The CIST is not available for explicit mapping, as it will receive the VLANs not explicitly mapped.

VLANs Mapped

The list of VLANs mapped to the MSTI. The VLANs must be separated with comma and/or space. A VLAN can only be mapped to one MSTI. An unused MSTI should just be left empty. (I.e. not having any VLANs mapped to it.)

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Spanning Tree / MSTI Priorities

This page allows the user to inspect the current STP MSTI bridge instance priority configurations, and possibly change them as well.

MSTI Configuration

MSTI Priority Configuration

MSTI	Priority
*	<> ▾
CIST	32768 ▾
MSTI1	32768 ▾
MSTI2	32768 ▾
MSTI3	32768 ▾
MSTI4	32768 ▾
MSTI5	32768 ▾
MSTI6	32768 ▾
MSTI7	32768 ▾

Save Reset

MSTI

The bridge instance. The CIST is the default instance, which is always active

Priority

Controls the bridge priority. Lower numeric values have better priority. The bridge priority plus the MSTI instance number, concatenated with the 6-byte MAC address of the switch forms a Bridge Identifier.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Spanning Tree / CIST Ports

This page allows the user to inspect the current STP CIST port configurations, and possibly change them as well.

This page contains settings for physical and aggregated ports.

STP CIST Port Configuration

CIST Aggregated Port Configuration										
Port	STP Enabled	Path Cost		Priority	Admin Edge	Auto Edge	Restricted Role	TCN	BPDU Guard	Point-to-point
-	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Forced True

CIST Normal Port Configuration for Switch 1										
Port	STP Enabled	Path Cost		Priority	Admin Edge	Auto Edge	Restricted Role	TCN	BPDU Guard	Point-to-point
*	<input checked="" type="checkbox"/>	<>		<>	<>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<>
1	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
2	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
3	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
4	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
5	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
6	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
7	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
8	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
9	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
10	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
11	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
12	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto
13	<input checked="" type="checkbox"/>	Auto		128	Non-Edge	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Auto

The STP port settings relate to the currently selected stack unit, as reflected by the page header.

Port

The switch port number of the logical STP port.

STP Enabled

Controls whether STP is enabled on this switch port.

Path Cost

Controls the path cost incurred by the port.

The Auto setting will set the path cost as appropriate by the physical link speed, using the 802.1D recommended values.

Using the Specific setting, a user-defined value can be entered. The path cost is used when establishing the active topology of the network. Lower path cost ports are chosen as forwarding ports in favour of higher path cost ports. Valid values are in the range 1 to 200000000.

Priority

Controls the port priority. This can be used to control priority of ports having identical port cost. (See above).

operEdge (state flag)

Operational flag describing whether the port is connecting directly to edge devices. (No Bridges attached). Transition to the forwarding state is faster for edge ports (having operEdge true) than for other ports. The value of this flag is based on AdminEdge and AutoEdge fields. This flag is displayed as Edge in Monitor->Spanning Tree -> STP Detailed Bridge Status.

Admin Edge

Controls whether the operEdge flag should start as set or cleared. (The initial operEdge state when a port is initialized).

Auto Edge

Controls whether the bridge should enable automatic edge detection on the bridge port. This allows operEdge to be derived from whether BPDU's are received on the port or not.

Restricted Role

If enabled, causes the port not to be selected as Root Port for the CIST or any MSTI, even if it has the best spanning tree priority vector. Such a port will be selected as an Alternate Port after the Root Port has been selected. If set, it can cause lack of spanning tree connectivity. It can be set by a network administrator to prevent bridges external to a core region of the network influence the spanning tree active topology, possibly because those bridges are not under the full control of the administrator. This feature is also known as Root Guard.

Restricted TCN

If enabled, causes the port not to propagate received topology change notifications and topology changes to other ports. If set it can cause temporary loss of connectivity after changes in a spanning tree's active topology as a result of persistently incorrect learned station location information. It is set by a network administrator to prevent bridges external to a core region of the network, causing address flushing in that region, possibly because those bridges are not under the full control of the administrator or the physical link state of the attached LANs transits frequently.

BPDU Guard

If enabled, causes the port to disable itself upon receiving valid BPDU's. Contrary to the similar bridge setting, the port Edge status does not effect this setting.

A port entering error-disabled state due to this setting is subject to the bridge Port Error Recovery setting as well.

Point2Point

Controls whether the port connects to a point-to-point LAN rather than to a shared medium. This can be automatically determined, or forced either true or false.

Transition to the forwarding state is faster for point-to-point LANs than for shared media.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Spanning Tree MSTI Ports

STP MSTI Port Configuration

This page allows the user to inspect the current STP MSTI port configurations, and possibly change them as well.

MSTI Port Configuration



The screenshot shows a web interface for 'MSTI Port Configuration'. At the top, there is a blue button labeled 'Select MSTI'. Below it is a dropdown menu currently showing 'MST1' with a downward arrow, and a 'Get' button to its right. The entire form is enclosed in a thin blue border.

An MSTI port is a virtual port, which is instantiated separately for each active CIST (physical) port for each MSTI instance configured on and applicable to the port. The MSTI instance must be selected before displaying actual MSTI port configuration options.

This page contains MSTI port settings for physical and aggregated ports.

Apart from the selected MSTI, the STP MSTI port settings also relate to the currently selected stack unit, as reflected by the page header.

Port

The switch port number of the corresponding STP CIST (and MSTI) port.

Path Cost

Controls the path cost incurred by the port. The Autosetting will set the path cost as appropriate by the physical link speed, using the 802.1D recommended values.

Using the Specific setting, a user-defined value can be entered. The path cost is used when establishing the active topology of the network. Lower path cost ports are chosen as forwarding ports in favour of higher path cost ports. Valid values are in the range 1 to 200000000.

Priority

Controls the port priority. This can be used to control priority of ports having identical port cost. (See above).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

MVR (Multicast VLAN Registration)

MVR is short of Multicast VLAN Registration. The MVR is a protocol for layer 2 network that enables multicast traffic from a source VLAN to be shared with client/subscriber VLANs. MVR is typically used for IPTV-like service. In non-MVR environment, the IPTV source to different VLAN would be copied multiple copies based on how many client/subscriber VLANs it would deliver.

The IPTV actually delivers the same source with multiple the same content IP streams, the duplicated traffic occupies the bandwidth of the uplink port. Once the traffic is heavy, some unexpected lost or lag appears. However, after MVR enabled, the client/subscriber VLANs are registered to the same source VLAN, then there is only one source stream will be delivered to the registered VLANs.

This page provides MVR related configurations.

MVR Configurations

MVR Mode Disabled ▾

VLAN Interface Setting for Switch 1 (Role [I:Inactive / S:Source / R:Receiver])

Delete MVR VID MVR Name Mode Tagging Priority LLQI Interface Channel Setting

Add New MVR VLAN

Immediate Leave Setting for Switch 1

Port	Immediate Leave
1	Disabled ▾
2	Disabled ▾
3	Disabled ▾
4	Disabled ▾
5	Disabled ▾
6	Disabled ▾
7	Disabled ▾
8	Disabled ▾
9	Disabled ▾
10	Disabled ▾
11	Disabled ▾

Most of the settings are global, whereas the Router Port configuration is related to the currently selected stack unit, as reflected by the page header.

The MVR feature enables multicast traffic forwarding on the Multicast VLAN. In a multicast television application, a PC or a television with a set-top box can receive the multicast stream. Multiple set-top boxes or PCs can be connected to one subscriber port, which is a switch port configured as an MVR receiver port. When a subscriber selects a channel, the set-top box or PC sends an IGMP join message to Switch A to join the appropriate multicast. Uplink ports that send and receive multicast data to and from the multicast VLAN are called MVR source ports.

MVR Mode

Enable/Disable the Global MVR.

VLAN ID

Specify the Multicast VLAN ID.

Mode

Enable MVR on the port.

Type

Specify the MVR port type on the port.

Immediate Leave

Enable the fast leave on the port.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

IPMC (IP Multicast)

IPMC is short of IP Multicast, the switch support IPv4 and IPv6 multicast forwarding and filtering. The IGMP Snooping defines how to manage IPv4 multicast traffic, the MLD defines how to manage IPv6 multicast traffic.

IGMP Snooping Configuration

Internet Group Management Protocol Snooping (IGMP Snooping) is a multicast constraining mechanism that runs on Layer 2 devices to manage and control multicast groups. By listening to and analyzing IGMP messages, a Layer 2 device running IGMP Snooping establishes mappings between ports and multicast MAC addresses and forwards multicast data based on these mappings.

Basic Configuration

This page provides IGMP Snooping related configuration.

IGMP Snooping Configuration

Global Configuration	
Snooping Enabled	<input type="checkbox"/>
Unregistered IPMCv4 Flooding Enabled	<input checked="" type="checkbox"/>
IGMP SSM Range	232.0.0.0 / 8
Leave Proxy Enabled	<input type="checkbox"/>
Proxy Enabled	<input type="checkbox"/>

Port Related Configuration for Switch 1

Port	Router Port	Fast Leave	Throttling
*	<input type="checkbox"/>	<input type="checkbox"/>	<>
1	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
2	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
3	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
4	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
5	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
6	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
7	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
8	<input type="checkbox"/>	<input type="checkbox"/>	unlimited
9	<input type="checkbox"/>	<input type="checkbox"/>	unlimited

Global Configuration

Snooping Enabled

Enable the Global IGMP Snooping.

Unregistered IPMCv4 Flooding enabled

Enable unregistered IPMCv4 traffic flooding. Unregistered IPMCv4 traffic is so-called unknown multicast. After selected, the unregistered multicast stream will be forwarded like normal packets. Once you un-selected it, such stream will be discarded.

IGMP SSM Range

SSM (Source-Specific Multicast) Range allows the SSM-aware hosts and routers run the SSM service model for the groups in the address range.

Leave Proxy Enabled

Enable IGMP Leave Proxy. This feature can be used to avoid forwarding unnecessary leave messages to the router side.


Proxy Enabled

Enable IGMP Proxy. This feature can be used to avoid forwarding unnecessary join and leave messages to the router side.

Port Related Configuration

Router Port

Specify which ports act as router ports. A router port is a port on the Ethernet switch that leads towards the Layer 3 multicast device or MLD querier. Normally, the router port is the uplink port to the upper L3 Router or IGMP Querier. For example in below figure, the green port of the 2 switches are Router port.

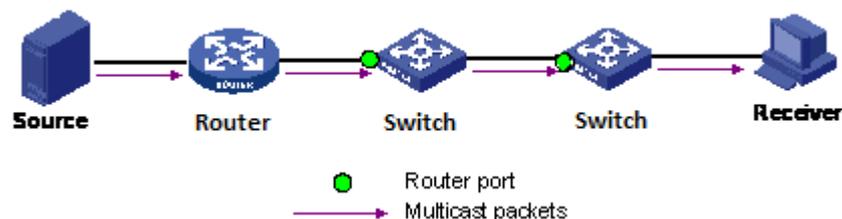

If an aggregation member port is selected as a router port, the whole aggregation will act as a router port.

Fast Leave

Enable the fast leave on the port.

Multicast snooping Fast Leave processing allows the switch to remove an interface from the forwarding-table entry without first sending out group specific queries to the interface. The VLAN interface is pruned from the multicast tree for the multicast group specified in the original leave message. Fast-leave processing ensures optimal bandwidth management for all hosts on a switched network, even when multiple multicast groups are in use simultaneously. This processing applies to IGMP and MLD

Throttling

Enable to limit the number of multicast groups to which a switch port can belong.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

IGMP Snooping VLAN Configuration

Navigating the IGMP Snooping VLAN Table

Each page shows up to 99 entries from the VLAN table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.

The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the next closest VLAN Table match.

The will use the last entry of the currently displayed entry as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

IGMP Snooping VLAN Configuration Refresh | << >>

Start from VLAN with entries per page.

VLAN ID	Snooping Enabled	IGMP Querier	Compatibility	RV	QI (sec)	QRI (0.1 sec)	LLQI (0.1 sec)	URI (sec)
1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	IGMP-Auto	2	125	100	10	1
10	<input type="checkbox"/>	<input type="checkbox"/>	-	-	-	-	-	-
20	<input type="checkbox"/>	<input type="checkbox"/>	-	-	-	-	-	-

IGMP Snooping VLAN Table Columns

VLAN ID

The VLAN ID of the entry.

IGMP Snooping Enabled

Enable the per-VLAN IGMP Snooping. Only up to 64 VLANs can be selected.

IGMP Querier

Enable the IGMP Querier in the VLAN.

Compatibility

Compatibility is maintained by hosts and routers taking appropriate actions depending on the versions of IGMP operating on hosts and routers within a network. The allowed selection is IGMP-Auto, Forced IGMPv1, Forced IGMPv2, Forced IGMPv3, default compatibility value is IGMP-Auto.

RV

Robustness Variable. The Robustness Variable allows tuning for the expected packet loss on a network. The allowed range is 1 to 255, default robustness variable value is 2.

QI

Query Interval. The Query Interval is the interval between General Queries sent by the Querier. The allowed range is 1 to 31744 seconds, default query interval is 125 seconds.

QRI

Query Response Interval. The Max Response Time used to calculate the Max Resp Code inserted into the periodic General Queries. The allowed range is 0 to 31744 in tenths of seconds, default query response interval is 100 in tenths of seconds (10 seconds).

LLQI (LMQI for IGMP)

Last Member Query Interval. The Last Member Query Time is the time value represented by the Last Member Query Interval, multiplied by the Last Member Query Count. The allowed range is 0 to 31744 in tenths of seconds, default last member query interval is 10 in tenths of seconds (1 second).

URI

Unsolicited Report Interval. The Unsolicited Report Interval is the time between repetitions of a host's initial report of membership in a group. The allowed range is 0 to 31744 seconds, default unsolicited report interval is 1 second.

Buttons

Refresh: Refreshes the displayed table starting from the “VLAN” input fields.

<<: Updates the table starting from the first entry in the VLAN Table, i.e. the entry with the lowest VLAN ID.

>>: Update the table, starting with the entry after the last entry currently displayed.

Save: To save the configuration.

Reset: Click to undo any changes made locally and revert to previously saved values.

IGMP Snooping / Port Group Filtering

IGMP Snooping Port Group Filtering Configuration

IGMP Snooping Port Group Filtering Configuration

Delete **Port** **Filtering Groups**

Add New Filtering Group

Save Reset

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

Filtering Groups

The IP Multicast Group that will be filtered.

Adding New Filtering Group

Click to add a new entry to the Group Filtering table. Specify the Port, and Filtering Group of the new entry. Click "Save".

Warning message about the Filtering Group. The range of the IP Multicast is 224.0.0.0 ~239.255.255.255

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

MLD Snooping Configuration

This section provides MLD Snooping related configuration. The MLD is for IPv6 Multicast Snooping. The difference between the 2 IGMP and MLD is that the IGMP is applied to IPv4 Multicast stream, the MLD is applied to IPv6 Multicast stream. While configuring the MLD Snooping configuration, the only thing you need to understand is the IPv6 packet format.

Basic Configuration

This basic configuration of the MLD, IPv6 Multicast Routing.

Most of the settings are global, whereas the Router Port configuration is related to the currently selected stack unit, as reflected by the page header.

Snooping Enabled

Enable the Global MLD Snooping.

Unregistered IPMCv6 Flooding enabled

Enable unregistered IPMCv6 traffic flooding. Please note that disabling unregistered IPMCv6 traffic flooding may lead to failure of Neighbor Discovery.

SSM Range

SSM (Source-Specific Multicast) Range allows the SSM-aware hosts and routers run the SSM service model for the groups in the address range.

Leave Proxy Enabled


Enable MLD Leave Proxy. This feature can be used to avoid forwarding unnecessary leave messages to the router side.

Proxy Enabled

Enable MLD Proxy. This feature can be used to avoid forwarding unnecessary join and leave messages to the router side.

Router Port

Specify which ports act as router ports. A router port is a port on the Ethernet switch that leads towards the Layer 3 multicast device or MLD querier. Normally, the router port is the uplink port to the upper L3 Router or IGMP Querier. For example in below figure, the green port of the 2 switches are Router port.

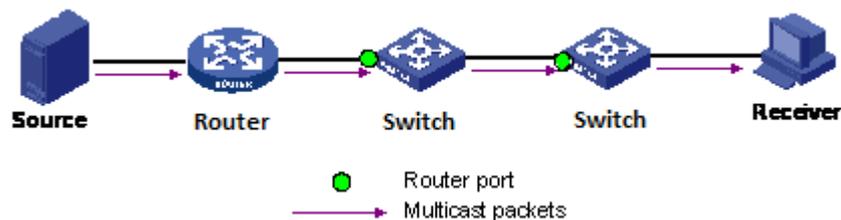

If an aggregation member port is selected as a router port, the whole aggregation will act as a router port.

Fast Leave

Enable the fast leave on the port.

Throttling

Enable to limit the number of multicast groups to which a switch port can belong.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

MLD Snooping VLAN Configuration

Navigating the MLD Snooping VLAN Table

Each page shows up to 99 entries from the VLAN table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.

The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the next closest VLAN Table match.

The will use the last entry of the currently displayed entry as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

MLD Snooping VLAN Table Columns

VLAN ID

The VLAN ID of the entry.

MLD Snooping Enabled

Enable the per-VLAN MLD Snooping. Only up to 64 VLANs can be selected.

MLD Querier

Enable the IGMP Querier in the VLAN.

Compatibility

Compatibility is maintained by hosts and routers taking appropriate actions depending on the versions of MLD operating on hosts and routers within a network. The allowed selection is MLD-Auto, ForcedMLDv1, Forced MLDv2, default compatibility value is MLD-Auto.

RV

Robustness Variable. The Robustness Variable allows tuning for the expected packet loss on a link. The allowed range is 1 to 255, default robustness variable value is 2.

QI

Query Interval. The Query Interval variable denotes the interval between General Queries sent by the Querier. The allowed range is 1 to 31744 seconds, default query interval is 125 seconds.

QRI

Query Response Interval. The Maximum Response Delay used to calculate the Maximum Response Code inserted into the periodic General Queries. The allowed range is 0 to 31744 in tenths of seconds, default query response interval is 100 in tenths of seconds (10 seconds).

LLQI

Last Listener Query Interval. The Last Listener Query Interval is the Maximum Response Delay used to calculate the Maximum Response Code inserted into Multicast Address Specific Queries sent in response to Version 1 Multicast Listener Done messages. It is also the Maximum Response Delay used to calculate the Maximum Response Code inserted into Multicast Address and Source Specific Query messages. The allowed range is 0 to 31744 in tenths of seconds, default last listener query interval is 10 in tenths of seconds (1 second).

URI

Unsolicited Report Interval. The Unsolicited Report Interval is the time between repetitions of a node's initial report of interest in a multicast address. The allowed range is 0 to 31744 seconds, default unsolicited report interval is 1 second.

Buttons

Refresh: Refreshes the displayed table starting from the “VLAN” input fields.

<<: Updates the table starting from the first entry in the VLAN Table, i.e. the entry with the lowest VLAN ID.

>>: Update the table, starting with the entry after the last entry currently displayed.

IPMC / MLD Snooping / Port Group Filtering

MLD Snooping Port Group Filtering Configuration

Delete

Check to delete the entry. It will be deleted during the next save.

Port

The logical port for the settings.

Filtering Groups

The IP Multicast Group that will be filtered.

Adding New Filtering Group

Click to add a new entry to the Group Filtering table. Specify the Port and Filtering Group for the new entry. Click "Save".

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

LLDP Parameters

The Link Layer Discovery Protocol (LLDP) is a vendor-neutral link layer protocol. LLDP information is sent by devices from each of their interfaces at a fixed interval, in the form of an Ethernet Frame. Each frame contains one LLDP Data Unit (LLDPDU). Each LLDPDU is a sequence of Type-Length-Value (TLV) structures. Each LLDP frame starts with the following mandatory TLVs: Chassis ID, Port ID, and Time-to-Live. The mandatory TLVs are followed by any number of optional TLVs.

This section allows the user to inspect and configure the current LLDP port settings.

LLDP Configuration

LLDP Configuration

LLDP Parameters

Tx Interval	30	seconds
Tx Hold	4	times
Tx Delay	2	seconds
Tx Reinit	2	seconds

LLDP Port Configuration for Switch 1

Port	Mode	CDP aware	Optional TLVs				
			Port Descr	Sys Name	Sys Descr	Sys Capa	Mgmt Addr
*	<>	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
1	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
2	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
3	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
4	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
5	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
6	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				
7	Enabled	<input type="checkbox"/>	<input checked="" type="checkbox"/>				

Tx Interval

The switch periodically transmits LLDP frames to its neighbors for having the network discovery information up-to-date. The interval between each LLDP frame is determined by the Tx Interval value. Valid values are restricted to 5 - 32768 seconds.

Tx Hold

Each LLDP frame contains information about how long the information in the LLDP frame shall be considered valid. The LLDP information valid period is set to Tx Hold multiplied by Tx Interval seconds. Valid values are restricted to 2 - 10 times.

Tx Delay

If some configuration is changed (e.g. the IP address) a new LLDP frame is transmitted, but the time between the LLDP frames will always be at least the value of Tx Delay seconds. Tx Delay cannot be larger than 1/4 of the Tx Interval value. Valid values are restricted to 1 - 8192 seconds.

Tx Reinit

When a port is disabled, LLDP is disabled or the switch is rebooted, an LLDP shutdown frame is transmitted to the neighboring units, signalling that the LLDP information isn't valid anymore. Tx Reinit controls the amount of seconds between the shutdown frame and a new LLDP initialization. Valid values are restricted to 1 - 10 seconds.

LLDP Port Configuration

The LLDP port settings relate to the currently selected stack unit, as reflected by the page header.

Port

The switch port number of the logical LLDP port.

Mode

Select LLDP mode.

Rx only The switch will not send out LLDP information, but LLDP information from neighbor units is analyzed.

Tx only The switch will drop LLDP information received from neighbors, but will send out LLDP information.

Disabled The switch will not send out LLDP information, and will drop LLDP information received from neighbors.

Enabled The switch will send out LLDP information, and will analyze LLDP information received from neighbors.

CDP Aware

Select CDP awareness.

The CDP operation is restricted to decoding incoming CDP frames (The switch doesn't transmit CDP frames). CDP frames are only decoded if LLDP on the port is enabled.

Only CDP TLVs that can be mapped to a corresponding field in the LLDP neighbors' table are decoded. All other TLVs are discarded (Unrecognized CDP TLVs and discarded CDP frames are not shown in the LLDP statistics.). CDP TLVs are mapped onto LLDP neighbors' table as shown below.

CDP TLV "Device ID" is mapped to the LLDP "Chassis ID" field.

CDP TLV "Address" is mapped to the LLDP "Management Address" field. The CDP address TLV can contain multiple addresses, but only the first address is shown in the LLDP neighbors table.

CDP TLV "Port ID" is mapped to the LLDP "Port ID" field.

CDP TLV "Version and Platform" is mapped to the LLDP "System Description" field. Both the CDP and LLDP support "system capabilities", but the CDP capabilities cover capabilities that are not part of the LLDP. These capabilities are shown as "others" in the LLDP neighbors' table.

If all ports have CDP awareness disabled the switch forwards CDP frames received from neighbor devices. If at least one port has CDP awareness enabled all CDP frames are terminated by the switch.

Note: When CDP awareness on a port is disabled the CDP information isn't removed immediately, but gets removed when the hold time is exceeded.

Port Descr

Optional TLV: When checked the "port description" is included in LLDP information transmitted.

Sys Name

Optional TLV: When checked the "system name" is included in LLDP information transmitted.

Sys Descr

Optional TLV: When checked the "system description" is included in LLDP information transmitted.

Sys Capa

Optional TLV: When checked the "system capability" is included in LLDP information transmitted.

Mgmt Addr

Optional TLV: When checked the "management address" is included in LLDP information transmitted.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

LLDP Media Configuration

This page allows you to configure the LLDE-MED. This function applies to VoIP devices which support LLDP-MED.

LLDP-MED Configuration

Fast Start Repeat Count

Fast start repeat count

Coordinates Location

Latitude ° North Longitude ° East Altitude Meters Map Datum WGS84

Civic Address Location

Country code		State		County	
City		City district		Block (Neighbourhood)	
Street		Leading street direction		Trailing street suffix	
Street suffix		House no.		House no. suffix	
Landmark		Additional location info		Name	
Zip code		Building		Apartment	
Floor		Room no.		Place type	
Postal community name		P.O. Box		Additional code	

Emergency Call Service

Emergency Call Service

Policies

Delete	Policy ID	Application Type	Tag	VLAN ID	L2 Priority	DSCP
No entries present						

Add New Policy

Save Reset

Fast start repeat count

Fast start repeat count

Rapid startup and Emergency Call Service Location Identification Discovery of endpoints is a critically important aspect of VoIP systems in general. In addition, it is best to advertise only those pieces of information which are specifically relevant to particular endpoint types (for example only advertise the voice network policy to permitted voice-capable devices), both in order to conserve the limited LLDPDU space and to reduce security and system integrity issues that can come with inappropriate knowledge of the network policy.

With this in mind LLDP-MED defines an LLDP-MED Fast Start interaction between the protocol and the application layers on top of the protocol, in order to achieve these related properties. Initially, a Network Connectivity Device will only transmit LLDP TLVs in an LLDPDU. Only after an LLDP-MED Endpoint Device is detected, will an LLDP-MED capable Network Connectivity Device start to advertise LLDP-MED TLVs in outgoing LLDPDUs on the associated port. The LLDP-MED application will temporarily speed up the transmission of the LLDPDU to start within a second, when a new LLDP-MED neighbor has been detected in order share LLDP-MED information as fast as possible to new neighbors.

Because there is a risk of an LLDP frame being lost during transmission between neighbors, it is recommended to repeat the fast start transmission multiple times to

increase the possibility of the neighbors receiving the LLDP frame. With Fast start repeat count it is possible to specify the number of times the fast start transmission would be repeated. The recommended value is 4 times, given that 4 LLDP frames with a 1 second interval will be transmitted, when an LLDP frame with new information is received.

It should be noted that LLDP-MED and the LLDP-MED Fast Start mechanism is only intended to run on links between LLDP-MED Network Connectivity Devices and Endpoint Devices, and as such does not apply to links between LAN infrastructure elements, including Network Connectivity Devices, or other types of links.

Coordinates Location

Latitude

Latitude Should be normalized to within 0-90 degrees with a maximum of 4 digits. It is possible to specify the direction to either North of the equator or south of the equator.

Longitude

Longitude Should be normalized to within 0-180 degrees with a maximum of 4 digits. It is possible to specify the direction the either East of the prime meridian or West of the prime meridian.

Altitude

Altitude SHOULD be normalized to within -32767 to 32767 with a maximum of 4 digits.

It is possible to select between two altitude types (floors or meters).

Meters: Representing meters of Altitude defined by the vertical datum specified.

Floors: Representing altitude in a form more relevant in buildings which have different floor-to-floor dimensions. An altitude = 0.0 is meaningful even outside a building, and represents ground level at the given latitude and longitude. Inside a building, 0.0 represents the floor level associated with ground level at the main entrance.

Map Datum

The Map Datum is used for the coordinates given in these options:

WGS84: (Geographical 3D) - World Geodesic System 1984, CRS Code 4327, Prime Meridian Name: Greenwich.

NAD83/NAVD88: North American Datum 1983, CRS Code 4269, Prime Meridian Name: Greenwich; The associated vertical datum is the North American Vertical

Chapter 3: Featuring Configuration – Web UI

Featuring Configuration – Web UI

Datum of 1988 (NAVD88). This datum pair is to be used when referencing locations on land, not near tidal water (which would use Datum = NAD83/MLLW).

NAD83/MLLW: North American Datum 1983, CRS Code 4269, Prime Meridian Name: Greenwich; The associated vertical datum is Mean Lower Low Water (MLLW). This datum pair is to be used when referencing locations on water/sea/ocean.

Civic Address Location

IETF Geopriv Civic Address based Location Configuration Information (Civic Address LCI).

Country code

The two-letter ISO 3166 Country code in capital ASCII letters – Example: DK, DE, or US.

State

National subdivisions (state, canton, region, province, prefecture).

County

County, parish, gun (Japan), district.

City

City, township, shi (Japan) – Example: Copenhagen.

City district

City division, borough, city district, ward, chou (Japan)

Block (Neighborhood)

Neighborhood block

Street

Street –Example : Poppelvej

Leading Street Direction

Leading street direction – Example: N

Trailing street suffix

Trailing street suffix – Example: SW

Street suffix

Street suffix – Example : Ave, Platz

House no.

House number – Example: 21

House no. suffix

House number suffix – Example: A, 1/2

Landmark

Landmark or vanity address – Example : Columbia University.

Additional location info.

Additional location info – Example : South Wing.

Name

Name (residence and office occupant) – Example : Flemming Jahn.

Zip code

Postal /zip code – Example: 2791

Building

Building (structure) – Example : Low Library.

Apartment

Unit (Apartment, suite) – Example: Apt 42.

Floor

Floor – Example: 4

Room No.

Room number – Example: 450F.

Place type

Place type – Example: Office.

Postal community name

Postal community name – Example: Leonia.

P.O. Box

Post office box (P.O. Box) Example : 12345.

Additional code

Additional code – Example: 1320300003.

Emergency Call Service

Emergency Call Service (e.g. E911 and others), such as defined by TIA or NENA.

Emergency Call Service

Emergency Call Service ELIN identifier data format is defined to carry the ELIN identifier as used during emergency call setup to a traditional CAMA or ISDN trunk-based PSAP. This format consists of a numerical digit string, corresponding to the ELIN to be used for emergency calling.

Chapter 3: Featuring Configuration – Web UI

Featuring Configuration – Web UI

LLDP-MED Configuration

Fast Start Repeat Count

Fast start repeat count

Coordinates Location

Latitude ° North Longitude ° East Altitude Meters Map Datum WGS84

Civic Address Location

Country code	State	County
City	City district	Block (Neighbourhood)
Street	Leading street direction	Trailing street suffix
Street suffix	House no.	House no. suffix
Landmark	Additional location info	Name
Zip code	Building	Apartment
Floor	Room no.	Place type
Postal community name	P.O. Box	Additional code

Emergency Call Service

Emergency Call Service

Policies

Delete	Policy ID	Application Type	Tag	VLAN ID	L2 Priority	DSCP
No entries present						

Policies

Network Policy Discovery enables the efficient discovery and diagnosis of mismatch issues with the VLAN configuration, along with the associated Layer 2 and Layer 3 attributes, which apply for a set of specific protocol applications on that port. Improper network policy configurations are a very significant issue in VoIP environments that frequently result in voice quality degradation or loss of service.

Policies are only intended for use with applications that have specific 'real-time' network policy requirements, such as interactive voice and/or video services.

The network policy attributes advertised are:

1. Layer 2 VLAN ID (IEEE 802.1Q-2003)
2. Layer 2 priority value (IEEE 802.1D-2004)
3. Layer 3 Diffserv code point (DSCP) value (IETF RFC 2474)

This network policy is potentially advertised and associated with multiple sets of application types supported on a given port. The application types specifically addressed are:

This network policy is potentially advertised and associated with multiple sets of application types supported on a given port. The application types specifically addressed are:

1. Voice
2. Guest Voice
3. Soft phone Voice
4. Video Conferencing

5. Streaming Video
6. Control / Signaling (Conditionally support a separate network policy for the media types above)

A large network may support multiple VoIP policies across the entire organization, and different policies per application type. LLDP-MED allows multiple policies to be advertised per port, each corresponding to a different application type. Different ports on the same Network Connectivity Device may advertise different sets of policies, based on the authenticated user identity or port configuration.

It should be noted that LLDP-MED is not intended to run on links other than between Network Connectivity Devices and Endpoints, and therefore does not need to advertise the multitude of network policies that frequently run on an aggregated link interior to the LAN.

Delete

Check to delete the policy. It will be deleted during the next save.

Policy ID

ID for the policy. This is auto generated and shall be used when selecting the policies that shall be mapped to the specific ports.

Application Type

Intended use of the application types:

1. Voice - for use by dedicated IP Telephony handsets and other similar appliances supporting interactive voice services. These devices are typically deployed on a separate VLAN for ease of deployment and enhanced security by isolation from data applications.
2. Voice Signaling (conditional) - for use in network topologies that require a different policy for the voice signaling than for the voice media. This application type should not be advertised if all the same network policies apply as those advertised in the Voice application policy.
3. Guest Voice - support a separate 'limited feature-set' voice service for guest users and visitors with their own IP Telephony handsets and other similar appliances supporting interactive voice services.
4. Guest Voice Signaling (conditional) - for use in network topologies that require a different policy for the guest voice signaling than for the guest voice media. This application type should not be advertised if all the same network policies apply as those advertised in the Guest Voice application policy.

5. Softphone Voice - for use by softphone applications on typical data centric devices, such as PCs or laptops. This class of endpoints frequently does not support multiple VLANs, if at all, and are typically configured to use an 'untagged' VLAN or a single 'tagged' data specific VLAN. When a network policy is defined for use with an 'untagged' VLAN (see Tagged flag below), then the L2 priority field is ignored and only the DSCP value has relevance.

6. Video Conferencing - for use by dedicated Video Conferencing equipment and other similar appliances supporting real-time interactive video/audio services.

7. Streaming Video - for use by broadcast or multicast based video content distribution and other similar applications supporting streaming video services that require specific network policy treatment. Video applications relying on TCP with buffering would not be an intended use of this application type.

8. Video Signalling (conditional) - for use in network topologies that require a separate policy for the video signalling than for the video media. This application type should not be advertised if all the same network policies apply as those advertised in the Video Conferencing application policy

Tag

Tag indicating whether the specified application type is using a 'tagged' or an 'untagged' VLAN.

Untagged indicates that the device is using an untagged frame format and as such does not include a tag header as defined by IEEE 802.1Q-2003. In this case, both the VLAN ID and the Layer 2 priority fields are ignored and only the DSCP value has relevance.

Tagged indicates that the device is using the IEEE 802.1Q tagged frame format, and that both the VLAN ID and the Layer 2 priority values are being used, as well as the DSCP value. The tagged format includes an additional field, known as the tag header. The tagged frame format also includes priority tagged frames as defined by IEEE 802.1Q-2003.

VLAN ID

VLAN identifier (VID) for the port as defined in IEEE 802.1Q-2003.

L2 Priority

L2 Priority is the Layer 2 priority to be used for the specified application type. L2 Priority may specify one of eight priority levels (0 through 7), as defined by IEEE 802.1D-2004. A value of 0 represents use of the default priority as defined in IEEE 802.1D-2004.

DSCP

DSCP value to be used to provide Diffserv node behaviour for the specified application type as defined in IETF RFC 2474. DSCP may contain one of 64 code point values (0 through 63). A value of 0 represents use of the default DSCP value as defined in RFC 2475.

Adding a new policy

Click to add a new policy. Specify the Application type, Tag, VLAN ID, L2 Priority and DSCP for the new policy. Click "Save".

Port Policies Configuration

Every port may advertise a unique set of network policies or different attributes for the same network policies, based on the authenticated user identity or port configuration.

Port

The port number to which the configuration applies.

Policy Id

The set of policies that shall apply to a given port. The set of policies is selected by check marking the checkboxes that corresponds to the policies.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

MAC Address Table Configuration

The MAC Address Table is configured on this page. Set timeouts for entries in the dynamic MAC Table and configure the static MAC table here.

MAC Address Table Configuration

Aging Configuration

Disable Automatic Aging

Aging Time seconds

MAC Table Learning for Switch 1

	Port Members																																																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50						
Auto	<input checked="" type="radio"/>																																																							
Disable	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>																																																			
Secure	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>																																																

Static MAC Table Configuration for Switch 1

	Port Members																																																							
Delete	VLAN ID	MAC Address	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50				
<input type="button" value="Add New Static Entry"/>																																																								

Aging Configuration

By default, dynamic entries are removed from the MAC table after 300 seconds. This removal is also called aging.

Configure aging time by entering a value here in seconds; for example, Age time seconds.

The allowed range is 10 to 1000000 seconds.

Disable the automatic aging of dynamic entries by checking Disable automatic aging.

MAC Table Learning

If the learning mode for a given port is greyed out, another module is in control of the mode, so that it cannot be changed by the user. An example of such a module is the MAC-Based Authentication under 802.1X.

Each port can do learning based upon the following settings:

Auto

Learning is done automatically as soon as a frame with unknown SMAC is received.

Disable

No learning is done.

MAC Address

The MAC address of the entry.

Port Members

Checkmarks indicate which ports are members of the entry. Check or uncheck as needed to modify the entry.

Adding a New Static Entry

Click to add a new entry to the static MAC table. Specify the VLAN ID, MAC address, and port members for the new entry. Click "Save".

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

VLAN Port Configuration

This page is used for configuring the selected stack switch unit port VLAN.

This page is used for configuring the switch port VLAN.

Ethertype for Custom S-ports 0x88A8

Auto-refresh Refresh

VLAN Port Configuration for Switch 1

Port	Port Type	Ingress Filtering	Frame Type	Port VLAN		Tx Tag
				Mode	ID	
*	<>	<input type="checkbox"/>	<>	<>	1	<>
1	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
2	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
3	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
4	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
5	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
6	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
7	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
8	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
9	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
10	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid
11	Unaware	<input type="checkbox"/>	All	Specific	1	Untag_pvid

Ether type for Custom S-ports

This field specifies the ether type used for Custom S-ports. This is a global setting for all the Custom S-ports.

Port

This is the logical port number of this row.

Port Type

Port can be one of the following types: Unaware, Customer port(C-port), Service port(S-port), Custom Service port(S-custom-port)

If Port Type is Unaware, all frames are classified to the Port VLAN ID and tags are not removed.

Ingress Filtering

Enable ingress filtering on a port by checking the box. This parameter affects VLAN ingress processing. If ingress filtering is enabled and the ingress port is not a member of the classified VLAN of the frame, the frame is discarded. By default, ingress filtering is disabled (no checkmark).

Frame Type

Determines whether the port accepts all frames or only tagged/untagged frames. This parameter affects VLAN ingress processing. If the port only accepts tagged frames, untagged frames received on the port are discarded. By default, the field is set to All.

Port VLAN Mode

Configures the Port VLAN Mode. The allowed values are None or Specific This parameter affects VLAN ingress and egress processing.

If None is selected, a VLAN tag with the classified VLAN ID is inserted in frames transmitted on the port. This mode is normally used for ports connected to VLAN aware switches.

If Specific (the default value) is selected, a Port VLAN ID can be configured (see below). Untagged frames received on the port are classified to the Port VLAN ID. If VLAN awareness is disabled, all frames received on the port are classified to the Port VLAN ID. If the classified VLAN ID of a frame transmitted on the port is different from the Port VLAN ID, a VLAN tag with the classified VLAN ID is inserted in the frame.

Port VLAN ID

Configures the VLAN identifier for the port. The allowed values are 1 through 4095. The default value is 1.

Note: The port must be a member of the same VLAN as the Port VLAN ID.

Tx Tag

Determines egress tagging of a port. Untag_pvid - All VLANs except the configured PVID will be tagged. Tag_all - All VLANs are tagged. Untag_all - All VLANs are untagged.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Private VLANs

The Private VLAN feature provides the ability to extend the capabilities of a "standard" VLAN. The additional concepts, Primary VLAN, Community VLAN and Isolated VLAN are introduced in Private VLAN.

The Primary VLAN can be considered the master in the master/slave relationship with the other 2 sub-types, Community VLAN and Isolated VLAN. The switch Ports assigned with the primary VLAN are able to access the ports in the 2 sub-types. Both the Community VLAN and Isolated VLAN can be considered slaves in the master/slave relationship with the primary VLAN. The switch ports assigned to a Community VLAN can see traffic from all other devices in the same Community. The switch ports assigned to an Isolated VLAN can send traffic to the primary VLAN, but CANNOT see traffic from other devices in the same Isolated VLAN.

In this section, the switch allows you to assign Private VLAN Member Configuration and Port Isolation Configuration.

Private VLAN Membership Configuration

The Private VLAN membership configurations for the switch can be monitored and modified here. Private VLANs can be added or deleted here. Port members of each Private VLAN can be added or removed here.

Private VLANs are based on the source port mask, and there are no connections to VLANs. This means that VLAN IDs and Private VLAN IDs can be identical.

A port must be a member of both a VLAN and a Private VLAN to be able to forward packets. By default, all ports are VLAN unaware and members of VLAN 1 and Private VLAN 1.

A VLAN unaware port can only be a member of one VLAN, but it can be a member of multiple Private VLANs.

Delete

To delete a private VLAN entry, check this box. The entry will be deleted during the next save.

Private VLAN ID

Indicates the ID of this particular private VLAN.

Port Members

A row of check boxes for each port is displayed for each private VLAN ID. To include a port in a Private VLAN, check the box. To remove or exclude the port from the Private VLAN, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New Private VLAN

Click to add a new private VLAN ID. An empty row is added to the table, and the private VLAN can be configured as needed. The allowed range for a private VLAN ID is the same as the switch port number range. Any values outside this range are not accepted, and a warning message appears. Click "OK" to discard the incorrect entry, or click "Cancel" to return to the editing and make a correction.

The Private VLAN is enabled when you click "Save".

The button can be used to undo the addition of new Private VLANs.

Buttons


Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Port Isolation Configuration

Overview

This page is used for enabling or disabling port isolation on ports in a Private VLAN..



A port member of a VLAN can be isolated to other isolated ports on the same VLAN and Private VLAN.

The port settings relate to the currently selected stack unit, as reflected by the page header.

This feature works across the stack.

Configuration

Port Members

A check box is provided for each port of a private VLAN. When checked, port isolation is enabled on that port. When unchecked, port isolation is disabled on that port.

By default, port isolation is disabled on all ports.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

VCL

VCL / MAC-Based VLAN Configuration

The MAC-based VLAN entries can be configured here. This page allows for adding and deleting MAC-based VLAN entries and assigning the entries to different ports. This page shows only static entries.

MAC-based VLAN Membership Configuration Auto-refresh Refresh |<< >>

Delete	MAC Address	VLAN ID	Port Members
		1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50	Currently no entries present

Delete

To delete a MAC-based VLAN entry, check this box and press save. The entry will be deleted in the stack.

MAC Address

Indicates the MAC address.

VLAN ID

Indicates the VLAN ID.

Port Members

A row of check boxes for each port is displayed for each MAC-based VLAN entry. To include a port in a MAC-based VLAN, check the box. To remove or exclude the port from the MAC-based VLAN, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New MAC-based VLAN

Click to add a new MAC-based VLAN entry. An empty row is added to the table, and the MAC-based VLAN entry can be configured as needed. Any unicast MAC address can be configured for the MAC-based VLAN entry. No broadcast or multicast MAC addresses are allowed. Legal values for a VLAN ID are 1 through 4095.

The MAC-based VLAN entry is enabled when you click on "Save". A MAC-based VLAN without any port members will be deleted when you click "Save".

The button can be used to undo the addition of new MAC-based VLANs.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refreshes: Refreshes the displayed the table starting from the “VLAN ID” input fields.

<<: Updates the table starting from the first entry in the VLAN Table, i.e. the entry with the lowest VLAN ID.

>>: Update the table, starting with the entry after the last entry currently displayed.

VCL / Protocol-based VLAN

Protocol to Group Mapping Table

This page allows you to add new protocols to Group Name (unique for each Group) mapping entries as well as allow you to see and delete already mapped entries for the switch.

The displayed settings are:

Protocol to Group Mapping Table

Delete	Frame Type	Value	Group Name
No Group entry found!			

Delete

To delete a Protocol to Group Name map entry, check this box. The entry will be deleted on the switch during the next Save.

Frame Type

Frame Type can have one of the following values:

1. Ethernet
2. LLC
3. SNAP

Note: On changing the Frame type field, valid value of the following text field will vary depending on the new frame type you selected.

Value

Valid value that can be entered in this text field depends on the option selected from the the preceding Frame Type selection menu.

Below is the criteria for three different Frame Types:

For Ethernet: Values in the text field when Ethernet is selected as a Frame Type is called etype. Valid values for etype ranges from 0x0600-0xffff

For LLC: Valid value in this case is comprised of two different sub-values.

- a. DSAP: 1-byte long string (0x00-0xff)
- b. SSAP: 1-byte long string (0x00-0xff)

For SNAP: Valid value in this case also is comprised of two different sub-values.

- a. OUI: OUI (Organizationally Unique Identifier) is value in format of xx-xx-xx where each pair (xx) in string is a hexadecimal value ranges from 0x00-0xff.
- b. PID: If the OUI is hexadecimal 000000, the protocol ID is the Ethernet type (EtherType) field value for the protocol running on top of SNAP; if the OUI is an OUI for a particular organization, the protocol ID is a value assigned by that organization to the protocol running on top of SNAP.

In other words, if value of OUI field is 00-00-00 then value of PID will be etype (0x0600-0xffff) and if value of OUI is other than 00-00-00 then valid value of PID will be any value from 0x0000 to 0xffff.

Group Name

A valid Group Name is a unique 16-character long string for every entry which consists of a combination of alphabets (a-z or A-Z) and integers(0-9).

Note: special character and underscore(_) are not allowed.

Adding a New Group to VLAN mapping entry

Click to add a new entry in mapping table. An empty row is added to the table; Frame Type, Value and the Group Name can be configured as needed.

The button can be used to undo the addition of new entry.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

VLC / Protocol-based VLAN / Group Name to VLAN mapping Table

Group Name to VLAN mapping Table Auto-refresh Refresh

Delete	Group Name	VLAN ID	Port Members																																																	
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50

No Group entries

This page allows you to map a already configured Group Name to a VLAN for the switch. The displayed settings are:

Delete

To delete a Group Name to VLAN map entry, check this box. The entry will be deleted on the switch during the next Save

Group Name

A valid Group Name is a string of atmost 16 characters which consists of a combination of alphabets (a-z or A-Z) and integers(0-9), no special character is allowed. whichever Group name you try map to a VLAN must be present in Protocol to Group mapping table and must not be preused by any other existing mapping entry on this page.

VLAN ID

Indicates the ID to which Group Name will be mapped. A valid VLAN ID ranges from 1-4095.

Port Members

A row of check boxes for each port is displayed for each Group Name to VLAN ID mapping. To include a port in a mapping, check the box. To remove or exclude the port from the mapping, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New Group to VLAN mapping entry

Click to add a new entry in mapping table. An empty row is added to the table, the Group Name, VLAN ID and port members can be configured as needed. Legal values for a VLAN ID are 1 through 4095.

The button can be used to undo the addition of new entry.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

VCL / IP Subnet-based VLAN

The IP subnet-based VLAN enties can be configured here. This page allows for adding, updating and deleting IP subnet-based VLAN entries and assigning the entries to different ports. This page shows only static entries.

IP Subnet-based VLAN Membership Configuration Auto-refresh Refresh

Delete	VCE ID	IP Address	Mask Length	VLAN ID	Port Members																																																	
					1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
Currently no entries present																																																						

Delete

To delete a IP subnet-based VLAN entry, check this box and press save. The entry will be deleted in the stack.

VCE ID

Indicates the index of the entry. It is user configurable. It's value ranges from 0-256. If a VCE ID is 0, application will auto-generate the VCE ID for that entry. Deletion and lookup of IP subnet-based VLAN are based on VCE ID.

IP Address

Indicates the IP address.

Mask Length

Indicates the network mask length.

VLAN ID

Indicates the VLAN ID. VLAN ID can be changed for the existing entries.

Port Members

A row of check boxes for each port is displayed for each IP subnet-based VLAN entry. To include a port in a IP subnet-based VLAN, check the box. To remove or exclude the port from the IP subnet-based VLAN, make sure the box is unchecked. By default, no ports are members, and all boxes are unchecked.

Adding a New IP subnet-based VLAN

Click "Add New Entry" to add a new IP subnet-based VLAN entry. An empty row is added to the table, and the IP subnet-based VLAN entry can be configured as needed. Any IP address/mask can be configured for the IP subnet-based VLAN entry. Legal values for a VLAN ID are 1 through 4095.

The IP subnet-based VLAN entry is enabled when you click on "Save". The "Delete" button can be used to undo the addition of new IP subnet-based VLANs.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs every 3 seconds.

Refresh: Refreshes the displayed table.

Voice VLAN Configuration

Voice VLAN / Configuration

The Voice VLAN feature enables voice traffic forwarding on the Voice VLAN, then the switch can classify and schedule network traffic. It is recommended that there be two VLANs on a port - one for voice, one for data. Before connecting the IP device to the switch, the IP phone should configure the voice VLAN ID correctly. It should be configured through its own GUI.

Voice VLAN Configuration

Mode	Disabled	▼
VLAN ID	1000	
Aging Time	86400	seconds
Traffic Class	7 (High)	▼

Port Configuration

Port	Mode	Security	Discovery Protocol
*	<> ▼	<> ▼	<> ▼
1	Disabled ▼	Disabled ▼	OUI ▼
2	Disabled ▼	Disabled ▼	OUI ▼
3	Disabled ▼	Disabled ▼	OUI ▼
4	Disabled ▼	Disabled ▼	OUI ▼
5	Disabled ▼	Disabled ▼	OUI ▼
6	Disabled ▼	Disabled ▼	OUI ▼
7	Disabled ▼	Disabled ▼	OUI ▼
8	Disabled ▼	Disabled ▼	OUI ▼
9	Disabled ▼	Disabled ▼	OUI ▼
10	Disabled ▼	Disabled ▼	OUI ▼
11	Disabled ▼	Disabled ▼	OUI ▼
12	Disabled ▼	Disabled ▼	OUI ▼
13	Disabled ▼	Disabled ▼	OUI ▼
14	Disabled ▼	Disabled ▼	OUI ▼
15	Disabled ▼	Disabled ▼	OUI ▼
16	Disabled ▼	Disabled ▼	OUI ▼
17	Disabled ▼	Disabled ▼	OUI ▼

Mode

Indicates the Voice VLAN mode operation. We must disable MSTP feature before we enable Voice VLAN. It can avoid the conflict of ingress filtering. Possible modes are:

Enabled: Enable Voice VLAN mode operation.

Disabled: Disable Voice VLAN mode operation.

VLAN ID

Indicates the Voice VLAN ID. It should be a unique VLAN ID in the system and cannot equal each port PVID. It is a conflict in configuration if the value equals management VID, MVR VID, PVID etc. The allowed range is 1 to 4095.

Aging Time

Indicates the Voice VLAN secure learning aging time. The allowed range is 10 to 1000000 seconds. It is used when security mode or auto detect mode is enabled. In other cases, it will be based on hardware aging time. The actual aging time will be situated between the [age time; 2 * age time] interval.

Traffic Class

Indicates the Voice VLAN traffic class. All traffic on the Voice VLAN will apply this class.

Port Mode

Indicates the Voice VLAN port mode.

Possible modes are:

Disabled: from Voice VLAN.

Auto: Enable auto detect mode. It detects whether there is VoIP phone attached to the specific port and configures the Voice VLAN members automatically.

Forced: Force join to Voice VLAN.

Port Security

The Voice VLAN port security mode. When the function is enabled, all non-telephonic MAC addresses in the Voice VLAN will be blocked for 10 seconds.

Possible port modes are:

Enabled: Enable Voice VLAN security mode operation.

Disabled: Disable Voice VLAN security mode operation.

Port Discovery Protocol

Indicates the Voice VLAN port discovery protocol. It will only work when auto detect mode is enabled. We should enable LLDP feature before configuring discovery protocol to "LLDP" or "Both". Changing the discovery protocol to "OUI" or "LLDP" will restart auto detect process. Possible discovery protocols are:

OUI: Detect telephony device by OUI address.

LLDP: Detect telephony device by LLDP.

Both: Both OUI and LLDP.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Voice VLAN / OUI Configuration

Configure VOICE VLAN OUI table on this page. The maximum entry number is 16. Modifying the OUI table will restart auto detection of OUI process.

Voice VLAN OUI Table

Delete	Telephony OUI	Description
<input type="checkbox"/>	00-01-e3	Siemens AG phones
<input type="checkbox"/>	00-03-6b	Cisco phones
<input type="checkbox"/>	00-0f-e2	H3C phones
<input type="checkbox"/>	00-60-b9	Philips and NEC AG phones
<input type="checkbox"/>	00-d0-1e	Pingtel phones
<input type="checkbox"/>	00-e0-75	Polycom phones
<input type="checkbox"/>	00-e0-bb	3Com phones

Delete

Check to delete the entry. It will be deleted during the next save.

Telephony OUI

A telephony OUI address is a globally unique identifier assigned to a vendor by IEEE. It must be 6 characters long and the input format is "xx-xx-xx" (x is a hexadecimal digit).

Description

The description of OUI address. Normally, it describes which vendor telephony device it belongs to. The allowed string length is 0 to 32.

Buttons

Add new entry: Click to add a new access management entry.

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Refreshes: Refreshes the displayed the table starting from the "VLAND ID" input fields.

<<: Updates the table starting from the first entry in the VALN Table, i.e. the entry with the lowest VLAND

QoS

QoS / Ingress Port Classification

This page allows you to configure the basic QoS Ingress Classification settings for all switch ports.

The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

QoS Ingress Port Classification for Switch 1

Port	QoS class	DP level	DSCP Based
*	<> ▾	<> ▾	<input type="checkbox"/>
1	0 ▾	0 ▾	<input type="checkbox"/>
2	0 ▾	0 ▾	<input type="checkbox"/>
3	0 ▾	0 ▾	<input type="checkbox"/>
4	0 ▾	0 ▾	<input type="checkbox"/>
5	0 ▾	0 ▾	<input type="checkbox"/>
6	0 ▾	0 ▾	<input type="checkbox"/>
7	0 ▾	0 ▾	<input type="checkbox"/>
8	0 ▾	0 ▾	<input type="checkbox"/>
9	0 ▾	0 ▾	<input type="checkbox"/>
10	0 ▾	0 ▾	<input type="checkbox"/>
11	0 ▾	0 ▾	<input type="checkbox"/>
12	0 ▾	0 ▾	<input type="checkbox"/>
13	0 ▾	0 ▾	<input type="checkbox"/>
14	0 ▾	0 ▾	<input type="checkbox"/>
15	0 ▾	0 ▾	<input type="checkbox"/>
16	0 ▾	0 ▾	<input type="checkbox"/>

Port

The port number for which the configuration below applies.

QoS class

Controls the default QoS class, i.e., the QoS class for frames not classified in any other way. There is a one to one mapping between QoS class, queue and priority. A QoS class of 0 (zero) has the lowest priority.

DP level

Controls the default Drop Precedence Level i.e., the DP level for frames not classified in any other way.

PCP

Controls the default PCP for untagged frames.

DEI

Controls the default DEI for untagged frames.

Tag Class.

Shows the classification mode for tagged frames on this port.

Disabled: Use default QoS class and DP level for tagged frames.

Enabled: Use mapped versions of PCP and DEI for tagged frames.

Click on the mode in order to configure the mode and/or mapping.

DSCP Based

Click to Enable DSCP Based QoS Ingress Port Classification.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

QoS / Ingress Port Policer Config

This page allows you to configure the Policer settings for all switch ports. The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

QoS Ingress Port Classification for Switch 1

Port	QoS class	DP level	DSCP Based
*	<> v	<> v	<input type="checkbox"/>
1	0 v	0 v	<input type="checkbox"/>
2	0 v	0 v	<input type="checkbox"/>
3	0 v	0 v	<input type="checkbox"/>
4	0 v	0 v	<input type="checkbox"/>
5	0 v	0 v	<input type="checkbox"/>
6	0 v	0 v	<input type="checkbox"/>
7	0 v	0 v	<input type="checkbox"/>
8	0 v	0 v	<input type="checkbox"/>
9	0 v	0 v	<input type="checkbox"/>
10	0 v	0 v	<input type="checkbox"/>
11	0 v	0 v	<input type="checkbox"/>
12	0 v	0 v	<input type="checkbox"/>
13	0 v	0 v	<input type="checkbox"/>
14	0 v	0 v	<input type="checkbox"/>
15	0 v	0 v	<input type="checkbox"/>
16	0 v	0 v	<input type="checkbox"/>

Port

The port number for which the configuration below applies.

Enabled

Controls whether the policer is enabled on this switch port.

Rate

Controls the rate for the policer. The default value is 500. This value is restricted to 100-1000000 when the "Unit" is "kbps" or "fps", and it is restricted to 1-3300 when the "Unit" is "Mbps" or "kfps".

Unit

Controls the unit of measure for the policer rate as kbps, Mbps, fps or kfps . The default value is "kbps".

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

QoS / Port Scheduler

This page provides an overview of QoS Egress Port Schedulers for all switch ports. The ports belong to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

QoS Egress Port Schedulers

Port	Mode	Weight					
		Q0	Q1	Q2	Q3	Q4	Q5
1	Strict Priority	-	-	-	-	-	-
2	Strict Priority	-	-	-	-	-	-
3	Strict Priority	-	-	-	-	-	-
4	Strict Priority	-	-	-	-	-	-
5	Strict Priority	-	-	-	-	-	-
6	Strict Priority	-	-	-	-	-	-
7	Strict Priority	-	-	-	-	-	-
8	Strict Priority	-	-	-	-	-	-
9	Strict Priority	-	-	-	-	-	-
10	Strict Priority	-	-	-	-	-	-
11	Strict Priority	-	-	-	-	-	-

Port

The logical port for the settings contained in the same row. Click on the port number in order to configure the schedulers.

Mode

Shows the scheduling mode for this port.

Qn

Shows the weight for this queue and port.

QoS / Egress Port Shapers

This page provides an overview of QoS Egress Port Shapers for all switch ports. The ports belong to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

QoS Egress Port Shapers

Port	Shapers								Port	
	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7		
1	disabled									
2	disabled									
3	disabled									
4	disabled									
5	disabled									
6	disabled									
7	disabled									
8	disabled									
9	disabled									
10	disabled									
11	disabled									
12	disabled									

Port

The logical port for the settings contained in the same row. Click on the port number in order to configure the shapers.

Qn

Shows "disabled" or actual queue shaper rate - e.g. "800 Mbps".

Port

Shows "disabled" or actual port shaper rate - e.g. "800 Mbps".

QoS / Port Tag Remarking

This page provides an overview of QoS Egress Port Tag Remarking for all switch ports.

The ports belong to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

QoS Egress Port Tag Remarking

Port	Mode
1	Classified
2	Classified
3	Classified
4	Classified
5	Classified
6	Classified
7	Classified
8	Classified
9	Classified
10	Classified
11	Classified
12	Classified
13	Classified
14	Classified
15	Classified
16	Classified
17	Classified

Port

The logical port for the settings contained in the same row.

Click on the port number in order to configure tag remarking.

Mode

Shows the tag remarking mode for this port.

Classified: Use classified PCP/DEI values.

Default: Use default PCP/DEI values.

Mapped: Use mapped versions of QoS class and DP level..

QoS / Port DSCP Configuration

This page allows you to configure the basic QoS Port DSCP Configuration settings for all switch ports.

The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

QoS Port DSCP Configuration

Port	Ingress		Egress
	Translate	Classify	Rewrite
*	<input type="checkbox"/>	<>	<>
1	<input type="checkbox"/>	Disable	Disable
2	<input type="checkbox"/>	Disable	Disable
3	<input type="checkbox"/>	Disable	Disable
4	<input type="checkbox"/>	Disable	Disable
5	<input type="checkbox"/>	Disable	Disable
6	<input type="checkbox"/>	Disable	Disable
7	<input type="checkbox"/>	Disable	Disable
8	<input type="checkbox"/>	Disable	Disable
9	<input type="checkbox"/>	Disable	Disable
10	<input type="checkbox"/>	Disable	Disable
11	<input type="checkbox"/>	Disable	Disable
12	<input type="checkbox"/>	Disable	Disable
13	<input type="checkbox"/>	Disable	Disable
14	<input type="checkbox"/>	Disable	Disable
15	<input type="checkbox"/>	Disable	Disable
16	<input type="checkbox"/>	Disable	Disable
17	<input type="checkbox"/>	Disable	Disable
18	<input type="checkbox"/>	Disable	Disable

Port

The Port column shows the list of ports for which you can configure dscp ingress and egress settings.

Ingress

In Ingress settings you can change ingress translation and classification settings for individual ports.

There are two configuration parameters available in Ingress:

1. Translate
2. Classify

1. Translate

To Enable the Ingress Translation click the checkbox.

2. Classify

Classification for a port have 4 different values.

Disabled: No Ingress DSCP Classification.

DSCP=0: Classify if incoming (or translated if enabled) DSCP is 0.

Selected: Classify only selected DSCP for which classification is enabled as specified in DSCP Translation window for the specific DSCP.

All: Classify all DSCP.

Egress

Port Egress Rewriting can be one of -

Disabled: No Egress rewrite.

Enable: Rewrite **enabled** without remapping.

Remap DP Unaware: DSCP from analyzer is remapped and frame is remarked with remapped DSCP value. The remapped DSCP value is always taken from the 'DSCP Translation->Egress Remap DP0' table.

Remap DP Aware: DSCP from **analyzer** is remapped and frame is remarked with remapped DSCP value. Depending on the DP level of the frame, the remapped DSCP value is either taken from the 'DSCP Translation->Egress Remap DP0' table or from the 'DSCP Translation->Egress Remap DP1' table.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

QoS / DSCP based QoS Ingress Classification

This page allows you to configure the basic QoS DSCP based QoS Ingress Classification settings for all switches.

The displayed settings are:

DSCP-Based QoS Ingress Classification

DSCP	Trust	QoS Class	DPL
*	<input type="checkbox"/>	<>	<>
0 (BE)	<input type="checkbox"/>	0	0
1	<input type="checkbox"/>	0	0
2	<input type="checkbox"/>	0	0
3	<input type="checkbox"/>	0	0
4	<input type="checkbox"/>	0	0
5	<input type="checkbox"/>	0	0
6	<input type="checkbox"/>	0	0
7	<input type="checkbox"/>	0	0
8 (CS1)	<input type="checkbox"/>	0	0
9	<input type="checkbox"/>	0	0
10 (AF11)	<input type="checkbox"/>	0	0
11	<input type="checkbox"/>	0	0
12 (AF12)	<input type="checkbox"/>	0	0
13	<input type="checkbox"/>	0	0

DSCP

Maximum number of supported DSCP values are 64.

Trust

Controls whether a specific DSCP value is trusted. Only frames with trusted DSCP values are mapped to a specific QoS class and Drop Precedence Level. Frames with un- trusted DSCP values are treated as a non-IP frame.

QoS Class

QoS class value can be any of (0-7)

DPL

Drop Precedence Level (0-1)

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

QoS / DSCP Translation

This page allows you to configure the basic QoS DSCP Translation settings for all switches. DSCP translation can be done in Ingress or Egress.

The displayed settings are:

DSCP Translation

DSCP	Ingress		Egress
	Translate	Classify	Remap
*	<>	<input type="checkbox"/>	<>
0 (BE)	0 (BE)	<input type="checkbox"/>	0 (BE)
1	1	<input type="checkbox"/>	1
2	2	<input type="checkbox"/>	2
3	3	<input type="checkbox"/>	3
4	4	<input type="checkbox"/>	4
5	5	<input type="checkbox"/>	5
6	6	<input type="checkbox"/>	6
7	7	<input type="checkbox"/>	7
8 (CS1)	8 (CS1)	<input type="checkbox"/>	8 (CS1)
9	9	<input type="checkbox"/>	9
10 (AF11)	10 (AF11)	<input type="checkbox"/>	10 (AF11)
11	11	<input type="checkbox"/>	11
12 (AF12)	12 (AF12)	<input type="checkbox"/>	12 (AF12)
13	13	<input type="checkbox"/>	13
14 (AF13)	14 (AF13)	<input type="checkbox"/>	14 (AF13)

DSCP

Maximum number of supported DSCP values are 64 and valid DSCP value ranges from 0 to 63.

Ingress

Ingress side DSCP can be first translated to new DSCP before using the DSCP for QoS class and DPL map.

There are two configuration parameters for DSCP Translation -

1. Translate
2. Classify

1. Translate

DSCP at Ingress side can be translated to any of (0-63) DSCP values.

2. Classify

Click to enable Classification at Ingress side.

Egress

There are the following configurable parameters for Egress side -

1. Remap DP0 Controls the remapping for frames with DP level 0.
2. Remap DP1 Controls the remapping for frames with DP level 1.

1. Remap DP0

Select the DSCP value from select menu to which you want to remap. DSCP value ranges form 0 to 63.

2. Remap DP1

Select the DSCP value from select menu to which you want to remap. DSCP value ranges form 0 to 63.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

QoS / DSCP Classification

This page allows you to configure the mapping of QoS class and Drop Precedence Level to DSCP value.

The settings relate to the currently selected stack unit, as reflected by the page header.

The displayed settings are:

DSCP Classification

QoS Class	DSCP
*	<>
0	0 (BE)
1	0 (BE)
2	0 (BE)
3	0 (BE)
4	0 (BE)
5	0 (BE)
6	0 (BE)
7	0 (BE)

QoS Class

Actual QoS class.

DPL

Actual Drop Precedence Level.

DSCP

Select the classified DSCP value (0-63).

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

QoS / Control List Configuration

QoS Control List Configuration

This page shows the QoS Control List(QCL), which is made up of the QCEs. Each row describes a QCE that is defined. The maximum number of QCEs is 256 on each switch.

Click on the lowest plus sign to add a new QCE to the list.

QoS Control List Configuration

QCE#	Port	Frame Type	SMAC	DMAC	VID	PCP	DEI	Action		
								Class	DPL	DSCP
+										

QCE#

Indicates the index of QCE.

IndicatesPort

Indicates the list of ports configured with the QCE.

Frame Type

Indicates the type of frame to look for incoming frames. Possible frame types are:

Any: The QCE will match all frame type.

Ethernet: Only Ethernet frames (with Ether Type 0x600-0xFFFF) are allowed.

LLC: Only (LLC) frames are allowed.

SNAP: Only (SNAP) frames are allowed.

IPv4: The QCE will match only IPV4 frames.

IPv6: The QCE will match only IPV6 frames.

SMAC

Displays the OUI field of Source MAC address, i.e. first three octet (byte) of MAC address.

DMAC

Specify the type of Destination MAC addresses for incoming frame. Possible values are:

Any: All types of Destination MAC addresses are allowed.

Unicast: Only Unicast MAC addresses are allowed.

Multicast: Only Multicast MAC addresses are allowed.

Broadcast: Only Broadcast MAC addresses are allowed.

The default value is 'Any'.

VID

Indicates (VLAN ID), either a specific VID or range of VIDs. VID can be in the range 1-4095 or 'Any'

PCP

Priority Code Point: Valid value PCP are specific(0, 1, 2, 3, 4, 5, 6, 7) or range(0-1, 2-3, 4-5, 6-7, 0-3, 4-7) or 'Any'.

DEI

Drop Eligible Indicator: Valid value of DEI can be any of values between 0, 1 or 'Any'.

Conflict

Displays QCE status. It may happen that resources required to add a QCE may not available, in that case it shows conflict status as 'Yes', otherwise it is always 'No'.

Please note that conflict can be resolved by releasing the resource required by the QCE and pressing 'Refresh' button.

QoS Control List Configuration

QCE#	Port	Frame Type	SMAC	DMAC	VID	PCP	DEI	Action			
								Class	DPL	DSCP	

Action

Indicates the classification action taken on ingress frame if parameters configured are matched with the frame's content.

There are three action fields: Class, DPL and DSCP.

Class: Classified QoS class..

DPL: Classified Drop Precedence Level.

DSCP: Classified DSCP value.

Modification Buttons

You can modify each QCE (QoS Control Entry) in the table using the following buttons:

: Inserts a new QCE before the current row.

: Edits the QCE.

: Moves the QCE up the list.

: Moves the QCE down the list.

: Deletes the QCE.

: The lowest plus sign adds a new entry at the bottom of the QCE listings.

Buttons

Refresh: Click to refresh the page. This will help to check the latest conflict status after releasing the resources.

QoS / Storm Control Configuration

Storm control for the switch is configured on this page.

Storm Control Configuration

Frame Type	Enable	Rate (pps)
Unicast	<input type="checkbox"/>	1

There is a unicast storm rate control, multicast storm rate control, and a broadcast storm rate control. These only affect flooded frames, i.e. frames with a (VLAN ID, DMAC) pair not present on the MAC Address table.

The configuration indicates the permitted packet rate for unicast, multicast or broadcast traffic across the switch.

Note: Frames, which are sent to the CPU of the switch are always limited to approximately 4 kpps. For example, broadcasts in the management VLAN are limited to this rate. The management VLAN is configured on the IP setup page.

Frame Type

The settings in a particular row apply to the frame type listed here: Unicast, Multicast or Broadcast.

Enable

Enable or disable the storm control status for the given frame type.

Rate

The rate unit is packets per second (pps). Valid values are: 1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1K, 2K, 4K, 8K, 16K, 32K, 64K, 128K, 256K, 512K, 1024K, 2048K, 4096K, 8192K, 16384K or 32768K.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

Mirroring Configuration

Configure port Mirroring on this page.

To debug network problems, selected traffic can be copied, or mirrored, on a mirror port where a frame analyzer can be attached to analyze the frame flow.

The traffic to be copied on the mirror port is selected as follows:

All frames received on a given port (also known as ingress or source mirroring).

All frames transmitted on a given port (also known as egress or destination mirroring).

Port to mirror on

Port to mirror also known as the mirror port. Frames from ports that have either source (rx) or destination (tx) mirroring enabled are mirrored on this port. Disabled disables mirroring.

Mirror Port Configuration

The following table is used for Rx and Tx enabling.

Mirror Configuration

Port to mirror to

Mirror Port Configuration

Port	Mode
*	<>
1	Disabled
2	Disabled
3	Disabled
4	Disabled
5	Disabled
6	Disabled
7	Disabled
8	Disabled
9	Disabled
10	Disabled

Port

The logical port for the settings contained in the same row.

Mode

Select mirror mode.

Rx only Frames received on this port are mirrored on the mirror port. Frames transmitted are not mirrored.

Tx only Frames transmitted on this port are mirrored on the mirror port. Frames received are not mirrored.

Disabled: Neither frames transmitted nor frames received are mirrored.

Enabled Frames received and frames transmitted are mirrored on the mirror port.

Note: For a given port, a frame is only transmitted once. It is therefore not possible to mirror Tx frames on the mirror port. Because of this, mode for the selected mirror port is limited to Disabled or Rx only.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

UPnP Configuration

Configure UPnP on this page.

UPnP Configuration

Mode	Disabled
TTL	4
Advertising Duration	100

Mode

Indicates the UPnP operation mode. Possible modes are:

Enabled: Enable UPnP mode operation.

Disabled: Disable UPnP mode operation.

When the mode is enabled, two ACEs are added automatically to trap UPnP related packets to CPU. The ACEs are automatically removed when the mode is disabled.

TTL

The TTL value is used by UPnP to send SSDP advertisement messages. Valid values are in the range 1 to 255.

Advertising Duration

The duration, carried in SSDP packets, is used to inform a control point or control points how often it or they should receive an SSDP advertisement message from this switch. If a control point does not receive any message within the duration, it will think that the switch no longer exists. Due to the unreliable nature of UDP, in the standard it is recommended that such refreshing of advertisements to be done at less than one-half of the advertising duration. In the implementation, the switch sends SSDP messages periodically at the interval one-half of the advertising duration minus 30 seconds. Valid values are in the range 100 to 86400.

Buttons

Save: Click to save changes.

Reset: Click to undo any changes made locally and revert to previously saved values.

sFlow Configuration

Sampled Flow (sFlow) is a traffic monitoring technology mainly used to collect and analyze traffic statistics. The switch supports sFlow feature. The sFlow software agent collects traffic statistics and packet information from the sFlow-enabled interfaces on the switch, encapsulates them into sFlow packets. The sFlow agent then sends the packet to a specified sFlow collector, the IP Address you assigned in the switch UI. The sFlow collector analyzes the sFlow packets and displays the result.

sFlow has the following two sampling mechanisms:

- Flow sampling: Packet-based sampling, used to obtain packet content information.
- Counter sampling: Time-based sampling, used to obtain port traffic statistics.

sFlow Configuration

Receiver Configuration

Owner	<none>	Release
IP Address/Hostname	0.0.0.0	
UDP Port	6343	
Timeout	0	seconds
Max. Datagram Size	1400	bytes

Port Configuration

Port	Flow Sampler			Counter Poller	
	Enabled	Sampling Rate	Max. Header	Enabled	Interval
*	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0
1	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0
2	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0
3	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0
4	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0
5	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0
6	<input type="checkbox"/>	0	128	<input type="checkbox"/>	0

Type the IP address of sFlow collector in the Receiver Configuration. The sFlow agent will send the collected information to it.

This next page displays the configured sFlow Samplers on the switch.

sFlow Ports

List of the port numbers on which sFlow is configured.

sFlow Instance

Configured sFlow instance for the port number.

Flow Sampling

Packet flow sampling refers to arbitrarily choosing some packets out of a specified number, reading the first "Max Hdr Size" bytes and exporting the sampled datagram for analysis.

The attributes associated with the flow sampling are: sampler type, sampling rate, maximum header size.

Sampler Type

Configured sampler type on the port and could be any of the types: None, RX, TX, ALL.

Default value is "none".

Sampling Rate

Configured sampling rate on the ports.

Max Hdr Size

Configured size of the header of the sampled frame.

Counter Sampling

Counter sampling performs periodic, time-based sampling or polling of counters associated with an interface enabled for sFlow.

Attribute associated with counter sampling is polling interval.

Polling Interval

Configured polling interval for the counter sampling.

Chapter 4:

Feature Configuration - CLI

In Feature Configuration - CLI:

The Command Line Interface (CLI) is the user interface to the switch's embedded software system. You can view the system information, show the status, configure the switch and receive a response back from the system by keying in a command.

CLI Overview

After login the switch through console CLI, you can see the ">" mark. You can type the command after it. There are some useful command, such as:

Type '<group>' to enter command group, e.g. 'port' to the port configuration.

Type '<group> ?' to get list of group commands, e.g. 'port ?'. You can follow the instruction step by step to finish the command.

Type '<command> ?' to get help on a command, e.g. 'port mode ?'.

Type 'up' to move up one level or '/' to go to root level

Type "logout" in root level to leave the command line interface

Click "Enter" key after finish the command.

Click "Up" key to repeat the previous commands

Commands may be abbreviated, e.g. 'por co' instead of 'port configuration'. For quick configuration, the abbreviated typo is helpful.

Example: Configure the System Contact to Orwell

You can go to system group or type the full name in root level. Both of the methods can meet your need.

In system group mode:

```
System>contact Orwell
```

In root level:

```
>sys contact Orwell
```

Note: This chapter just lists the relevant command lines of the feature settings for your reference. You can see the detail explanation of the commands and features through the chapter 3.

System Configuration

Feature	Command Line
System Information	
System Group	<p>Enter the System Configuration Group to do further configuration.</p> <p>>system</p> <p>Type 'up' to move up one level or '/' to go to root level</p> <p>System></p>
System Contact	<p>Syntax:</p> <p>System Name [<name>]</p> <p>Parameters:</p> <p><name>: System name string. (1-255)</p> <p>Example: Contact Name = Orwell</p> <p>System>contact Orwell</p>
System Name	<p>Syntax:</p> <p>System Name [<name>]</p> <p>Parameters:</p> <p><name>: System name string. (1-255)</p> <p>Example: Contact Name = switch</p> <p>System>name switch</p> <p>switch:/></p> <p><i>(After given system name, the prompt character will be changed automatically.)</i></p>
System Location	<p>Syntax:</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<p>System Location [<location>]</p> <p>Parameters:</p> <p><location>: System location string. (1-255)</p> <p>Example: Location Name</p> <pre>switch:/System>loca fl_01</pre>
Time Zone Offset	<p>Syntax:</p> <p>System Timezone [<offset>]</p> <p>Parameters:</p> <p><offset>: Time zone offset in minutes (-720 to 720) relative to UTC</p> <p>Example: Time Zone = 100</p> <pre>switch:/System>time 100</pre>
IP Configuration	
IP Group	<p>Enter the IP Configuration Group</p> <pre>switch:/>ip</pre> <p>Type 'up' to move up one level or '/' to go to root level</p> <pre>switch:/IP></pre>
DHCP Client	<p>Syntax:</p> <p>IP DHCP [enable disable]</p> <pre>switch:/IP>dhcp en</pre>
IP Setting (Address, Mask, Gateway, Managed VID)	<p>Syntax:</p> <p>IP Setup [<ip_addr>] [<ip_mask>] [<ip_router>] [<vid>]</p> <p>Example: IP=192.168.2.2, Mask=255.255.255.0, Gateway: 192.168.2.254, VID=1</p>

	<pre>switch:/IP>setup 192.168.2.2 255.255.255.0 192.168.2.254 1</pre>
NTP	<p>Enable NTP Mode by below command:</p> <pre>switch:/IP>ntp mode en</pre> <p>Type the NTP Server address settings by below command:</p> <p>Syntax:</p> <pre>IP NTP Server Add <server_index> <ip_addr_string></pre> <pre>IP NTP Server Ipv6 Add <server_index> <server_ipv6></pre> <pre>IP NTP Server Delete <server_index></pre> <p>Example:</p> <pre>switch:/IP>ntp ser add 1 192.168.100.1</pre> <pre>switch:/IP>ntp ser add 2 168.95.1.1</pre> <p>Check the NTP Server settings by below command:</p> <pre>switch:/IP>ntp conf</pre> <p>IP NTP Configuration:</p> <pre>=====</pre> <p>NTP Mode : Enabled</p> <pre>Idx Server IP host address (a.b.c.d) or a host name string --- -----</pre> <pre>1 192.168.100.1 2 168.95.1.1 3 4 5</pre>
DNS Server	Syntax:

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<p>IP DNS [<code><ip_addr></code>]</p> <p>Parameters:</p> <p><code><ip_addr></code>: IP address (a.b.c.d), default: Show IP address</p> <p>Example:</p> <p>switch:/IP>dns 168.95.1.1</p>
DNS Proxy	<p>Syntax: IP DNS_Proxy [enable disable]</p> <p>switch:/IP>dns_proxy en</p>
IPv6 Configuration	
IPv6 Commands	<p>Syntax:</p> <p>IP IPv6 AUTOCONFIG [enable disable]</p> <p>IP IPv6 Setup [<code><ipv6_addr></code>] [<code><ipv6_prefix></code>] [<code><ipv6_router></code>]</p> <p>IP IPv6 State <code><ipv6_addr></code> [enable disable]</p> <p>IP IPv6 Ping6 <code><ipv6_addr></code> [(Length <code><ping_length></code>)] [(Count <code><ping_count></code>)] [(Interval <code><ping_interval></code>)]</p>
Auto Configuration	<p>Syntax:</p> <p>IP IPv6 AUTOCONFIG [enable disable]</p> <p>Example:</p> <p>switch:/IP>ipv6 auto en</p>
IPv6 Address Setting (Address, Prefix, Router)	<p>Syntax:</p> <p>IP IPv6 Setup [<code><ipv6_addr></code>] [<code><ipv6_prefix></code>] [<code><ipv6_router></code>]</p> <p>Example:</p> <p>switch:/IP>ipv6 setup 2001:DB8::250:8bff:fee8:f800 48 2001:DB8::250:8bff:fee8:f8ff</p>
IPv6 Ping Test	<p>Syntax:</p>

	<p>IP IPv6 Ping6 <ipv6_addr> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)]</p> <p>Example:</p> <pre>switch:/IP>ipv6 ping6 2001:DB8::250:8bff:fee8:f800</pre>
NTP	
NTP Mode	<p>Enable NTP Mode by below command:</p> <pre>switch:/IP>ntp mode en</pre>
NTP Server Address Setting	<p>Syntax:</p> <p>Type the NTP Server address settings by below command:</p> <pre>IP NTP Server Add <server_index> <ip_addr_string> IP NTP Server Ipv6 Add <server_index> <server_ipv6> IP NTP Server Delete <server_index></pre> <p>Example:</p> <pre>switch:/IP>ntp ser add 1 192.168.100.1 switch:/IP>ntp ser add 2 168.95.1.1</pre>
NTP Setting Status	<p>Check the NTP Server settings by below command:</p> <pre>switch:/IP>ntp conf</pre> <p>IP NTP Configuration:</p> <pre>=====</pre> <p>NTP Mode : Enabled</p> <pre>Idx Server IP host address (a.b.c.d) or a host name string --- -----</pre> <pre>1 192.168.100.1 2 168.95.1.1 3</pre>

	4 5
System Log	
Server Mode	<p>Syntax:</p> <p>System Log Server Mode [enable disable]</p> <p>Example:</p> <p>switch:/System>log server mode en</p>
Server Address	<p>Syntax:</p> <p>System Log Server Address [<ip_addr_string>]</p> <p>Example:</p> <p>switch:/System>log server add 192.168.2.100</p>
Syslog Level	<p>Syntax:</p> <p>System Log Level [info warning error]</p> <p>Information:</p> <p>switch:/System>log level inf</p> <p>Warning:</p> <p>switch:/System>log level war</p> <p>Error:</p> <p>switch:/System>log level err</p>
Clear Syslog	<p>Syntax:</p> <p>System Log Clear [all info warning error]</p> <p>switch:/System>log clear all</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

System Log Configuration	switch:/System>log conf System Log Configuration: =====
	System Log Server Mode : Enabled
	System Log Server Address : 192.168.2.100
	System Log Level : Error

Power Reduction

Feature	Command Line
LED Power Reduction	
LED Intensity Times	<p>Syntax:</p> <pre>led_power timers [<hour>] [<intensity>]</pre> <p>Parameters:</p> <p><hour> : The hour (0-24) at which to change LEDs intensity <intensity>: The LED intensity in % (0-100)</p> <p>Example: (Time=2:00, Intensity: 30%)</p> <pre>led_power>timer 2 30</pre>
Maintenance	<p>Syntax:</p> <pre>led_power maintenance [<maintenance_time>] [on_at_errors leave_at_errors]</pre> <p>Parameters:</p> <p><maintenance_time> : Time in seconds (0-65535) that the LEDs shall be turned on, when any port changes link state on_at_errors leave_at_errors: on_at_error if LEDs shall be turned on if any errors has been detected. leave_at_errors if no LED change shall happen when errors have been detected</p> <p>Example:</p> <pre>led_power>main 20</pre> <pre>led_power>main 20 on (20 sec., on_ad_errors enabled)</pre>
EEE Configuration	
EEE Port Configuration	<p>Syntax:</p> <pre>EEE Mode [<port_list>] [enable disable]</pre>

	<p>Parameters:</p> <p><port_list>: Port list or 'all', default: All ports</p> <p>enable : Enable EEE</p> <p>disable: Disable EEE</p> <p>Example: Enable Port 1-5</p> <pre>EEE>mode 1-5 en</pre>
Urgent Queue of Port	<p>Syntax:</p> <pre>EEE Urgent_queues [<port_list>] [<queue_list>]</pre> <p>Parameters:</p> <p><port_list> : Port list or 'all', default: All ports</p> <p><queue_list>: List of queues to configure as urgent queues (1-8 or none)</p> <p>Example: Enable Urgent_Queue on Port 1-5</p> <pre>EEE>urge 1-5 2</pre>

Port Configuration

Feature	Command Line
Port Configuration	
Port Group	switch:/>port Type 'up' to move up one level or '/' to go to root level switch:/Port>
Link State	Syntax: Port State [<port_list>] [enable disable] Example: Enable/Disable Port 1 State. After port 1 disabled, the port can't access the switch. Port>state 1 en Port>state 1 dis
Link Speed and Duplex	Syntax: Port Mode [<port_list>] [auto 10hdx 10fdx 100hdx 100fdx 1000fdx sfp_auto_ams 1000x_ams 100fx_ams 1000x 100fx] Example: Port>mode 2 1000fdx (Configure port 2 to 1000 Full Duplex) Port>mode 1-4 1000fdx (Configure port 1-4 to 1000 Full Duplex)
Flow Control	Syntax: Port Flow Control [<port_list>] [enable disable] Example: Port>flow cont 1 en (Enable Flow Control on Port 1) Port>flow cont 1 dis (Disable Flow Control on Port 2)

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

Maximum Frame Size	<p>Syntax:</p> <p>Port MaxFrame [<port_list>] [<max_frame>]</p> <p>Example: Set port 1-24's maximum frame size to 9K jumbo frame</p> <p>Port>maxf 1-24 9600</p>																								
Port Status																									
Port Status	<p>Port>conf 1-2</p> <p>Port Configuration:</p> <p>=====</p> <table border="1"> <thead> <tr> <th>Port</th> <th>State</th> <th>Mode</th> <th>Flow Control</th> <th>MaxFrame</th> <th>Power</th> <th>Excessive</th> <th>Link</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Enabled</td> <td>Auto</td> <td>Disabled</td> <td>9600</td> <td>Disabled</td> <td>Discard</td> <td>Down</td> </tr> <tr> <td>2</td> <td>Enabled</td> <td>Auto</td> <td>Disabled</td> <td>9600</td> <td>Disabled</td> <td>Discard</td> <td>1Gfdx</td> </tr> </tbody> </table> <p>.....</p>	Port	State	Mode	Flow Control	MaxFrame	Power	Excessive	Link	1	Enabled	Auto	Disabled	9600	Disabled	Discard	Down	2	Enabled	Auto	Disabled	9600	Disabled	Discard	1Gfdx
Port	State	Mode	Flow Control	MaxFrame	Power	Excessive	Link																		
1	Enabled	Auto	Disabled	9600	Disabled	Discard	Down																		
2	Enabled	Auto	Disabled	9600	Disabled	Discard	1Gfdx																		
Port Mode	<p>Port>mode 2</p> <p>Port Mode Link</p> <p>-----</p> <table border="1"> <tbody> <tr> <td>2</td> <td>Auto</td> <td>1Gfdx</td> </tr> </tbody> </table>	2	Auto	1Gfdx																					
2	Auto	1Gfdx																							
Port Status - All Information	<p>switch:/Port>config</p> <p>Port Configuration:</p> <p>=====</p> <table border="1"> <thead> <tr> <th>Port</th> <th>State</th> <th>Mode</th> <th>Flow Control</th> <th>MaxFrame</th> <th>Power</th> <th>Excessive</th> <th>Link</th> </tr> </thead> </table>	Port	State	Mode	Flow Control	MaxFrame	Power	Excessive	Link																
Port	State	Mode	Flow Control	MaxFrame	Power	Excessive	Link																		

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<pre> ----- 1 Enabled Auto Disabled 9600 Disabled Discard Down 2 Enabled Auto Disabled 9600 Disabled Discard 1Gfdx 3 Enabled Auto Disabled 9600 Disabled Discard Down </pre>
<p>Status of Link UP ports</p>	<pre> switch:/Port>conf all up Port Configuration: ===== Port State Mode Flow Control MaxFrame Power Excessive Link ----- 2 Enabled Auto Disabled 9600 Disabled Discard 1Gfdx </pre>
<p>Port Statistic</p>	<pre> switch:/Port>statistic 1 Port 1 Statistics: Rx Packets: 0 Tx Packets: 0 Rx Octets: 0 Tx Octets: 0 Rx Unicast: 0 Tx Unicast: 0 </pre>

Security Configuration

Feature	Command Line
Security-Switch Configuration	
Security -Switch Group	<pre>>securi swi Type 'up' to move up one level or '/' to go to root level Security/Switch>? Command Groups: ----- Security Switch Users : User management Security Switch Privilege: Privilege level Security Switch Auth : Authentication Security Switch SSH : Secure Shell Security Switch HTTPS : Hypertext Transfer Protocol over Secure Socket Layer Security Switch Access : Access management Security Switch SNMP : Simple Network Management Protocol Security Switch RMON : Remote Network Monitoring</pre>
User Configuration	<pre>Security/Switch>user ? Available Commands: Security Switch Users Configuration Security Switch Users Add <user_name> <password> <privilege_level> Security Switch Users Delete <user_name></pre>
Add New User	<p>Syntax:</p> <pre>Security Switch Users Add <user_name> <password> <privilege_level></pre> <p>Example: Add New User Name, Password with highest privilege, Name: Orwell, Password: password, Privilege: 15</p>

	Security/Switch>users add Orwell password 15								
Delete the User	<p>Syntax:</p> <p>Security Switch Users Delete <user_name></p> <p>Example: Delete the User, Orwell from User Name database</p> <p>Security/Switch>users del Orwell</p>								
User Name Database	<p>Security/Switch>users conf</p> <p>Users Configuration:</p> <p>=====</p> <table border="0"> <thead> <tr> <th style="text-align: left;">User Name</th> <th style="text-align: right;">Privilege Level</th> </tr> <tr> <th colspan="2">-----</th> </tr> </thead> <tbody> <tr> <td>admin</td> <td style="text-align: right;">15</td> </tr> <tr> <td>Orwell</td> <td style="text-align: right;">15</td> </tr> </tbody> </table>	User Name	Privilege Level	-----		admin	15	Orwell	15
User Name	Privilege Level								

admin	15								
Orwell	15								
Privilege Level	<p>Syntax:</p> <p>Security Switch Privilege Level Group <group_name></p> <p style="padding-left: 40px;">[<cro>] [<crw>] [<sro>] [<srw>]</p> <p>(cro=Configuration Read-Only, crw=Configuration/Excute Read/Write, sro=Status/Statistics Read-Only, srw=Status/Statistics Read/Write)</p> <p>Example: Set Privilege level of VLAN Group</p> <p>Security/Switch/Privilege>level group VLANs 10 10 10 10</p> <p>(cro=10, crw=10, sro=10, srw=10)</p>								

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

<p>Privilege Level Configuration Table</p>	<pre>Security/Switch>pri level conf Privilege Level Configuration: ===== Privilege Current Level: 15 Group Name Privilege Level CRO CRW SRO SRW ----- Aggregation 5 10 5 10 Debug 15 15 15 15 Diagnostics 5 10 5 10</pre>
<p>Authentication Method</p>	<p>Syntax:</p> <pre>Security Switch Auth Method [console telnet ssh web] [none local radius tacacs+] [enable disable]</pre> <p>Example: Configure Telnet Authentication method to Radius Enable</p> <pre>Security/Switch>auth method telnet radius en</pre>
<p>Authentication Configuration</p>	<pre>Security/Switch>auth conf Auth Configuration: ===== Client Authentication Method Local Authentication Fallback ----- - console local Disabled telnet local Disabled ssh local Disabled web local Disabled</pre>

SSH	<p>Syntax:</p> <p>Security Switch SSH Mode [enable disable]</p> <p>Example:</p> <p>Security/Switch>ssh mode en</p> <p>Security/Switch>ssh mode dis</p>
HTTPS	<p>Syntax:</p> <p>Security Switch HTTPS Mode [enable disable]</p> <p>Security/Switch>https mode en</p> <p>Security/Switch>https mode dis</p> <p>Security Switch HTTPS Redirect [enable disable]</p> <p>Security/Switch>https mode en (Must enabled HTTPS)</p> <p>Security/Switch>https redi en</p> <p>Result:</p> <p>Security/Switch>https conf</p> <p>HTTPS Configuration:</p> <p>=====</p> <p>HTTPS Mode : Enabled</p> <p>HTTPS Redirect Mode : Enabled</p>
Access Management	<p>Syntax:</p> <p>Security Switch Access Add <access_id> <start_ip_addr> <end_ip_addr> [web] [snmp] [telnet]</p> <p>Example: Limit the IP range from the 192.168.2.1 to</p>

	<p>192.168.2.10 can access the web UI.</p> <p>Security/Switch>access add 1 192.168.2.1 192.168.2.10 web</p>
<p>SNMP System Configuration (Mode, Version, Read /Write Community)</p>	<p>Syntax:</p> <p>Security Switch SNMP Mode [enable disable]</p> <p>Security Switch SNMP Version [1 2c 3]</p> <p>Security Switch SNMP Read Community [<community>]</p> <p>Security Switch SNMP Write Community [<community>]</p> <p>Example:</p> <p>Security/Switch>snmp mode en</p> <p>Security/Switch>snmp ver 2c</p> <p>Security/Switch/SNMP>read com abc</p> <p>Security/Switch/SNMP>write com orwell</p> <p>Result:</p> <p>SNMP Configuration:</p> <p>=====</p> <p>SNMP Mode : Enabled</p> <p>SNMP Version : 2c</p> <p>Read Community : abc</p> <p>Write Community : orwell</p>
<p>SNMP Community</p>	<p>Syntax:</p> <p>Security Switch SNMP Community Add <community> [<ip_addr>] [<ip_mask>]</p> <p>Security Switch SNMP Community Delete <index></p> <p>Security Switch SNMP Community Lookup [<index>]</p> <p>Example:</p>

	<pre>Security/Switch>snmp commu add abc Security/Switch>snmp commu add test 192.168.2.100 255.255.255.0</pre>
<p>SNMP Trap Server Setting</p>	<p>Enter the SNMP Trap Configuration Group</p> <pre>Security/Switch/SNMP>trap Type 'up' to move up one level or '/' to go to root level Security/Switch/SNMP/Trap></pre> <p>Syntax:</p> <pre>Security Switch SNMP Trap Mode [enable disable] Security Switch SNMP Trap Version [1 2c 3] Security Switch SNMP Trap Community [<community>] Security Switch SNMP Trap Destination [<ip_addr_string>] Security Switch SNMP Trap IPv6 Destination [<ipv6_addr>]</pre> <p>Example:</p> <pre>Security/Switch/SNMP/Trap>mode ena Security/Switch/SNMP/Trap>version 2c Security/Switch/SNMP/Trap>community public Security/Switch/SNMP/Trap>destination 192.168.2.100</pre> <p>Result:</p> <pre>Trap Mode : Enabled Trap Version : 2c Trap Community : public Trap Destination : 192.168.2.100 Trap IPv6 Destination : ::</pre>
<p>SNMP Trap Event Setting</p>	<p>Syntax:</p> <pre>Security Switch SNMP Trap Authentication Failure</pre>

	<p>[enable disable]</p> <p>Security Switch SNMP Trap Link-up [enable disable]</p> <p>Security Switch SNMP Trap Inform Mode [enable disable]</p> <p>Security Switch SNMP Trap Inform Timeout [<timeout>]</p> <p>Security Switch SNMP Trap Inform Retry Times [<retries>]</p> <p>Example:</p> <pre>Security/Switch/SNMP>trap auth fai en Security/Switch/SNMP>trap link-up en Security/Switch/SNMP>trap info mode en Security/Switch/SNMP>trap info time 5 Security/Switch/SNMP>trap info ret times 5</pre> <p>Result:</p> <pre>Trap Authentication Failure : Enabled Trap Link-up and Link-down : Enabled Trap Inform Mode : Enabled Trap Inform Timeout (seconds) : 5 Trap Inform Retry Times : 5</pre>										
SNMPv3 User	<p>Syntax:</p> <pre>Security Switch SNMP User Add <engineid> <user_name> [MD5 SHA] [<auth_password>] [DES] [<priv_password>]</pre> <p>Example: <pre>Security/Switch/SNMP>user add 800007e5017f000001 orwell Security/Switch/SNMP>user add 800007e5017f000001 andy md5 andy123</pre> <p>Result:</p> <p>SNMPv3 Users Table:</p> <table border="1"> <thead> <tr> <th>Idx</th> <th>Engine ID</th> <th>User Name</th> <th>Level</th> <th>Auth Priv</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> </p>	Idx	Engine ID	User Name	Level	Auth Priv					
Idx	Engine ID	User Name	Level	Auth Priv							

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<pre> ----- 1 Local default_user NoAuth, NoPriv None None 2 Local orwell NoAuth, NoPriv None None 3 Local andy Auth, NoPriv MD5 None Number of entries: 3 </pre>
<p>RMON</p>	<p>In Security/Switch Group, the system supports 4 types RMON groups, please follow the RMON Syntax to add the entries.</p> <p>Syntax:</p> <p>Security/Switch>rmon ?</p> <p>Statistics:</p> <p>Security Switch RMON Statistics Add <stats_id> <data_source></p> <p>Security Switch RMON Statistics Delete <stats_id></p> <p>Security Switch RMON Statistics Lookup [<stats_id>]</p> <p>Histroy:</p> <p>Security Switch RMON History Add <history_id> <data_source> [<interval>] [<buckets>]</p> <p>Security Switch RMON History Delete <history_id></p> <p>Security Switch RMON History Lookup [<history_id>]</p> <p>Alarm:</p> <p>Security Switch RMON Alarm Add <alarm_id> <interval> <alarm_vairable> [absolute delta] <rising_threshold> <rising_event_index> <falling_threshold> <falling_event_index> [rising falling both]</p> <p>Security Switch RMON Alarm Delete <alarm_id></p> <p>Security Switch RMON Alarm Lookup [<alarm_id>]</p> <p>Event:</p> <p>Security Switch RMON Event Add <event_id></p>

	<p>[none log trap log_trap] [<community>] [<description>]</p> <p>Security Switch RMON Event Delete <event_id></p> <p>Security Switch RMON Event Lookup [<event_id>]</p>
Security-Network Configuration	
Limit Control	
<p>Limit Control - System Configuration</p>	<p>Syntax:</p> <p>Security Network Limit Configuration [<port_list>]</p> <p>Security Network Limit Mode [enable disable]</p> <p>Security Network Limit Aging [enable disable]</p> <p>Security Network Limit Agetime [<age_time>]</p> <p>Example:</p> <p>Security/Network>limit mode enable</p> <p>Security/Network>limit agin enable</p> <p>Security/Network>limit agetim 1000</p> <p>Result:</p> <p>Port Security Limit Control Configuration:</p> <p>=====</p> <p>Mode : Enabled</p> <p>Aging : Disabled</p> <p>Age Period: 3600</p>
<p>Limit Control - Port Configuration</p>	<p>Syntax:</p> <p>Security Network Limit Port [<port_list>] [enable disable]</p> <p>Security Network Limit Limit [<port_list>] [<limit>]</p> <p>Security Network Limit Action [<port_list>] [none trap shut trap_shut]</p> <p>Security Network Limit Reopen [<port_list>]</p>

	<p>Example:</p> <pre>Security/Network>limit port 1 enabl Security/Network>limit limit 1 5 Security/Network>limit action 1 trap</pre>
<p>Network Access Server Configuration (also known as IEEE 802.1X)</p>	
<p>NAS System Configuration</p>	<p>Syntax:</p> <p>Mode:</p> <pre>Security Network NAS Mode [enable disable] Security Network NAS Reauthentication [enable disable]</pre> <p>Time Settings</p> <pre>Security Network NAS ReauthPeriod [<reauth_period>] Security Network NAS EapolTimeout [<eapol_timeout>] Security Network NAS Agetime [<age_time>] Security Network NAS Holdtime [<hold_time>]</pre> <p>Radius-Assigned</p> <pre>Security Network NAS RADIUS_QoS [global <port_list>] [enable disable] Security Network NAS RADIUS_VLAN [global <port_list>] [enable disable]</pre> <p>Guest VLAN</p> <pre>Security Network NAS Guest_VLAN [global <port_list>] [enable disable] [<vid>] [<reauth_max>] [<allow_if_eapol_seen>]</pre> <p>Example:</p> <pre>Guest_VLAN Global Enabled, Guest VLAN ID=100, Max. Re-Authentication Count = 10, Allow Guest VLAN if EAPOL See = Enable</pre>

	Security/Network>nas gues glob en 100 10 en
NAS Port Configuration	<p>Syntax:</p> <p>Security Network NAS State [<port_list>] [auto authorized unauthorized single multi macbased]</p> <p>auto= Port-based 802.1X authorized = Force Authorized unauthorized = Force Unauthorized single = Single 802.1X multi= Multi 802.1X macbased = MAC_Based Authentication</p> <p>Example:</p> <p>Security/Network>nas state 2 auto</p>
ACL (Access Control List)	
ACL Port Configuration	<p>Syntax:</p> <p>Security Network ACL Action [<port_list>] [permit deny] [<rate_limiter>] [<port_redirect>] [<mirror>] [<logging>] [<shutdown>]</p> <p>Parameters:</p> <p><port_list> : Port list or 'all', default: All ports permit : Permit forwarding (default) deny : Deny forwarding <rate_limiter> : Rate limiter number (1-15) or 'disable' <port_redirect>: Port list for copy of frames or 'disable' <mirror> : Mirror of frames: enable disable <logging> : System logging of frames: log log_disable <shutdown> : Shut down ingress port: shut shut_disable</p> <p>Example:</p>

	<p>Security/Network/ACL>Action 1 permit 10 dis en log shut</p> <p>Result:</p> <p>ACL Configuration:</p> <pre> ===== Port Policy Action Rate L. Port C. Mirror Logging Shutdown Counter ----- 1 0 Permit 10 Disabled Enabled Enabled Enabled 0 </pre>
<p>Rate Limiter</p>	<p>Syntax:</p> <p>Security Network ACL Rate [<rate_limiter_list>] [<rate_unit>] [<rate>]</p> <p>Parameters:</p> <p><rate_limiter_list>: Rate limiter list (1-16), default: All rate limiters</p> <p><rate_unit> : IP flags: pps kbps, default: pps</p> <p><rate>: Rate in pps (0-100) or kbps (0, 100, 2*100, 3*100, ..., 1000000)</p> <p>Example: Rate Limiter ID=10, Rate = 300kbps</p> <p>Security/Network/ACL>rate 10 kbps 300</p> <p>Result:</p> <pre> Rate Limiter Rate ----- 9 1 PPS 10 300 KBPS </pre>
<p>ACL Policy</p>	<p>Syntax:</p> <p>Security Network ACL Policy [<port_list>] [<policy>]</p>

	<p>Example:</p> <pre>Security/Network/ACL>policy 1 2</pre>
Access Control List	<p>Syntax:</p> <pre>Security Network ACL Add [<ace_id>] [<ace_id_next>] [(port <port_list>)] [(policy <policy> <policy_bitmask>)] [<tagged>] [<vid>] [<tag_prio>] [<dmac_type>] [(etype <etype>] [<smac>] [<dmac>)] (arp [<sip>] [<dip>] [<smac>] [<arp_opcode>] [<arp_flags>)] (ip [<sip>] [<dip>] [<protocol>] [<ip_flags>)] (icmp [<sip>] [<dip>] [<icmp_type>] [<icmp_code>] [<ip_flags>]) (udp [<sip>] [<dip>] [<sport>] [<dport>] [<ip_flags>]) (tcp [<sip>] [<dip>] [<sport>] [<dport>] [<ip_flags>] [<tcp_flags>]) [permit deny] [<rate_limiter>] [<port_redirect>] [<mirror>] [<logging>][<shutdown>]</pre> <p>Parameters:</p> <p><ace_id> : ACE ID (1-256), default: Next available ID</p> <p><ace_id_next> : Next ACE ID (1-256), default: Add ACE last</p> <p>port : Port ACE keyword</p> <p><port_list> : Port list or 'all', default: All ports</p> <p>policy : Policy ACE keyword</p> <p><policy> : Policy number (0-255)</p> <p><policy_bitmask>: Policy number bitmask (0x0-0xFF)</p> <p><tagged> : Tagged of frames: any enable disable</p> <p><vid> : VLAN ID (1-4095) or 'any'</p> <p><tag_prio> : VLAN tag priority (0-7) or 'any'</p> <p><dmac_type> : DMAC type: any unicast multicast broadcast</p> <p>etype : Ethernet Type keyword</p> <p><etype> : Ethernet Type: 0x600 - 0xFFFF or 'any' but excluding 0x800(IPv4) 0x806(ARP) and 0x86DD(IPv6)</p> <p><smac> : Source MAC address ('xx-xx-xx-xx-xx-xx' or 'xx.xx.xx.xx.xx.xx' or 'xxxxxxxxxxxx', x is a hexadecimal</p>

	digit) or 'any' <dmac> : Destination MAC address ('xx-xx-xx-xx-xx-xx' or 'xx.xx.xx.xx.xx.xx' or 'xxxxxxxxxxxx', x is a hexadecimal digit) or 'any' arp : ARP keyword <sip> : Source IP address (a.b.c.d/n) or 'any' <dip> : Destination IP address (a.b.c.d/n) or 'any' <arp_opcode> : ARP operation code: any arp rarp other <arp_flags> : ARP flags: request smac tmac len ip ether [0 1 any] ip : IP keyword <protocol> : IP protocol number (0-255) or 'any' <ip_flags> : IP flags: ttl options fragment [0 1 any] icmp : ICMP keyword <icmp_type> : ICMP type number (0-255) or 'any' <icmp_code> : ICMP code number (0-255) or 'any' udp : UDP keyword <sport> : Source UDP/TCP port range (0-65535) or 'any' <dport> : Destination UDP/TCP port range (0-65535) or 'any' tcp : TCP keyword <tcp_flags> : TCP flags: fin syn rst psh ack urg [0 1 any] permit : Permit forwarding (default) deny : Deny forwarding <rate_limiter> : Rate limiter number (1-15) or 'disable' <port_redirect> : Port list for copy of frames or 'disable' <mirror> : Mirror of frames: enable disable <logging> : System logging of frames: log log_disable <shutdown> : Shut down ingress port: shut shut_disable Example: Add one ACE: Security/Network/ACL>add 2 port 6-10 policy 3 8 ip
--	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<p>ACE ID 2 added last</p> <p>Edit one ACE:</p> <p>Security/Network/ACL>add 1 port 1-5 policy 2 8 any</p> <p>ACE ID 1 modified last</p> <p>Result:</p> <table border="1"> <thead> <tr> <th>ID</th> <th>Type</th> <th>Port</th> <th>Policy</th> <th>Frame</th> <th>Action</th> <th>Rate L.</th> <th>Port C.</th> <th>Mirror</th> <th>Counter</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>User</td> <td>1-5</td> <td>2 /0x8</td> <td>Any</td> <td>Permit</td> <td>Disabled</td> <td>Disabled</td> <td>Disabled</td> <td>0</td> </tr> <tr> <td>2</td> <td>User</td> <td>6-10</td> <td>3 /0x8</td> <td>IP</td> <td>Permit</td> <td>Disabled</td> <td>Disabled</td> <td>Disabled</td> <td>0</td> </tr> </tbody> </table>	ID	Type	Port	Policy	Frame	Action	Rate L.	Port C.	Mirror	Counter	1	User	1-5	2 /0x8	Any	Permit	Disabled	Disabled	Disabled	0	2	User	6-10	3 /0x8	IP	Permit	Disabled	Disabled	Disabled	0
ID	Type	Port	Policy	Frame	Action	Rate L.	Port C.	Mirror	Counter																						
1	User	1-5	2 /0x8	Any	Permit	Disabled	Disabled	Disabled	0																						
2	User	6-10	3 /0x8	IP	Permit	Disabled	Disabled	Disabled	0																						
DHCP																															
DHCP Snooping	<p>Syntax:</p> <p>Security Network DHCP Snooping Mode [enable disable]</p> <p>Security Network DHCP Snooping Port Mode [<port_list> [trusted untrusted]]</p> <p>Security Network DHCP Snooping Statistics [<port_list> [clear]]</p> <p>Example:</p> <p>Security/Network>dhcp snooping mode en</p> <p>Security/Network>dhcp snooping port mode 1 tru (Port 1)</p> <p>Security/Network>dhcp snooping port mode 1-10 tru (Port 1-10)</p>																														
DHCP Relay	<p>Syntax:</p> <p>Security Network DHCP Relay Mode [enable disable]</p> <p>Security Network DHCP Relay Server [<ip_addr>]</p> <p>Security Network DHCP Relay Information Mode [enable disable]</p> <p>Security Network DHCP Relay Information Policy [replace keep drop]</p>																														

	<p>Example:</p> <pre>Security/Network>dhcp relay server 192.168.2.100 Security/Network>dhcp relay mode en (Assign one Server IP before enable the Relay mode) Security/Network>dhcp rel info mode en Security/Network>dhcp rel info policy keep</pre>
IP Source Guard	
<p>IP Source Guard Configuration</p>	<p>Syntax:</p> <pre>Security Network IP Source Guard Configuration Security Network IP Source Guard Mode [enable disable] Security Network IP Source Guard Port Mode [<port_list>] [enable disable] Security Network IP Source Guard limit [<port_list>] [<dynamic_entry_limit> unlimited] Security Network IP Source Guard Entry [<port_list>] add delete <vid> <allowed_ip> <allowed_mac> Security Network IP Source Guard Status [<port_list>] Security Network IP Source Guard Translation</pre> <p>Example:</p> <pre>Security/Network>ip source guard mode en Security/Network>ip source guard port mode 1-10 en (Port 1-10) Security/Network>ip source guard limit 1-10 2 (limit 2 MAC Address)</pre>
<p>IP Source Guard Static Table</p>	<p>Syntax:</p> <pre>Security Network IP Source Guard Entry [<port_list>] add delete <vid> <allowed_ip> <allowed_mac></pre> <p>Example:</p>

	<pre>Security/Network>ip source guard entry 5 add 2 192.168.2.101 001122334455</pre> <p>Result:</p> <p>IP Source Guard Entry Table:</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Port</th> <th>VLAN</th> <th>IP Address</th> <th>MAC Address</th> </tr> </thead> <tbody> <tr> <td>Static</td> <td>1</td> <td>1</td> <td>192.168.2.10</td> <td>11-22-33-44-55-66</td> </tr> <tr> <td>Static</td> <td>5</td> <td>2</td> <td>192.168.2.101</td> <td>00-0b-16-21-2c-37</td> </tr> </tbody> </table>	Type	Port	VLAN	IP Address	MAC Address	Static	1	1	192.168.2.10	11-22-33-44-55-66	Static	5	2	192.168.2.101	00-0b-16-21-2c-37
Type	Port	VLAN	IP Address	MAC Address												
Static	1	1	192.168.2.10	11-22-33-44-55-66												
Static	5	2	192.168.2.101	00-0b-16-21-2c-37												
ARP Inspection																
<p>ARP Inspection</p>	<p>Syntax:</p> <p>Security Network ARP Inspection Configuration</p> <p>Security Network ARP Inspection Mode [enable disable]</p> <p>Security Network ARP Inspection Port Mode [<port_list> [enable disable]</p> <p>Security Network ARP Inspection Entry [<port_list> add delete <vid> <allowed_mac> <allowed_ip></p> <p>Security Network ARP Inspection Status [<port_list>]</p> <p>Security Network ARP Inspection Translation</p> <p>Example:</p> <pre>Security/Network>arp inspection mode en Security/Network>arp inspection port mode 1-10 en Security/Network>arp inspection entry 1 add 10 112233445566 192.168.2.10</pre> <pre>Security/Network>arp inspection status</pre> <p>ARP Inspection Entry Table:</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Port</th> <th>VLAN</th> <th>MAC Address</th> <th>IP Address</th> </tr> </thead> </table>	Type	Port	VLAN	MAC Address	IP Address										
Type	Port	VLAN	MAC Address	IP Address												

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<pre>----- --- --- ----- ----- Static 1 10 0b-16-21-2c-37-42 192.168.2.10</pre>
Security-AAA Configuration	
Common Server Configuration	<p>Syntax:</p> <p>Security AAA Timeout [<timeout>]</p> <p>Security AAA Deadtme [<dead_time>]</p>
RADIUS Authentication Server	<p>Syntax:</p> <p>Security AAA RADIUS [<server_index>] [enable disable] [<ip_addr_string>] [<secret>] [<server_port>]</p> <p>Example:</p> <p>Security>aaa radi 1 en 192.168.2.200 password 1812</p>
RADIUS Accounting Server	<p>Syntax:</p> <p>Security AAA ACCT_RADIUS [<server_index>] [enable disable] [<ip_addr_string>] [<secret>] [<server_port>]</p> <p>Example:</p> <p>Security>aaa ACCT_radi 1 en 192.168.2.200 password 1813</p>
TACACS+ Authentication Server	<p>Syntax:</p> <p>Security AAA TACACS+ [<server_index>] [enable disable] [<ip_addr_string>] [<secret>] [<server_port>]</p> <p>Example:</p> <p>Security>aaa tacacs+ 1 en 192.168.2.200 password 49</p>
AAA Configuration	<p>Security>aaa con</p> <p>AAA Configuration:</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

```

=====
Server Timeout   : 15 seconds

Server Dead Time : 300 seconds

RADIUS Authentication Server Configuration:

=====

Server  Mode   IP Address   Secret          Port

-----  -----  -
1      Enabled  192.168.2.200  *****        1812
2      Disabled
3      Disabled
4      Disabled
5      Disabled

RADIUS Accounting Server Configuration:

=====

Server  Mode   IP Address   Secret          Port

-----  -----  -
1      Enabled  192.168.2.200  *****        1813
2      Disabled
3      Disabled
4      Disabled
5      Disabled

TACACS+ Authentication Server Configuration:

=====

Server  Mode   IP Address   Secret          Port

-----  -----  -
1      Enabled  192.168.2.200  *****        49
2      Disabled
3      Disabled

```

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	4	Disabled	49
	5	Disabled	49
	Security>		

Aggregation Configuration

Feature	Command Line
Static Aggregation Configuration	
Aggregation Group Configuration	<p>Syntax: Aggr Add <port_list> [<aggr_id>]</p> <p>Example: Add port 5-8 to Group 1</p> <pre>>aggr add 5-8 1</pre> <p>>aggr del 1 (Delete the group 1)</p>
Hash Code Contributors	<p>Syntax: Aggr Mode [smac dmac ip port] [enable disable]</p> <p>smac = Source MAC Address dmac = Destination MAC Address ip = IP Address port = TCP/UDP Port Number</p> <p>Example: Only the Source MAC Hash is enabled. The rest mode are disabled.</p> <pre>>agg mode smac en >agg mode dmac dis >agg mode ip dis >agg mode port dis</pre>
LACP	
LACP Port Configuration	<p>Syntax: LACP Configuration [<port_list>] LACP Mode [<port_list>] [enable disable]</p>

	<p>LACP Key [<port_list>] [<key>] LACP Role [<port_list>] [active passive] LACP Status [<port_list>] LACP Statistics [<port_list>] [clear]</p> <p>Example: Configure port 5-8 to a LACP group</p> <pre>>lacp mode 5-8 en (Mode = Enable) >lacp key 5-8 100 (Key = 100) >lacp role 5-8 act (Role = Enable)</pre>
--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Loop Protection

Feature	Command Line
General Settings	
Enable Loop Protection	<p>Syntax:</p> <p>Loop Protect Mode [enable disable]</p> <p>Loop Protect Transmit [<transmit-time>]</p> <p>Loop Protect Shutdown [<shutdown-time>]</p> <p>Example:</p> <p>>loop protect mode en</p>
Transmission Time	>loop protect trans 10 (10 seconds)
Shutdown Time	>loop protect shut 200 (200 seconds)
Port Configuration	
Loop Protection - Port Configuration	<p>Syntax:</p> <p>Loop Protect Port Mode [<port_list>] [enable disable]</p> <p>Loop Protect Port Action [<port_list>] [shutdown shut_log log]</p> <p>Loop Protect Port Transmit [<port_list>] [enable disable]</p> <p>Example:</p> <p>Loop/Protect>port mode 1 en</p> <p>Loop/Protect>port action 1 shut_log (Shutdown Port and Log)</p> <p>Loop/Protect>port transmit 1 en</p>

Spanning Tree

Feature	Command Line
Bridge Configuration	
Protocol Version	<p>Syntax: STP Version [<stp_version>]</p> <p>Parameters: <stp_version>: mstp rstp stp</p> <p>Example: STP>ver rstp</p>
Bridge Priority	<p>Syntax: STP Msti Priority [<msti>] [<priority>]</p> <p>Example: STP>msti pri MSTI# Bridge Priority ---- ----- CIST 32768</p> <p>STP>msti pri 4096</p> <p>(The available priority parameter includes: 0, 4096, 8192, 12288, 16384, 20480, 24576, 28672, 32768, 36864, 40960, 45056, 49152, 53248, 57344, 61440)</p>
Forward Delay	<p>Syntax: STP FwdDelay [<delay>]</p> <p>(Valid values are in the range 4 to 30 seconds)</p>
Max. Age	<p>Syntax: STP MaxAge [<max_age>]</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	(Valid values are in the range 6 to 40 seconds, <i>and</i> MaxAge must be $\leq (\text{FwdDelay}-1)*2$.)
Maximum Hop Count	<p>Syntax:</p> <p>STP MaxHops [<maxhops>]</p> <p>(Valid values are in the range 6 to 40 hops)</p>
Transmit Hold Count	<p>Syntax:</p> <p>STP Txhold [<holdcount>]</p> <p>(Valid values are in the range 1 to 10 BPDU's per second.)</p>
Advanced Setting	<p>Syntax:</p> <p>STP bpduFilter [enable disable]</p> <p>STP bpduGuard [enable disable]</p> <p>STP recovery [<timeout>]</p> <p>(After recovery timeout time is set, the recovery is enabled automatically.)</p>
MSTI Mapping	
MSTI/VLAN Mapping	<p>Syntax:</p> <p>STP Msti Add <msti> <vid-range></p> <p>Example:</p> <p>STP>mst add 1 100</p> <p>Add VLAN 100 to MSTI1</p> <p>STP>mst map</p> <p>MSTI VLANs mapped to MSTI</p> <p>---- -----</p> <p>MSTI1 100</p> <p>MSTI2 No VLANs mapped</p> <p>MSTI3 No VLANs mapped</p> <p>MSTI4 No VLANs mapped</p> <p>MSTI5 No VLANs mapped</p>

	<p>MSTI6 No VLANs mapped</p> <p>MSTI7 No VLANs mapped</p>
Port Setting	
STP Port Mode	<p>Syntax:</p> <p>STP Port Mode [<port_list>] [enable disable]</p> <p>STP Port Edge [<port_list>] [enable disable]</p> <p>STP Port AutoEdge [<port_list>] [enable disable]</p> <p>STP Port P2P [<port_list>] [enable disable auto]</p> <p>STP Port RestrictedRole [<port_list>] [enable disable]</p> <p>STP Port RestrictedTcn [<port_list>] [enable disable]</p> <p>STP Port bpduGuard [<port_list>] [enable disable]</p> <p>STP Port Statistics [<port_list>] [clear]</p> <p>Example:</p> <p>STP>port mode 1-24 dis (Disable STP on port 1-24)</p> <p>STP>port edge 1-24 en (Enable Edge port on port 1-24)</p> <p>STP>port autoedge 1-24 en (Enable Auto Edge on P1-24)</p> <p>STP>port p2p 1-24 en (Enable P2P mode on P1-24)</p> <p>STP>port p2p 1-24 auto (Enable Automatic P2P detection)</p> <p>STP>port bpdu 1-24 en (Enable BPDUGuard on P1-24)</p>
Port Path Cost	<p>Syntax:</p> <p>STP Msti Port Cost [<msti>] [<port_list>] [<path_cost>]</p> <p>Parameters:</p> <p><msti> : STP bridge instance no (0-7, CIST=0, MSTI1=1, ...)</p> <p><port_list>: Port list or 'all'. Port zero means aggregations.</p> <p><path_cost>: STP port path cost (1-200000000) or 'auto'</p> <p>Example: Configure CIST 0 Port Path Cost</p>

	<p>STP>msti port cost 0 all auto (Path cost = auto) STP>msti port cost 0 all 100000 (Path cost = 100000)</p>
<p>Port Priority</p>	<p>Syntax: STP Msti Port Priority [<msti>] [<port_list>] [<priority>]</p> <p>Parameters: <msti> : STP bridge instance no (0-7, CIST=0, MSTI1=1, ...) <port_list>: Port list or 'all'. Port zero means aggregations. <priority> : STP port priority (0/16/32/48/.../224/240)</p> <p>Example: Configure CIST 0 Port Priority STP Msti Port Priority [<msti>] [<port_list>] [<priority>] STP>msti port priority 0 5 240 (Port 5 Priority = 240) STP>msti port priority 0 all 128 (All Ports' priority = 128)</p> <p>Example: Configure MSTI 1 Port Priority STP>msti port priority 1 5 240 (MSTI1 port 5 priority=240)</p>

MVR

Feature	Command Line												
MVR Configuration													
MVR Mode	<p>Syntax:</p> <p>MVR Mode [enable disable]</p>												
MVR - VLAN Interface Setting	<p>Syntax:</p> <p>MVR VLAN Setup [<msgid>] [add del upd] [(Name <mvr_name>)]</p> <p>Example: MVR VLAN 2, MVR Name = Source2</p> <p>MVR>vlan setup 2 add Name Source2</p>												
MVR - Port Role	<p>Syntax:</p> <p>MVR VLAN Port [<vid> <mvr_name>] [<port_list>] [source receiver inactive]</p> <p>Example: Port 2 = Source Port, Port 6-7 = Receiver Port</p> <p>MVR>vlan port 2 2 source</p> <p>MVR>vlan port 2 6-7 rec</p>												
Immediately Leave	<p>Syntax:</p> <p>MVR Immediate Leave [<port_list>] [enable disable]</p> <p>Example:</p> <p>MVR>immedi leave 1-10 en</p>												
MVR Configuration	<p>MVR>conf (View the settings of above configuration)</p> <p>MVR Configuration:</p> <p>=====</p> <p>MVR Mode: Enabled</p> <p>MVR Interface Setting</p> <table border="1"> <thead> <tr> <th>VID</th> <th>Name</th> <th>Mode</th> <th>Tagging</th> <th>Priority</th> <th>LLQI</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Source2</td> <td>Dynamic</td> <td>Tagged</td> <td>0</td> <td>5</td> </tr> </tbody> </table>	VID	Name	Mode	Tagging	Priority	LLQI	2	Source2	Dynamic	Tagged	0	5
VID	Name	Mode	Tagging	Priority	LLQI								
2	Source2	Dynamic	Tagged	0	5								

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<pre>[Port Setting of Source2(VID-2)] Source Port : 2 Receiver Port: 6,7 Inactive Port: 1,3-5,8-26 [Channel Setting of Source2(VID-2)] <Empty Channel Table> MVR Immediate Leave Setting Port Immediate Leave ----- 1 Enabled 2 Enabled 3 Enabled 4 Enabled 5 Enabled 6 Enabled 7 Enabled 8 Enabled 9 Enabled 10 Enabled 11 Disabled 12 Disabled</pre>
--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

IPMC

Feature	Command Line
IGMP Snooping Configuration	
IGMP Snooping Enable	<p>Syntax:</p> <p>IPMC Mode [mld igmp] [enable disable]</p> <p>Example:</p> <p>IPMC>mode igmp en</p>
Unregistered IPMCv4 Flooding Enabled	<p>Syntax:</p> <p>IPMC Flooding [mld igmp] [enable disable]</p> <p>Example:</p> <p>IPMC>flood igmp en</p>
IGMP SSM Range (Source-Specific Multicast)	<p>Syntax:</p> <p>IPMC SSM [mld igmp] [(Range <prefix> <mask_len>)]</p> <p>Example:</p> <p>IPMC>ssm igmp range 239.0.0.0 8</p> <p>(Range from 239.0.0.0, mask length=8)</p>
Leave Proxy Enable	<p>Syntax:</p> <p>IPMC Leave Proxy [mld igmp] [enable disable]</p> <p>Example:</p> <p>IPMC>leave proxy igmp en (Enable)</p> <p>IPMC>leave proxy igmp dis (Disable)</p>
Proxy Enable	<p>Syntax:</p> <p>IPMC Proxy [mld igmp] [enable disable]</p> <p>Example:</p> <p>IPMC>proxy igmp en (Enable)</p>

	IPMC>proxy igmp dis (Disable)
<p>Port Related Configuration</p> <p>(Router Port, Fast Leave, Throttling)</p>	<p>Syntax:</p> <p>IPMC Router [mld igmp] [<port_list>] [enable disable]</p> <p>IPMC Fastleave [mld igmp] [<port_list>] [enable disable]</p> <p>IPMC Throttling [mld igmp] [<port_list>] [limit_group_number]</p> <p>Example:</p> <p>IPMC>router igmp 25-26 en (Port 25-26 are router ports)</p> <p>IPMC>Fast igmp 1-24 en (Enable IGMP Fast Leave on P1-24)</p> <p>IPMC>thro igmp 1-2 5 (Throtting of Port 1, 2 is 5 groups.)</p>
VLAN Configuration	<p>Syntax:</p> <p>IPMC State [mld igmp] [<vid>] [enable disable]</p> <p>IPMC Querier [mld igmp] [<vid>] [enable disable]</p> <p>IPMC Compatibility [mld igmp] [<vid>] [auto v1 v2 v3]</p> <p>IPMC Parameter RV [mld igmp] [<vid>] [ipmc_param_rv]</p> <p>IPMC Parameter QI [mld igmp] [<vid>] [ipmc_param_qi]</p> <p>IPMC Parameter QRI [mld igmp] [<vid>] [ipmc_param_qri]</p> <p>IPMC Parameter LLQI [mld igmp] [<vid>] [ipmc_param_llqi]</p> <p>IPMC Parameter URI [mld igmp] [<vid>] [ipmc_param_uri]</p> <p>Example:</p> <p>IPMC>state igmp 2 en (Enable IGMP Snooping on VLAN 2)</p> <p>IPMC>quer igmp 2 en (Enable IGMP Querier on VLAN 2)</p> <p>IPMC>compa igmp 2 v2 (Enable IGMPv2 on VLAN 2)</p>
MLD Snooping	
MLD Snooping	Note: The MLD Snooping is applied to IPv6 Multicast. The commands are the same as above IGMP Snooping (IPv4) Commands. Just chooses mld instead of igmp when seeing

	[mld igmp] in the syntax. The IP Address should be IPv6 format for sure.
--	--------------------------------------------------------------------------

LLDP Configuration

Feature	Command Line
LLDP Parameters	
LLDP Timers	<p>Syntax:</p> <p>LLDP Interval [<interval>] LLDP Hold [<hold>] LLDP Delay [<delay>] LLDP Reinit [<reinit>]</p> <p>Example:</p> <p>LLDP>interval 30 LLDP>hold 4 LLDP>delay 2 LLDP>reini 2</p>
LLDP Mode	<p>Syntax:</p> <p>LLDP Mode [<port_list>] [enable disable rx tx] (rx=RX Only, tx=TX Only)</p> <p>Example: Enable LLDP on Ports</p> <p>LLDP>mode 1-10 en (Port 1-10 are enabled) LLDP>mode 1-26 en (Port 1-26 are enabled)</p>
CDP aware	<p>Syntax:</p> <p>LLDP cdp_aware [<port_list>] [enable disable]</p> <p>Example: Enable CDP on Port 1-5</p> <p>LLDP>cdp_a 1-5 en (CDP on Port 1-5 are enabled)</p>
LLDP Optional_TLV Parameters	<p>Syntax:</p> <p>LLDP optional_TLV [<port_list>] [port_descr sys_name sys_descr sys_capa mgmt_addr] [enable disable]</p> <p>Example:</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	LLDP>option 1-3 port en
	LLDP>option 1-3 sys_name en
	LLDP>option 1-3 sys_desc en
	LLDP>option 1-3 sys_capa en
	LLDP>option 1-3 mgmt_add en

MAC Address Table Configuration

Feature	Command Line
MAC Address Table Configuration	
Aging Time Configuration	<p>Syntax:</p> <p>MAC Agetime [<age_time>]</p> <p>Parameters:</p> <p><age_time>: MAC address age time (0,10-1000000) 0=disable</p> <p>Example:</p> <p>MAC>age 100 (change aging time to 100 seconds, the aging time range is 10-1000000)</p> <p>MAC>age 0 (0 = Disable Aging time)</p>
MAC Learning Configuration	<p>Syntax:</p> <p>MAC Learning [<port_list>] [auto disable secure]</p> <p>Example:</p> <p>MAC>lear 1-8 sec</p> <p>MAC>lear 9-12 dis</p> <p>MAC>learn 1-12 auto</p>
Static MAC Table	<p>Syntax:</p> <p>MAC Add <mac_addr> <port_list> [<vid>]</p> <p>Example:</p> <p>MAC>add 0b16212c3742 1-5 1 (This type will be changed to hexadecimal automatically.)</p> <p>MAC>add 0b-16-21-2c-37-42 1-10 1 (This type is hexadecimal, it will not be changed.)</p> <p>Result:</p> <p>Non-volatile static:</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

VID	MAC Address	Ports
---	-----	----
1	00-10-15-02-25-2a	1-5
1	0b-16-21-2c-37-42	1-10

VLAN Configuration

Feature	Command Line
VLAN Configuration	
VLAN Membership	<p>Syntax:</p> <p>VLAN Add <vid> <name> [<ports_list>]</p> <p>VLAN Name Add <name> <vid></p> <p>Example:</p> <p>VLAN>add 3 5-8 (Add port 5-8 to VLAN 3)</p> <p>VLAN>name add vlan3 3 (vlan3 is the name of VLAN 3)</p>
Port Configuration	<p>Syntax:</p> <p>VLAN FrameType [<port_list>] [all tagged untagged]</p> <p>VLAN IngressFilter [<port_list>] [enable disable]</p> <p>VLAN tx_tag [<port_list>] [untag_pvid untag_all tag_all]</p> <p>VLAN PortType [<port_list>] [unaware c-port s-port s-custom-port]</p> <p>Example:</p> <p>VLAN>framety 1-3 all</p> <p>VLAN>ingr 1-3 en</p> <p>VLAN>tx_t 1-3 untag_pvid</p> <p>VLAN>portty 1-3 un</p>

Private VLAN Configuration

Feature	Command Line
PVLAN Configuration	
PVLAN Configuration	<p>Syntax:</p> <p>PVLAN Configuration [<port_list>] PVLAN Add <pvlan_id> [<port_list>] PVLAN Delete <pvlan_id> PVLAN Lookup [<pvlan_id>] PVLAN Isolate [<port_list>] [enable disable]</p> <p>Example:</p> <pre>PVLAN>add 10 9-12 PVLAN>add 10 1-2 PVLAN>add 20 1-2 PVLAN>add 20 13-18 PVLAN>iso 9-18 en (Enable Isolated Ports)</pre> <p>Result:</p> <pre> PVLAN ID Ports ----- - 1 1-8,17-26 10 1,2 20 13-18 </pre>

VCL Configuration

Feature	Command Line
MAC-based VLAN Configuration	
MAC-based VLAN Configuration	<p>Syntax: VCL Macvlan Add <mac_addr> <vid> [<port_list>]</p> <p>Example: VCL/Macvlan>add 001122334455 10 1-4</p> <p>Result: VCL/Macvlan>conf</p> <pre> MAC Address VID Ports ----- 00-0b-16-21-2c-37 10 1-4 </pre>
Protocol-based VLAN Configuration	
Protocol to Group	<p>Syntax: VCL ProtoVlan Protocol Add Eth2 <ether_type> arp ip ipx at <group_id></p> <p>Example: VCL/ProtoVlan>protocol add Eth2 0x0808 E4</p>
Group to VLAN	<p>Syntax: VCL ProtoVlan Vlan Add [<port_list>] <group_id> <vid></p> <p>Example: VCL/ProtoVlan>vlan add 1-8 E4 10</p>
Protocol VLAN Configuration	<p>Result: VCL/ProtoVlan>conf</p> <pre> Protocol Type Protocol (Value) Group ID </pre>

	<pre> ----- EthernetII ETYP:0x808 E4 LLC_Other DSAP:0xff; SSAP:0xff L3 LLC_SNAP OUI-00:e0:2b; PID:0x1 S2 EthernetII ETYP:0x800 E1 Group ID VID Ports ----- E4 10 1-8 E1 10 5-8 </pre>
IP Subnet-based VLAN Configuration	
<p>IP Subnet-based VLAN Configuration</p>	<p>Syntax:</p> <p>VCL IPvlan Add [<vce_id>] <ip_addr_mask> <vid> [<port_list>]</p> <p>Parameters:</p> <p><vce_id> : Unique VCE ID for each VCL entry</p> <p><ip_addr_mask>: Source IP address and mask (Format: a.b.c.d/n).</p> <p><vid> : VLAN ID (1-4095)</p> <p><port_list> : Port list or 'all', default: All ports</p> <p>Example:</p> <p>VCL/IPvlan>add 1 192.168.10.0/24 10 1-10</p> <p>Result:</p> <pre> VCE ID IP Address Mask Length VID Ports ----- 1 192.168.10.0 24 10 1-10 </pre>

Voice VLAN Configuration

Feature	Command Line
Voice VLAN Configuration	
Voice VLAN Configuration	<p>Syntax:</p> <p>Voice VLAN Mode [enable disable] Voice VLAN ID [<vid>] Voice VLAN Agetime [<age_time>] Voice VLAN Traffic Class [<class>]</p> <p>Example:</p> <p>Voice>vlan mode en Voice>vlan id 100 Voice>vlan age 86400 Voice>vlan traff class 7</p> <p>Result:</p> <p>Voice VLAN Configuration: =====</p> <p>Voice VLAN Mode : Enabled Voice VLAN VLAN ID : 100 Voice VLAN Age Time(seconds) : 86400 Voice VLAN Traffic Class : 7</p>
Port Configuration	<p>Syntax:</p> <p>Voice VLAN Port Mode [<port_list>] [disable auto force] Voice VLAN Security [<port_list>] [enable disable] Voice VLAN Discovery Protocol [<port_list>] [oui lldp both]</p> <p>Example:</p> <p>Voice/VLAN>port mode 1-4 auto Voice/VLAN>security 1-4 en Voice/VLAN>disco pro 1-4 both</p> <p>Result:</p> <p>Voice VLAN Port Configuration:</p>

	<pre> ===== Port Mode Security Discovery Protocol ---- - 1 Auto Enabled Both 2 Auto Enabled Both 3 Auto Enabled Both 4 Auto Enabled Both </pre>
<p>OUI Configuration</p>	<p>Syntax:</p> <pre> Voice VLAN OUI Add <oui_addr> [<description>] Voice VLAN OUI Delete <oui_addr> Voice VLAN OUI Clear Voice VLAN OUI Lookup [<oui_addr>] </pre> <p>Example:</p> <pre> Voice/VLAN>oui add 00-12-08 hello </pre> <p>Result:</p> <pre> Voice/VLAN>oui lookup Voice VLAN OUI Table: ===== Telephony OUI Description ----- 00-01-E3 Siemens AG phones 00-03-6B Cisco phones 00-0F-E2 H3C phones 00-60-B9 Philips and NEC AG phones 00-D0-1E Pingtel phones 00-E0-75 Polycom phones 00-E0-BB 3Com phones 00-12-77 e10 00-12-08 hello </pre>

QoS Configuration

Feature	Command Line
QoS Configuration	
Port Classification	<p>Syntax:</p> <p>QoS Port Classification Class [<port_list>] [<class>] QoS Port Classification DPL [<port_list>] [<dpl>] QoS Port Classification PCP [<port_list>] [<pcp>] QoS Port Classification DEI [<port_list>] [<dei>] QoS Port Classification Tag [<port_list>] [enable disable] QoS Port Classification Map [<port_list>] [<pcp_list>] [<dei_list>] [<class>] [<dpl>] QoS Port Classification DSCP [<port_list>] [enable disable]</p> <p>Range of the Value:</p> <p><class>: QoS class (0-7) <dpl>: Drop Precedence Level (0-1) <pcp>: Priority Code Point (0-7) <dei>: Drop Eligible Indicator (0-1)</p> <p>Example:</p> <p>QoS/Port/Classification>clas 1-2 7 QoS/Port/Classification>dpl 1-2 1 QoS/Port/Classification>pcp 1-2 7 QoS/Port/Classification>dei 1-2 1 QoS/Port/Classification>tag 1-2 en QoS/Port/Classification>dscp 1-2 en</p>
QoS Ingress Port Tag Classification	<p>Syntax:</p> <p>QoS Port Classification Map [<port_list>] [<pcp_list>] [<dei_list>] [<class>] [<dpl>]</p>
Port Policing	<p>Syntax:</p> <p>QoS Port Policer Mode [<port_list>] [enable disable] QoS Port Policer Rate [<port_list>] [<rate>]</p>

	<p>QoS Port Policer Unit [<port_list>] [kbps fps] QoS Port Policer FlowControl [<port_list>] [enable disable]</p> <p><rate> : Rate in kbps or fps (100-3300000)</p> <p>Example:</p> <p>QoS/Port/Policer>mode 1-2 en QoS/Port/Policer>rate 1-2 300 QoS/Port/Policer>unit 1-2 kbps QoS/Port/Policer>flow 1-2 en</p>
Port Scheduler	<p>Syntax:</p> <p>Syntax: QoS Port Scheduler Mode [<port_list>] [strict weighted]</p> <p>Example:</p> <p>QoS/Port/Scheduler>mode 1-2 stric (Strict Priority)</p> <p>QoS/Port/Scheduler>mode 1-2 wei (Weighted)</p> <p>QoS Egress Port Scheduler and Shapers</p> <p>QoS/Port/Scheduler>wei 1-2 1 30 (Port 1-2, Q1=30) QoS/Port/Scheduler>wei 1-2 2 30 (Port 1-2, Q2=30)</p>

	<p>The diagram illustrates the QoS configuration flow. On the left, there are eight Queue Shaper entries (Q0-Q7). Each entry has a 'Rate' field set to 500 and a 'Unit' dropdown set to 'kbps'. The Queue Scheduler is divided into two sections: 'DWRRR' and 'STRICT'. The Queue Shaper entries are mapped to the Queue Scheduler as follows: Q0, Q3, Q4, and Q5 are mapped to DWRRR with weights of 10 and 10% each; Q1 and Q2 are mapped to DWRRR with weights of 30 and 30% each; Q6 and Q7 are mapped to STRICT. The output of the Queue Scheduler is then processed by a Port Shaper, which has a 'Rate' field set to 500 and a 'Unit' dropdown set to 'kbps'.</p>
<p>Port Shaping</p>	<p>Syntax:</p> <p>Port Shaper:</p> <p>QoS Port Shaper Mode [<port_list>] [enable disable]</p> <p>QoS Port Shaper Rate [<port_list>] [<bit_rate>]</p> <p>Queue Shaper:</p> <p>QoS Port QueueShaper Mode [<port_list>] [<queue_list>] [enable disable]</p> <p>QoS Port QueueShaper Rate [<port_list>] [<queue_list>] [<bit_rate>]</p> <p>QoS Port QueueShaper Excess [<port_list>] [<queue_list>] [enable disable]</p> <p>Parameters:</p> <p><port_list>: Port list or 'all', default: All ports</p> <p><bit_rate> : Rate in kilo bits per second (100-3300000)</p> <p>Example:</p> <p>QoS/Port/Shaper>rate 1-2 1000</p> <p>QoS/Port/QueueShaper>mode 1-2 all en (Queue Shaper)</p> <p>QoS/Port/QueueShaper>rate 1-2 all 600 (Queue Shaper)</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

<p>DSCP Configuration</p>	<p>Syntax:</p> <p>QoS Port DSCP Translation [<port_list>] [enable disable]</p> <p>QoS Port DSCP Classification [<port_list>] [none zero selected all]</p> <p>QoS Port DSCP EgressRemark [<port_list>] [disable enable remap_dp_unaware remap_dp_aware]</p> <p><i>Note: DSCP is an advanced QoS setting, please follow the DSCP table of upper access/core switch to configure the table. The table of the whole network must be unified.</i></p>
<p>Storm Configuration</p>	
<p>Storm Control</p>	<p>Syntax:</p> <p>QoS Storm Unicast [enable disable] [<packet_rate>]</p> <p>QoS Storm Multicast [enable disable] [<packet_rate>]</p> <p>QoS Storm Broadcast [enable disable] [<packet_rate>]</p> <p><packet_rate>: Rate in fps (1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1k, 2k, 4k, 8k, 16k, 32k, 64k, 128k, 256k, 512k, 1024k, 2048k, 4096k, 8192k, 16384k, 32768k)</p> <p>Example:</p> <p>QoS/Storm>unic en 32768k</p> <p>QoS/Storm>multi en 4096k</p> <p>QoS/Storm>broad en 4k</p>

Mirroring Configuration

Feature	Command Line																
Mirroring Configuration																	
Mirror Configuration	<p>Syntax:</p> <p>Mirror Port [<port> disable]</p> <p>Mirror Mode [<port_cpu_list>] [enable disable rx tx]</p> <p>Example:</p> <p>Mirror>port 5</p> <p>Mirror>mode 6-8 en</p> <p>Result:</p> <p>Mirror Configuration:</p> <p>=====</p> <p>Mirror Port: 5</p> <p>Port Mode</p> <p>---- -</p> <table border="0"> <tr><td>1</td><td>Disabled</td></tr> <tr><td>2</td><td>Disabled</td></tr> <tr><td>3</td><td>Disabled</td></tr> <tr><td>4</td><td>Disabled</td></tr> <tr><td>5</td><td>Disabled</td></tr> <tr><td>6</td><td>Enabled</td></tr> <tr><td>7</td><td>Enabled</td></tr> <tr><td>8</td><td>Enabled</td></tr> </table>	1	Disabled	2	Disabled	3	Disabled	4	Disabled	5	Disabled	6	Enabled	7	Enabled	8	Enabled
1	Disabled																
2	Disabled																
3	Disabled																
4	Disabled																
5	Disabled																
6	Enabled																
7	Enabled																
8	Enabled																

UPnP Configuration

Feature	Command Line
UPnP Configuration	
UPnP Configuration	<p>Syntax:</p> <p>UPnP Configuration</p> <p>UPnP Mode [enable disable]</p> <p>UPnP TTL [<ttl>]</p> <p>UPnP AdvertisingDuration [<duration>]</p> <p>Example:</p> <p>UPnP>mode en</p> <p>UPnP>tll 5 (Default=4)</p> <p>UPnP>adver 200 (Default=100)</p> <p>Result:</p> <p>UPnP Configuration:</p> <p>=====</p> <p>UPnP Mode : Enabled</p> <p>UPnP TTL : 5</p> <p>UPnP Advertising Duration : 200</p>

sFlow Configuration

Feature	Command Line
sFlow Configuration	
Receiver Configuration	<p>Syntax:</p> <p>sFlow Receiver [release] [<timeout>] [<ip_addr_host>] [<udp_port>] [<datagram_size>]</p> <p>Example:</p> <p>sFlow>receiver 10 192.168.2.100 6343 1400</p> <p>Result:</p> <p>Receiver Configuration: =====</p> <p>Owner : <none> Receiver : 192.168.2.100 UDP Port : 6343 Max. Datagram: 1400 bytes Time left : 0 seconds</p>
Receiver Release	sFlow>receiver
Port Configuration	<p>Syntax:</p> <p>sFlow Receiver [release] [<timeout>] [<ip_addr_host>] [<udp_port>] [<datagram_size>]</p> <p>sFlow FlowSampler [<port_list>] [<sampling_rate>] [<max_hdr_size>]</p> <p>sFlow CounterPoller [<port_list>] [<interval>]</p> <p>sFlow Statistics Receiver [clear]</p> <p>sFlow Statistics Samplers [<port_list>] [clear]</p> <p>Example:</p> <p>sFlow>flow 1-2 10 128 (Enable FlowSample on port 1-2,</p>

Chapter 4: Feature Configuration - CLI

Featuring Configuration – CLI

	<pre>rate=10, max. size=128) sFlow>coun 1-2 5 (Enable CounterPoller of port 1-2, and set interval to 5) sFlow>statistic sample 1-2 Per-Port Statistics: ===== Port Rx Flow Samples Tx Flow Samples Counter Samples ----- 1 0 0 0 2 0 0 0</pre>
--	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Diagnostic Commands


Feature	Command Line
Ping	
Ping Test	<p>Syntax:</p> <p>IP Ping <ip_addr_string> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)]</p> <p>Parameters:</p> <p><ip_addr_string>: IPv4 host address (a.b.c.d) or a host name string</p> <p>length : PING Length keyword</p> <p><ping_length> : Ping ICMP data length (2-1452; Default is 56), excluding MAC, IP and ICMP headers</p> <p>count : PING Count keyword</p> <p><ping_count> : Transmit ECHO_REQUEST packet count (1-60; Default is 5)</p> <p>interval : PING Interval keyword</p> <p><ping_interval> : Ping interval (0-30; Default is 0)</p> <p>Example: Ping IP 192.168.2.100</p> <pre>IP>ping 192.168.2.100 PING server 192.168.2.100, 56 bytes of data. 64 bytes from 192.168.2.100: icmp_seq=0, time=0ms 64 bytes from 192.168.2.100: icmp_seq=1, time=0ms 64 bytes from 192.168.2.100: icmp_seq=2, time=0ms 64 bytes from 192.168.2.100: icmp_seq=3, time=0ms 64 bytes from 192.168.2.100: icmp_seq=4, time=0ms Sent 5 packets, received 5 OK, 0 bad</pre>
IPv6 Ping Test	<p>Syntax:</p> <p>IP IPv6 Ping6 <ipv6_addr> [(Length <ping_length>)] [(Count <ping_count>)] [(Interval <ping_interval>)]</p> <p>Example:</p>

	switch:/IP>ipv6 ping6 2001:DB8::250:8bff:fee8:f800																		
VeriPHY	<p>Syntax:</p> <p>Port VeriPHY [<port_list>]</p> <p>Example:</p> <p>Port>veriphy 24</p> <p>Starting VeriPHY, please wait</p> <table border="1"> <thead> <tr> <th>Port</th> <th>Pair A</th> <th>Length</th> <th>Pair B</th> <th>Length</th> <th>Pair C</th> <th>Length</th> <th>Pair D</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>24</td> <td>OK</td> <td>0</td> <td>OK</td> <td>0</td> <td>OK</td> <td>0</td> <td>OK</td> <td>0</td> </tr> </tbody> </table>	Port	Pair A	Length	Pair B	Length	Pair C	Length	Pair D	Length	24	OK	0	OK	0	OK	0	OK	0
Port	Pair A	Length	Pair B	Length	Pair C	Length	Pair D	Length											
24	OK	0	OK	0	OK	0	OK	0											

Maintenance Commands

Feature	Command Line
Maintenance Commands	
Restart Device	<p>Syntax:</p> <p>System Reboot</p> <p>Example:</p> <p>System>reb</p> <p>System will reboot in a few seconds</p>
Factory Defaults	<p>Syntax:</p> <p>System Restore Default [keep_ip]</p> <p>Example:</p>
Software/Firmware (Firmware Version, Firmware Swapping, Firmware Update)	<p>Syntax:</p> <p>Firmware Information</p> <p>Firmware Swap</p> <p>Firmware Load <ip_addr_string> <file_name></p> <p>Parameters of Firmware Load:</p> <p><ip_addr_string>: IP host address (a.b.c.d) or a host name string</p> <p><file_name> : Firmware file name</p> <p>Example:</p> <p>Firmware Swapping</p> <p>Firmware>sw</p> <p>... Erase from 0x40fd0000-0x40fdffff: .</p> <p>... Program from 0x87ff0000-0x88000000 to 0x40fd0000: .</p> <p>... Program from 0x87ff000a-0x87ff000c to 0x40fd000a: .</p> <p>Alternate image activated, now rebooting.</p> <p>Firmware Update</p>

Firmware>load 192.168.2.100 SMBStaX.dat
Downloaded "SMBStaX.dat", 3415213 bytes
Master initiated software updating starting
Waiting for firmware update to complete

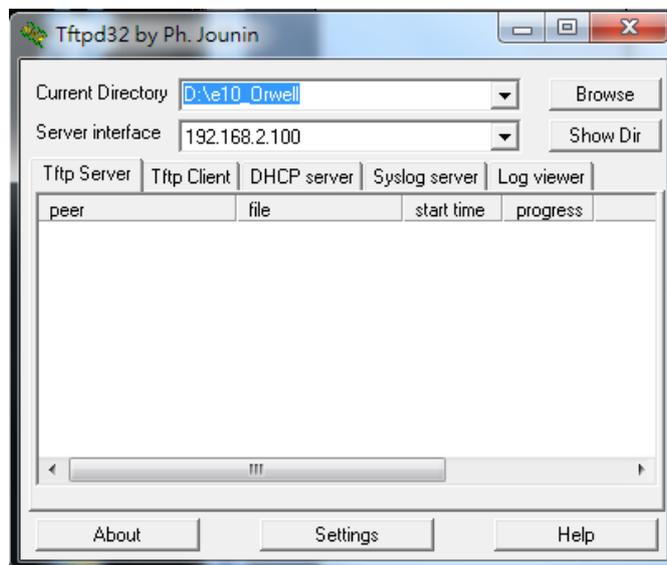

Starting flash update - do not power off device!

Erasing image...

Programming image...

Note 1:

The switch process the firmware upgrading through TFTP protocol. When running firmware upgrading, please open the TFTP tool as TFTP server for the switch.

For example: TFTPd32 is a freeware TFTP server, you can download it from the internet. Browse the directory of the firmware file and select correct server interface.

If you failed to upload file, remember to shut down the firewall of your computer. The process may be terminated by your firewall.

Note 2: While firmware uploading process is started, please don't shutdown the switch!

Chapter 5:

Web Configuration - Monitor, **Diagnostic, Maintenance**

In Web Configuration - Monitor, Diagnostic, Maintenance:

The following chapter will guide you to this switch's configuration webpage regarding to Monitor, Diagnostic, and Maintenance options.

Monitor

Monitor / System

Monitor / System / Information

The switch system information is provided here.

System Information

Auto-refresh [Refresh](#)

System	
Contact Name	Location
Hardware	
MAC Address	00-03-ce-21-85-aa
Chip ID	VSCd7434
Time	
System Date	1970-01-01T14:57:07+00:00
System Uptime	0d 14:57:07
Software	
Software Version	PoE (standalone) dev-build by root@localhost.localdomain 2014-12-18T16:09:44+08:00 Config:smb_switch_jr1_cu48_ref.mk
Software Date	2014-12-18T16:09:44+08:00
Acknowledgments	Details

Contact

The system contact configured in Configuration | System | Information | System Contact.

Name

The system name configured in Configuration | System | Information | System Name.

Location

The system location configured in Configuration | System | Information | System Location.

MAC Address

The MAC Address of this switch.

Chip ID

The Chip ID of this switch.

System Date

The current (GMT) system time and date. The system time is obtained through the configured NTP Server, if any.

System Uptime

The period of time the device has been operational.

Software Version

The software version of this switch.

Software Date

The date when the switch software was produced.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page; any changes made locally will be undone.

CPU Load

This page displays the CPU load, using an SVG graph.

The load is measured as averaged over the last 100ms, 1sec and 10 seconds intervals. The last 120 samples are graphed, and the last numbers are displayed as text as well.

In order to display the SVG graph, your browser must support the SVG format. Consult the [SVG Wiki](#) for more information on browser support. Specifically, at the time of writing, Microsoft Internet Explorer will need to have a plugin installed to support SVG.



Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

System Log Information

The switch system log information is provided here.

System Log Information Auto-refresh Refresh Clear |<< << >> >>|

Level All
 Clear Level All

The total number of entries is 8 for the given level.

Start from ID 1 with 20 entries per page.

ID	Level	Time	Message
1	Info	1970-01-01T00:00:05+00:00	Switch just made a cold boot.
2	Info	1970-01-01T00:00:08+00:00	Link up on port 16
3	Info	1970-01-01T00:31:59+00:00	Link down on port 16
4	Info	1970-01-01T00:32:02+00:00	Link up on port 16
5	Info	1970-01-01T00:32:06+00:00	Link down on port 16
6	Info	1970-01-01T14:29:39+00:00	Link up on port 16
7	Info	1970-01-01T14:30:24+00:00	Link down on port 16
8	Info	1970-01-01T14:30:29+00:00	Link up on port 16

ID

The ID (≥ 1) of the system log entry.

System Log Information

Level All
 Clear Level Info
 Warning
 Error
 All

The total number of entries is 8 for the given level.

Start from ID 1 with 20 entries per page.

Level

The level of the system log entry. The following level types are supported:

Info: Information level of the system log.

Warning: Warning level of the system log.

Error: Error level of the system log.

All: All levels.

Time

The time of the system log entry.

Message

The message of the system log entry.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Updates the system log entries, starting from the current entry ID.

Clear: Flushes all system log entries.

|<<: Updates the system log entries, starting from the first available entry ID.

<<: Updates the system log entries, ending at the last entry currently displayed.

>>: Updates the system log entries, starting from the last entry currently displayed.

>>|: Updates the system log entries, ending at the last available entry ID.

System / Detailed Log

System's detailed log information is provided here.

Detailed System Log Information

Refresh |<< << >> >>|

ID | 1 |

Message

Level	Info
Time	1970-01-01T00:00:05+00:00
Message	Switch just made a cold boot.

ID

The ID (≥ 1) of the system log entry.

Message

The detailed message of the system log entry.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Updates the system log entries, starting from the current entry ID.

Clear: Flushes all system log entries.

|<<: Updates the system log entries, starting from the first available entry ID.

<<: Updates the system log entries, ending at the last entry currently displayed.


>>: Updates the system log entries, starting from the last entry currently displayed.

>>|: Updates the system log entries, ending at the last available entry ID.

Monitor / Port State

Port State

This page provides an overview of the current switch port states.

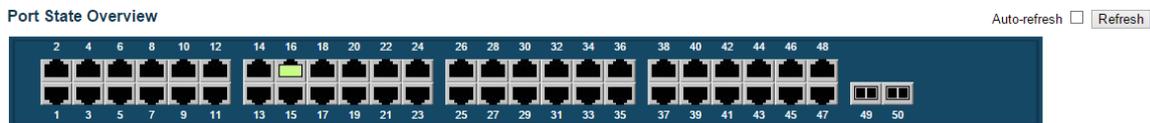

The port states are illustrated as follows:

RJ45 ports			
SFP ports			
State	Disabled	Down	Link

Buttons

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Refresh: Click to refresh the page; any changes made locally will be undone.

Traffic Overview

This page provides an overview of general traffic statistics for all switch ports.

The displayed counters are:

Port Statistics Overview for Switch 1

Auto-refresh Refresh Clear

Port	Packets		Bytes		Errors		Drops		Filtered
	Received	Transmitted	Received	Transmitted	Received	Transmitted	Received	Transmitted	Received
1	0	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0	0
9	0	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0	0
13	0	0	0	0	0	0	0	0	0
14	0	0	0	0	0	0	0	0	0
15	0	0	0	0	0	0	0	0	0
16	3377	2903	409983	412258	2	0	341	0	341
17	0	0	0	0	0	0	0	0	0
18	0	0	0	0	0	0	0	0	0
19	0	0	0	0	0	0	0	0	0
20	0	0	0	0	0	0	0	0	0
21	0	0	0	0	0	0	0	0	0
22	0	0	0	0	0	0	0	0	0
23	0	0	0	0	0	0	0	0	0
24	0	0	0	0	0	0	0	0	0
25	0	0	0	0	0	0	0	0	0
26	0	0	0	0	0	0	0	0	0
27	0	0	0	0	0	0	0	0	0
28	0	0	0	0	0	0	0	0	0
29	0	0	0	0	0	0	0	0	0
30	0	0	0	0	0	0	0	0	0
31	0	0	0	0	0	0	0	0	0
32	0	0	0	0	0	0	0	0	0
33	0	0	0	0	0	0	0	0	0
34	0	0	0	0	0	0	0	0	0
35	0	0	0	0	0	0	0	0	0
36	0	0	0	0	0	0	0	0	0
37	0	0	0	0	0	0	0	0	0
38	0	0	0	0	0	0	0	0	0
39	0	0	0	0	0	0	0	0	0
40	0	0	0	0	0	0	0	0	0
41	0	0	0	0	0	0	0	0	0
42	0	0	0	0	0	0	0	0	0
43	0	0	0	0	0	0	0	0	0
44	0	0	0	0	0	0	0	0	0
45	0	0	0	0	0	0	0	0	0
46	0	0	0	0	0	0	0	0	0
47	0	0	0	0	0	0	0	0	0
48	0	0	0	0	0	0	0	0	0
49	0	0	0	0	0	0	0	0	0
50	1	0	752	0	1	0	1	0	1

Port

The logical port for the settings contained in the same row.

Packets

The number of received and transmitted packets per port.

Bytes

The number of received and transmitted bytes per port.

Errors

The number of frames received in error and the number of incomplete transmissions per port.

Drops

The number of frames discarded due to ingress or egress congestion.

Filtered

The number of received frames filtered by the forwarding process.

Buttons

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Refresh: Click to refresh the page; any changes made locally will be undone.

QoS Statistics

This page provides statistics for the different queues for all switch ports. The displayed counters are:

Queuing Counters for Switch 1 Auto-refresh Refresh Clear

Port	Q0		Q1		Q2		Q3		Q4		Q5		Q6		Q7	
	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx	Rx	Tx
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
14	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
15	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
16	3078	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2967
17	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
18	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
19	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
20	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
21	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
22	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
23	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
24	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
26	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
27	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
28	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
29	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
30	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
31	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
32	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
33	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
34	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
35	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
36	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
37	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
38	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
39	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
40	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
41	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
42	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
43	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
44	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
45	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
46	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
47	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
48	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
49	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Port

The logical port for the settings contained in the same row.

Qn

There are 8 QoS queues per port. Q0 is the lowest priority queue.

Rx/Tx

The number of received and transmitted packets per queue.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for all ports.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

QCL Status

This page shows the QCL status by different QCL users. Each row describes the QCE that is defined. It is a conflict if a specific QCE is not applied to the hardware due to hardware limitations. The maximum number of QCEs is 256 on each switch.

QoS Control List Status for Switch 1

User	QCE#	Frame Type	Port	Action			Conflict
				Class	DPL	DSCP	
No entries							

User

Indicates the QCL user.

QCE#

Indicates the index of QCE.

Frame Type

Indicates the type of frame to look for incoming frames. Possible frame types are:

Any: The QCE will match all frame type.

Ethernet: Only Ethernet frames (with Ether Type 0x600-0xFFFF) are allowed.

LLC: Only (LLC) frames are allowed.

SNAP: Only (SNAP) frames are allowed.

IPv4: The QCE will match only IPV4 frames.

IPv6: The QCE will match only IPV6 frames.

Port

Indicates the list of ports configured with the QCE.

Action

Indicates the classification action taken on ingress frame if parameters configured are matched with the frame's content.

There are three action fields: Class, DPL and DSCP.

Class: Classified QoS class; if a frame matches the QCE it will be put in the queue.

DPL: Drop Precedence Level; if a frame matches the QCE then DP level will set to value displayed under DPL column.

DSCP: If a frame matches the QCE then DSCP will be classified with the value displayed under DSCP column.

Conflict

Displays Conflict status of QCL entries. As H/W resources are shared by multiple applications. It may happen that resources required to add a QCE may not be available, in that case it shows conflict status as 'Yes', otherwise it is always 'No'. Please note that conflict can be resolved by releasing the H/W resources required to add QCL entry on pressing 'Resolve Conflict' button.



Buttons

: Select the QCL status from this drop down list.

Auto-refresh: Check this box to refresh the page automatically. Automatic refresh occurs at regular intervals.

Resolve Conflict: Click to release the resources required to add QCL entry, in case conflict status for any QCL entry is 'yes'.

Refresh: Click to refresh the page; any changes made locally will be undone

Detailed Port Statistics

This page provides detailed traffic statistics for a specific switch port. Use the port select box to select which switch port details to display.

The displayed counters are the totals for receive and transmit, the size counters for receive and transmit, and the error counters for receive and transmit.

Receive Total		Transmit Total	
Rx Packets	0	Tx Packets	0
Rx Octets	0	Tx Octets	0
Rx Unicast	0	Tx Unicast	0
Rx Multicast	0	Tx Multicast	0
Rx Broadcast	0	Tx Broadcast	0
Rx Pause	0	Tx Pause	0
Receive Size Counters		Transmit Size Counters	
Rx 64 Bytes	0	Tx 64 Bytes	0
Rx 65-127 Bytes	0	Tx 65-127 Bytes	0
Rx 128-255 Bytes	0	Tx 128-255 Bytes	0
Rx 256-511 Bytes	0	Tx 256-511 Bytes	0
Rx 512-1023 Bytes	0	Tx 512-1023 Bytes	0
Rx 1024-1526 Bytes	0	Tx 1024-1526 Bytes	0
Rx 1527- Bytes	0	Tx 1527- Bytes	0
Receive Queue Counters		Transmit Queue Counters	
Rx Q0	0	Tx Q0	0
Rx Q1	0	Tx Q1	0
Rx Q2	0	Tx Q2	0
Rx Q3	0	Tx Q3	0
Rx Q4	0	Tx Q4	0
Rx Q5	0	Tx Q5	0
Rx Q6	0	Tx Q6	0
Rx Q7	0	Tx Q7	0
Receive Error Counters		Transmit Error Counters	
Rx Drops	0	Tx Drops	0
Rx CRC/Alignment	0	Tx Late/Exc. Coll.	0
Rx Undersize	0		
Rx Oversize	0		
Rx Fragments	0		
Rx Jabber	0		
Rx Filtered	0		

Receive Total and Transmit Total

Rx and Tx Packets

The number of received and transmitted (good and bad) packets.

Rx and Tx Octets

The number of received and transmitted (good and bad) bytes. Includes FCS, but excludes framing bits.

Rx and Tx Unicast

The number of received and transmitted (good and bad) unicast packets.

Rx and Tx Multicast

The number of received and transmitted (good and bad) multicast packets.

Rx and Tx Broadcast

The number of received and transmitted (good and bad) broadcast packets.

Rx and Tx Pause

A count of the MAC Control frames received or transmitted on this port that have an opcode indicating a PAUSE operation.

Receive and Transmit Size Counters

The number of received and transmitted (good and bad) packets split into categories based on their respective frame sizes.

Receive and Transmit Queue Counters

The number of received and transmitted packets per input and output queue.

Receive Error Counters

Rx Drops

The number of frames dropped due to lack of receive buffers or egress congestion.

Rx CRC/Alignment

The number of frames received with CRC or alignment errors.

Rx Undersize

The number of short 1 frames received with valid CRC.

Rx Oversize

The number of long 2 frames received with valid CRC.

Rx Fragments

The number of short 1 frames received with invalid CRC.

Rx Jabber

The number of long 2 frames received with invalid CRC.

Rx Filtered

The number of received frames filtered by the forwarding process.

Note 1: Short frames are frames that are smaller than 64 bytes.

Note 2: Long frames are frames that are longer than the configured maximum frame length for this port.

Transmit Error Counters

Tx Drops

The number of frames dropped due to output buffer congestion.

Tx Late/Exc. Coll.

The number of frames dropped due to excessive or late collisions.

Buttons

The port select box determines which port is affected by clicking the buttons.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for the selected port.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Monitor / Security

Security / Access Management Statistics

This page provides statistics for access management.

Access Management Statistics Auto-refresh Refresh Clear

Interface	Received Packets	Allowed Packets	Discarded Packets
HTTP	0	0	0
HTTPS	0	0	0
SNMP	0	0	0
TELNET	0	0	0
SSH	0	0	0

Interface

The interface type through which the remote host can access the switch.

Received Packets

Number of received packets from the interface when access management mode is enabled.

Allowed Packets

Number of allowed packets from the interface when access management mode is enabled.

Discarded Packets

Number of discarded packets from the interface when access management mode is enabled.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clear all statistics.

Security / Network

Port Security Switch Status

This page shows the Port Security status. Port Security is a module with no direct configuration. Configuration comes indirectly from other modules - the user modules. When a user module has enabled port security on a port, the port is set-up for software-based learning. In this mode, frames from unknown MAC addresses are passed on to the port security module, which in turn asks all user modules whether to allow this new MAC address to forward or block it. For a MAC address to be set in the forwarding state, all enabled user modules must unanimously agree on allowing the MAC address to forward. If only one chooses to block it, it will be blocked until that user module decides otherwise.

The status page is divided into two sections - one with a legend of user modules and one with the actual port status.

Port Security Switch Status Auto-refresh

User Module Legend

User Module Name	Abbr
Limit Control	L
802.1X	8
DHCP Snooping	D
Voice VLAN	V

Port Status for Switch 1

Port	Users	State	MAC Count	
			Current	Limit
1	----	Disabled	-	-
2	----	Disabled	-	-
3	----	Disabled	-	-
4	----	Disabled	-	-
5	----	Disabled	-	-
6	----	Disabled	-	-
7	----	Disabled	-	-
8	----	Disabled	-	-
9	----	Disabled	-	-
10	----	Disabled	-	-
11	----	Disabled	-	-
12	----	Disabled	-	-

User Module Legend

The legend shows all user modules that may request Port Security services.

User Module Name

The full name of a module that may request Port Security services.

Abbr

A one-letter abbreviation of the user module. This is used in the Users column in the port status table.

Port Status

The table has one row for each port on the switch and a number of columns, which are:

Port

The port number for which the status applies. Click the port number to see the status for this particular port.

Users

Each of the user modules has a column that shows whether that module has enabled Port Security or not. A '-' means that the corresponding user module is not enabled, whereas a letter indicates that the user module abbreviated by that letter (see Abbr) has enabled port security.

State

Shows the current state of the port. It can take one of four values:

Disabled: No user modules are currently using the Port Security service.

Ready: The Port Security service is in use by at least one user module, and is awaiting frames from unknown MAC addresses to arrive.

Limit Reached: The Port Security service is enabled by at least the Limit Control user module, and that module has indicated that the limit is reached and no more MAC addresses should be taken in.

Shutdown: The Port Security service is enabled by at least the Limit Control user module, and that module has indicated that the limit is exceeded. No MAC addresses can be learned on the port until it is administratively re-opened on the Limit Control configuration Web-page.

MAC Count (Current, Limit)

The two columns indicate the number of currently learned MAC addresses (forwarding as well as blocked) and the maximum number of MAC addresses that can be learned on the port, respectively.

If no user modules are enabled on the port, the Current column will show a dash (-).

If the Limit Control user module is not enabled on the port, the Limit column will show a dash (-).

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Port Security Port Status

This page shows the MAC addresses secured by the Port Security module. Port Security is a module with no direct configuration. Configuration comes indirectly from other modules - the user modules. When a user module has enabled port security on a port, the port is set-up for software-based learning. In this mode, frames from unknown MAC addresses are passed on to the port security module, which in turn asks all user modules whether to allow this new MAC address to forward or block it. For a MAC address to be set in the forwarding state, all enabled user modules must unanimously agree on allowing the MAC address to forward. If only one chooses to block it, it will be blocked until that user module decides otherwise.

MAC Address & VLAN ID

The MAC address and VLAN ID that is seen on this port. If no MAC addresses are learned, a single row stating "No MAC addresses attached" is displayed.

State

Indicates whether the corresponding MAC address is blocked or forwarding. In the blocked state, it will not be allowed to transmit or receive traffic.

Time of Addition

Shows the date and time when this MAC address was first seen on the port.

Age/Hold

If at least one user module has decided to block this MAC address, it will stay in the blocked state until the hold time (measured in seconds) expires. If all user modules have decided to allow this MAC address to forward, and aging is enabled, the Port Security module will periodically check that this MAC address still forwards traffic. If the age period (measured in seconds) expires and no frames have been seen, the MAC address will be removed from the MAC table. Otherwise a new age period will begin.

If aging is disabled or a user module has decided to hold the MAC address indefinitely, a dash (-) will be shown.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Security / Network / NAS

This page provides an overview of the current NAS port states.

Network Access Server Switch Status

Auto-refresh Refresh

Port	Admin State	Port State	Last Source	Last ID	QoS Class	Port VLAN ID
1	Force Authorized	Globally Disabled				
2	Force Authorized	Globally Disabled				
3	Force Authorized	Globally Disabled				
4	Force Authorized	Globally Disabled				
5	Force Authorized	Globally Disabled				
6	Force Authorized	Globally Disabled				
7	Force Authorized	Globally Disabled				
8	Force Authorized	Globally Disabled				
9	Force Authorized	Globally Disabled				
10	Force Authorized	Globally Disabled				
11	Force Authorized	Globally Disabled				
12	Force Authorized	Globally Disabled				
13	Force Authorized	Globally Disabled				
14	Force Authorized	Globally Disabled				
15	Force Authorized	Globally Disabled				
16	Force Authorized	Globally Disabled				
17	Force Authorized	Globally Disabled				
18	Force Authorized	Globally Disabled				

Port

The switch port number. Click to navigate to detailed NAS statistics for this port.

Admin State

The port's current administrative state. Refer to NAS Admin State for a description of possible values.

Port State

The current state of the port. Refer to NAS Port State for a description of the individual states.

Last Source

The source MAC address carried in the most recently received EAPOL frame for EAPOL-based authentication, and the most recently received frame from a new client for MAC-based authentication.

Last ID

The user name (supplicant identity) carried in the most recently received Response Identity EAPOL frame for EAPOL-based authentication, and the source MAC address from the most recently received frame from a new client for MAC-based authentication.

QoS Class

QoS Class assigned to the port by the RADIUS server if enabled.

Port VLAN ID

The VLAN ID that NAS has put the port in. The field is blank, if the Port VLAN ID is not overridden by NAS.

If the VLAN ID is assigned by the RADIUS server, "(RADIUS-assigned)" is appended to the VLAN ID. Read more about RADIUS-assigned VLANs [here](#).

If the port is moved to the Guest VLAN, "(Guest)" is appended to the VLAN ID. Read more about Guest VLANs [here](#).

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Port State

Admin State

The port's current administrative state. Refer to NAS Admin State for a description of possible values.

Port State

The current state of the port. Refer to NAS Port state for a description of the individual states.

QoS Class

The QoS class assigned by the RADIUS server. The field is blank if no QoS class is assigned.

Port VLAN ID

The VLAN ID that NAS has put the port in. The field is blank, if the Port VLAN ID is not overridden by NAS.

If the VLAN ID is assigned by the RADIUS server, "(RADIUS-assigned)" is appended to the VLAN ID. Read more about RADIUS-assigned VLANs here.

If the port is moved to the Guest VLAN, "(Guest)" is appended to the VLAN ID. Read more about Guest VLANs here.

Port Counters

EAPOL Counters

These supplicant frame counters are available for the following administrative states:

- Force Authorized
- Force Unauthorized
- Port-based 802.1X
- Single 802.1X
- Multi 802.1X

EAPOL Counters			
Direction	Name	IEEE Name	Description
Rx	Total	dot1xAuthEapolFramesRx	The number of valid EAPOL frames of any type that have been received by the switch.
Rx	Response ID	dot1xAuthEapolRespIdFramesRx	The number of valid EAPOL Response Identity frames that have been received by the switch.
Rx	Responses	dot1xAuthEapolRespFramesRx	The number of valid EAPOL response frames (other than Response Identity frames) that have been received by the switch.
Rx	Start	dot1xAuthEapolStartFramesRx	The number of EAPOL Start frames that have been received by the switch.
Rx	Logoff	dot1xAuthEapolLogoffFramesRx	The number of valid EAPOL Logoff frames that have been received by the switch.
Rx	Invalid	dot1xAuthInvalidEapolFramesRx	The number of EAPOL frames that have been received by the switch in which the frame type is not

Chapter 5: Monitor, Diagnostic, Maintenance

Monitor, Diagnostic, Maintenance

	Type		recognized.
Rx	Invalid Length	dot1xAuthEapLengthErrorFramesRx	The number of EAPOL frames that have been received by the switch in which the Packet Body Length field is invalid.
Tx	Total	dot1xAuthEapolFramesTx	The number of EAPOL frames of any type that have been transmitted by the switch.
Tx	Request ID	dot1xAuthEapolReqIdFramesTx	The number of EAPOL Request Identity frames that have been transmitted by the switch.
Tx	Requests	dot1xAuthEapolReqFramesTx	The number of valid EAPOL Request frames (other than Request Identity frames) that have been transmitted by the switch.

Backend Server Counters

These backend (RADIUS) frame counters are available for the following administrative states:

- Port-based 802.1X
- Single 802.1X
- Multi 802.1X
- MAC-based Auth.

Backend Server Counters			
Direction	Name	IEEE Name	Description
Rx	Access Challenges	dot1xAuthBackendAccessChallenges	<p>802.1X-based:</p> <p>Counts the number of times that the switch receives the first request from the backend server following the first response from the supplicant.</p> <p>Indicates that the backend server has communication with the switch.</p> <p>MAC-based:</p> <p>Counts all Access Challenges received from the backend server for this port (left-most table) or client</p>

Chapter 5: Monitor, Diagnostic, Maintenance

Monitor, Diagnostic, Maintenance

			(right-most table).
Rx	Other Requests	dot1xAuthBackendOtherRequestsToSupplicant	<p>802.1X-based:</p> <p>Counts the number of times that the switch sends an EAP Request packet following the first to the supplicant. Indicates that the backend server chose an EAP-method.</p> <p>MAC-based:</p> <p>Not applicable.</p>
Rx	Auth. Successes	dot1xAuthBackendAuthSuccesses	<p>802.1X- and MAC-based:</p> <p>Counts the number of times that the switch receives a success indication. Indicates that the supplicant/client has successfully authenticated to the backend server.</p>
Rx	Auth. Failures	dot1xAuthBackendAuthFails	<p>802.1X- and MAC-based:</p> <p>Counts the number of times that the switch receives a failure message. This indicates that the supplicant/client has not authenticated to the backend server.</p>
Tx	Responses	dot1xAuthBackendResponses	<p>802.1X-based:</p> <p>Counts the number of times that the switch attempts to send a supplicant's first response packet to the backend server. Indicates the switch attempted communication with the backend server. Possible retransmissions are not counted.</p> <p>MAC-based:</p> <p>Counts all the backend server packets sent from the switch towards the backend server for a given port (left-most table) or client (right-most</p>

	table). Possible retransmissions are not counted.
--	---------------------------------------------------

Last Supplicant/Client Info

Information about the last supplicant/client that attempted to authenticate. This information is available for the following administrative states:

- Port-based 802.1X
- Single 802.1X
- Multi 802.1X
- MAC-based Auth.

Last Supplicant/Client Info		
Name	IEEE Name	Description
MAC Address	dot1xAuthLastEapolFrameSource	The MAC address of the last supplicant/client.
VLAN ID	-	The VLAN ID on which the last frame from the last supplicant/client was received.
Version	dot1xAuthLastEapolFrameVersion	<p>802.1X-based: The protocol version number carried in the most recently received EAPOL frame.</p> <p>MAC-based: Not applicable.</p>
Identity	-	<p>802.1X-based: The user name (supplicant identity) carried in the most recently received Response Identity EAPOL frame.</p> <p>MAC-based: Not applicable.</p>

Selected Counters

Selected Counters

The Selected Counters table is visible when the port is in one of the following administrative states:

- Multi 802.1X
- MAC-based Auth.

The table is identical to and is placed next to the Port Counters table, and will be empty if no MAC address is currently selected. To populate the table, select one of the attached MAC Addresses from the table below.

Attached MAC Addresses

Identity

Shows the identity of the supplicant, as received in the Response Identity EAPOL frame.

Clicking the link causes the supplicant's EAPOL and Backend Server counters to be shown in the Selected Counters table. If no supplicants are attached, it shows No supplicants attached.

This column is not available for MAC-based Auth.

MAC Address

For Multi 802.1X, this column holds the MAC address of the attached supplicant. For MAC-based Auth., this column holds the MAC address of the attached client. Clicking the link causes the client's Backend Server counters to be shown in the Selected Counters table. If no clients are attached, it shows No clients attached.

VLAN ID

This column holds the VLAN ID that the corresponding client is currently secured through the Port Security module.

State

The client can either be authenticated or unauthenticated. In the authenticated state, it is allowed to forward frames on the port, and in the unauthenticated state, it is blocked. As long as the backend server hasn't successfully authenticated the client, it is unauthenticated. If an authentication fails for one or the other reason, the client will remain in the unauthenticated state for Hold Time seconds.

Last Authentication

Shows the date and time of the last authentication of the client (successful as well as unsuccessful).

Buttons

The port select box determines which port is affected when clicking the buttons.

Auto-refresh

Check this box to enable an automatic refresh of the page at regular intervals.

Click to refresh the page immediately.

This button is available in the following modes:

- Force Authorized
- Force Unauthorized
- Port-based 802.1X
- Single 802.1X

Click to clear the counters for the selected port.

This button is available in the following modes:

- Multi 802.1X
- MAC-based Auth.X

Click to clear both the port counters and all of the attached client's counters. The "Last Client" will not be cleared, however.

This button is available in the following modes:

- Multi 802.1X
- MAC-based Auth.X

Click to clear only the currently selected client's counters.

Network / ACL Status

This page shows the ACL status by different ACL users. Each row describes the ACE that is defined. It is a conflict if a specific ACE is not applied to the hardware due to hardware limitations. The maximum number of ACEs is 256 on each switch.

ACL Status Combined Auto-refresh Refresh

User	Ingress Port	Frame Type	Action	Rate Limiter	Port Redirect	CPU	CPU Once	Counter	Conflict
No entries									

User

Indicates the ACL user.

Ingress Port

Indicates the ingress port of the ACE. Possible values are:

All: The ACE will match all ingress port.

Port: The ACE will match a specific ingress port.

Frame Type

Indicates the frame type of the ACE. Possible values are:

Any: The ACE will match any frame type.

EType: The ACE will match Ethernet Type frames. Note that an Ethernet Type based ACE will not get matched by IP and ARP frames.

ARP: The ACE will match ARP/RARP frames.

IPv4: The ACE will match all IPv4 frames.

IPv4/ICMP: The ACE will match IPv4 frames with ICMP protocol.

IPv4/UDP: The ACE will match IPv4 frames with UDP protocol.

IPv4/TCP: The ACE will match IPv4 frames with TCP protocol.

IPv4/Other: The ACE will match IPv4 frames, which are not ICMP/UDP/TCP.

IPv6: The ACE will match all IPv6 standard frames.

Action

Indicates the forwarding action of the ACE.

Permit: Frames matching the ACE may be forwarded and learned.

Deny: Frames matching the ACE are dropped.

Rate Limiter

Indicates the rate limiter number of the ACE. The allowed range is 1 to 16. When Disabled is displayed, the rate limiter operation is disabled.

Port Copy

Indicates the port copy operation of the ACE. Frames matching the ACE are copied to the port number. The allowed values are Disabled or a specific port number. When Disabled is displayed, the port copy operation is disabled.

Mirror

Specify the mirror operation of this port. The allowed values are:

Enabled: Frames received on the port are mirrored.

Disabled: Frames received on the port are not mirrored.

The default value is "Disabled".

CPU

Forward packet that matched the specific ACE to CPU.

CPU Once

Forward first packet that matched the specific ACE to CPU.

Counter

The counter indicates the number of times the ACE was hit by a frame.

Conflict

Indicates the hardware status of the specific ACE. The specific ACE is not applied to the hardware due to hardware limitations.

Buttons

: Select the ACL status from this drop down list.

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

DHCP Snooping Statistics

This page provides statistics for DHCP snooping. The statistics show only packet counters when DHCP snooping mode is enabled and relay mode is disabled. And it doesn't count the DHCP packets for DHCP client.

DHCP Snooping Port Statistics for Switch 1 Port 1 Port 1 Auto-refresh

Receive Packets		Transmit Packets	
Rx Discover	0	Tx Discover	0
Rx Offer	0	Tx Offer	0
Rx Request	0	Tx Request	0
Rx Decline	0	Tx Decline	0
Rx ACK	0	Tx ACK	0
Rx NAK	0	Tx NAK	0
Rx Release	0	Tx Release	0
Rx Inform	0	Tx Inform	0
Rx Lease Query	0	Tx Lease Query	0
Rx Lease Unassigned	0	Tx Lease Unassigned	0
Rx Lease Unknown	0	Tx Lease Unknown	0
Rx Lease Active	0	Tx Lease Active	0

Receive and Transmit Packets

Rx and Tx Discover

The number of discover (option 53 with value 1) packets received and transmitted.

Rx and Tx Offer

The number of offer (option 53 with value 2) packets received and transmitted.

Rx and Tx Request

The number of request (option 53 with value 3) packets received and transmitted.

Rx and Tx Decline

The number of decline (option 53 with value 4) packets received and transmitted.

Rx and Tx ACK

The number of ACK (option 53 with value 5) packets received and transmitted.

Rx and Tx NAK

The number of NAK (option 53 with value 6) packets received and transmitted.

Rx and Tx Release

The number of release (option 53 with value 7) packets received and transmitted.

Rx and Tx Inform

The number of inform (option 53 with value 8) packets received and transmitted.

Rx and Tx Lease Query

The number of lease query (option 53 with value 10) packets received and transmitted.

Rx and Tx Lease Unassigned

The number of lease unassigned (option 53 with value 11) packets received and transmitted.

Rx and Tx Lease Unknown

The number of lease unknown (option 53 with value 12) packets received and transmitted.

Rx and Tx Lease Active

The number of lease active (option 53 with value 13) packets received and transmitted.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for the selected port.

DHCP Relay Statistics

This page provides statistics for DHCP relay.

DHCP Relay Statistics Auto-refresh Refresh Clear

Server Statistics

Transmit to Server	Transmit Error	Receive from Server	Receive Missing Agent Option	Receive Missing Circuit ID	Receive Missing Remote ID	Receive Bad Circuit ID	Receive Bad Remote ID
0	0	0	0	0	0	0	0

Client Statistics

Transmit to Client	Transmit Error	Receive from Client	Receive Agent Option	Replace Agent Option	Keep Agent Option	Drop Agent Option
0	0	0	0	0	0	0

Server Statistics

Transmit to Server

The number of packets that are relayed from client to server.

Transmit Error

The number of packets that resulted in errors while being sent to clients.

Receive from Server

The number of packets received from server.

Receive Missing Agent Option

The number of packets received without agent information options.

Receive Missing Circuit ID

The number of packets received with the Circuit ID option missing.

Receive Missing Remote ID

The number of packets received with the Remote ID option missing.

Receive Bad Circuit ID

The number of packets whose Circuit ID option did not match known circuit ID.

Receive Bad Remote ID

The number of packets whose Remote ID option did not match known Remote ID.

Client Statistics

Transmit to Client

The number of relayed packets from server to client.

Transmit Error

The number of packets that resulted in error while being sent to servers.

Receive from Client

The number of received packets from server.

Receive Agent Option

The number of received packets with relay agent information option.

Replace Agent Option

The number of packets which were replaced with relay agent information option.

Keep Agent Option

The number of packets whose relay agent information was retained.

Drop Agent Option

The number of packets that were dropped which were received with relay agent information.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears statistics.

Network / Dynamic ARP Inspection Table

Entries in the Dynamic ARP Inspection Table are shown on this page. The Dynamic ARP Inspection Table contains up to 1024 entries, and is sorted first by port, then by VLAN ID, then by MAC address, and then by IP address.

Navigating the ARP Inspection Table

Each page shows up to 99 entries from the Dynamic ARP Inspection table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the Dynamic ARP Inspection Table.

The "Start from port address", "VLAN", "MAC address" and "IP address" input fields allow the user to select the starting point in the Dynamic ARP Inspection Table. Clicking the button will update the displayed table starting from that or the closest next Dynamic ARP Inspection Table match. In addition, the two input fields will - upon a button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

ARP Inspection Table Columns

Port

Switch Port Number for which the entries are displayed.

LAN ID

VLAN-ID in which the ARP traffic is permitted.

MAC Address

User MAC address of the entry.

IP Address

User IP address of the entry.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Flushes all dynamic entries.

/<<: Updates the table starting from the first entry in the Dynamic ARP Inspection Tables.

>>: Updates the table, starting with the entry after the last entry currently displayed.

Network / Dynamic IP Source Guard Table

Entries in the Dynamic IP Source Guard Table are shown on this page. The Dynamic IP Source Guard Table is sorted first by port, then by VLAN ID, then by IP address, and then by MAC address.

Dynamic IP Source Guard Table for Switch 1 Auto-refresh Refresh |<< >>

Start from , VLAN and IP address with entries per page.

Port	VLAN ID	IP Address	MAC Address
No more entries			

Navigating the IP Source Guard Table

Each page shows up to 99 entries from the Dynamic IP Source Guard table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the Dynamic IP Source Guard Table.

The "Start from port address", "VLAN" and "IP address" input fields allow the user to select the starting point in the Dynamic IP Source Guard Table. Clicking the button will update the displayed table starting from that or the closest next Dynamic IP Source Guard Table match. In addition, the two input fields will - upon a button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

IP Source Guard Table Columns

Port

Switch Port Number for which the entries are displayed.

VLAN ID

VLAN-ID in which the IP traffic is permitted.

IP Address

User IP address of the entry.

MAC Address

Source MAC address.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Flushes all dynamic entries.

/<<: Updates the table starting from the first entry in the Dynamic ARP Inspection Tables.

>>: Updates the table, starting with the entry after the last entry currently displayed.

Security / AAA

This page provides an overview of the status of the RADIUS servers configurable on the Authentication configuration page.

RADIUS Authentication Server Status Overview Auto-refresh [Refresh](#)

#	IP Address	Status
1	0.0.0.0:1812	Disabled
2	0.0.0.0:1812	Disabled
3	0.0.0.0:1812	Disabled
4	0.0.0.0:1812	Disabled
5	0.0.0.0:1812	Disabled

RADIUS Accounting Server Status Overview

#	IP Address	Status
1	0.0.0.0:1813	Disabled
2	0.0.0.0:1813	Disabled
3	0.0.0.0:1813	Disabled
4	0.0.0.0:1813	Disabled
5	0.0.0.0:1813	Disabled

RADIUS Authentication Servers

#

The RADIUS server number. Click to navigate to detailed statistics for this server.

IP Address

The IP address and UDP port number (in <IP Address>:<UDP Port> notation) of this server.

State

The current state of the server. This field takes one of the following values:

Disabled: The server is disabled.

Not Ready: The server is enabled, but IP communication is not yet up and running.

Ready: The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept access attempts.

Dead (X seconds left): Access attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.

RADIUS Accounting Servers

#

The RADIUS server number. Click to navigate to detailed statistics for this server.

IP Address

The IP address and UDP port number (in <IP Address>:<UDP Port> notation) of this server.

State

The current state of the server. This field takes one of the following values:

Disabled: The server is disabled

Not Ready: The server is enabled, but IP communication is not yet up and running.

Ready: The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept accounting attempts.

Dead (X seconds left): Accounting attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

RADIUS Authentication Statistics

This page provides detailed statistics for a particular RADIUS server.

RADIUS Authentication Statistics for Server #1 Server #1 Auto-refresh

Receive Packets		Transmit Packets	
Access Accepts	0	Access Requests	0
Access Rejects	0	Access Retransmissions	0
Access Challenges	0	Pending Requests	0
Malformed Access Responses	0	Timeouts	0
Bad Authenticators	0		
Unknown Types	0		
Packets Dropped	0		
Other Info			
IP Address		0.0.0.0:1812	
State		Disabled	
Round-Trip Time		0 ms	

RADIUS Accounting Statistics for Server #1

Receive Packets		Transmit Packets	
Responses	0	Requests	0
Malformed Responses	0	Retransmissions	0
Bad Authenticators	0	Pending Requests	0
Unknown Types	0	Timeouts	0
Packets Dropped	0		
Other Info			
IP Address		0.0.0.0:1813	
State		Disabled	
Round-Trip Time		0 ms	

RADIUS Authentication Statistics

The statistics map closely to those specified in RFC4668-RADIUS.Authentication Client MIB.

Use the server select box to switch between the backend servers to show details for.

Packet Counters

RADIUS authentication server packet counter. There are seven receive and four transmit counters.

Direction	Name	RFC4668 Name	Description
Rx	Access Accepts	radiusAuthClientExtAccess Accepts	The number of RADIUS Access-Accept packets (valid or invalid) received from the server.
Rx	Access Rejects	radiusAuthClientExtAccess Rejects	The number of RADIUS Access-Reject packets (valid or invalid) received from the server.
Rx	Access Challenges	radiusAuthClientExtAccessChallenges	The number of RADIUS Access-Challenge packets (valid or invalid) received from the server.
Rx	Malformed Access	radiusAuthClientExtMalformedAccessResponse	The number of malformed RADIUS Access-Response packets received from the server.

Chapter 5: Monitor, Diagnostic, Maintenance

Monitor, Diagnostic, Maintenance

	Responses	s	server. Malformed packets include packets with an invalid length. Bad authenticators or Message Authenticator attributes or unknown types are not included as malformed access responses.
Rx	Bad Authenticators	radiusAuthClientExtBadAuthenticators	The number of RADIUS Access-Response packets containing invalid authenticators or Message Authenticator attributes received from the server.
Rx	Unknown Types	radiusAuthClientExtUnknownTypes	The number of RADIUS packets that were received with unknown types from the server on the authentication port and dropped.
Rx	Packets Dropped	Radius Auth Client Ext-Packets Dropped	The number of RADIUS packets that were received from the server on the authentication port and dropped for some other reason.
Tx	Access Requests	Radius AuthClientExtAccessRequests	The number of RADIUS Access-Request packets sent to the server. This does not include retransmissions.
Tx	Access Retransmissions	radiusAuthClientExtAccessRetransmissions	The number of RADIUS Access-Request packets retransmitted to the RADIUS authentication server.
Tx	Pending Requests	radiusAuthClientExtPendingRequests	The number of RADIUS Access-Request packets destined for the server that have not yet timed out or received a response. This variable is incremented when an Access-Request is sent and decremented due to receipt of an Access-Accept, Access-Reject, Access-Challenge, timeout, or retransmission.
Tx	Timeouts	radiusAuthClientExtTimeouts	The number of authentication timeouts to the server. After a timeout, the client may retry to the same server, send to a different server,

or give up. A retry to the same server is counted as a retransmit as well as a timeout. A send to a different server is counted as a Request as well as a timeout.

Other Info

This section contains information about the state of the server and the latest round-trip time.

Name	RFC4668 Name	Description
State	-	Shows the state of the server. It takes one of the following values: Disabled: The selected server is disabled. Not Ready: The server is enabled, but IP communication is not yet up and running. Ready: The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept access attempts. Dead (X seconds left): Access attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.
Round-Trip Time	Radius AuthClientExtRoundTrip Time	The time interval (measured in milliseconds) between the most recent Access-Reply/Access-Challenge and the Access-Request that matched it from the RADIUS authentication server. The granularity of this measurement is 100 ms. A value of 0 ms indicates that there hasn't been round-trip communication with the server yet.

RADIUS Accounting Statistics

The statistics map closely to those specified in RFC4670-RADIUS.Accounting Client MIB.

Use the server select box to switch between the backend servers to show details for.

RADIUS Authentication Statistics for Server #1 Server #1 Auto-refresh

Receive Packets		Transmit Packets	
Access Accepts	0	Access Requests	0
Access Rejects	0	Access Retransmissions	0
Access Challenges	0	Pending Requests	0
Malformed Access Responses	0	Timeouts	0
Bad Authenticators	0		
Unknown Types	0		
Packets Dropped	0		
Other Info			
IP Address		0.0.0.0:1812	
State		Disabled	
Round-Trip Time		0 ms	

RADIUS Accounting Statistics for Server #1

Receive Packets		Transmit Packets	
Responses	0	Requests	0
Malformed Responses	0	Retransmissions	0
Bad Authenticators	0	Pending Requests	0
Unknown Types	0	Timeouts	0
Packets Dropped	0		
Other Info			
IP Address		0.0.0.0:1813	
State		Disabled	
Round-Trip Time		0 ms	

Packet Counters

RADIUS accounting server packet counter. There are five receive and four transmit counters.

Direction	Name	RFC4670 Name	Description
Rx	Responses	radiusAccClientExtResponses	The number of RADIUS packets (valid or invalid) received from the server.
Rx	Malformed Responses	radiusAccClientExtMalformedResponses	The number of malformed RADIUS packets received from the server. Malformed packets include packets with an invalid length. Bad authenticators or unknown types are not included as malformed access responses.
Rx	Bad Authenticators	radiusAcctClientExtBadAuthenticators	The number of RADIUS packets containing invalid authenticators received from the server.
Rx	Unknown Types	radiusAccClientExtUnknownTypes	The number of RADIUS packets of unknown types that were received from the server on

Chapter 5: Monitor, Diagnostic, Maintenance

Monitor, Diagnostic, Maintenance

			the accounting port.
Rx	Packets Dropped	radiusAccClientExtPackets Dropped	The number of RADIUS packets that were received from the server on the accounting port and dropped for some other reason.
Tx	Requests	radiusAccClientExtRequests	The number of RADIUS packets sent to the server. This does not include retransmissions.
Tx	Retransmissions	radiusAccClientExtRetransmissions	The number of RADIUS packets retransmitted to the RADIUS accounting server.
Tx	Pending Requests	radiusAccClientExtPendingRequests	The number of RADIUS packets destined for the server that have not yet timed out or received a response. This variable is incremented when a Request is sent and decremented due to receipt of a Response, timeout, or retransmission.
Tx	Timeouts	radiusAccClientExtTimeouts	The number of accounting timeouts to the server. After a timeout, the client may retry to the same server, send to a different server, or give up. A retry to the same server is counted as a retransmit as well as a timeout. A send to a different server is counted as a Request as well as a timeout.

Other Info

This section contains information about the state of the server and the latest round-trip time.

Name	RFC4670 Name	Description
State	-	Shows the state of the server. It takes one of the following values: Not Ready: Disabled: The selected server is disabled. Not Ready: The server is enabled, but IP communication is not yet

		up and running.
		aReady: The server is enabled, IP communication is up and running, and the RADIUS module is ready to accept accounting attempts.
		Dead (X seconds left): Accounting attempts were made to this server, but it did not reply within the configured timeout. The server has temporarily been disabled, but will get re-enabled when the dead-time expires. The number of seconds left before this occurs is displayed in parentheses. This state is only reachable when more than one server is enabled.
Round-Trip Time	radiusAccClientExtRoundTripTime	The time interval (measured in milliseconds) between the most recent Response and the Request that matched it from the RADIUS accounting server. The granularity of this measurement is 100 ms. A value of 0 ms indicates that there hasn't been round-trip communication with the server yet.

Buttons

The server select box determines which server is affected by clicking the buttons.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for the selected server. The “ Pending Requests” counter will not be cleared by this operations..

Switch / SNMP / RMON

RMON Statistics Overview

This page provides an overview of RMON statistics entries.

RMON Statistics Status Overview Auto-refresh Refresh << >>

Start from Control Index with entries per page.

ID	Data Source (ifindex)	Drop	Octets	Pkts	Broad-cast	Multi-cast	CRC Errors	Under-size	Over-size	Frag.	Jabb.	Coll.	64 Bytes	65 ~ 127	128 ~ 255	256 ~ 511	512 ~ 1023	1024 ~ 1588
No more entries																		

The displayed counters are:

Data Source

The port ID which wants to be monitored.

Drop

The total number of events in which packets were dropped by the probe due to lack of resources.

Octets

The total number of octets of data (including those in bad packets) received on the network.

Pkts

The total number of packets (including bad packets, broadcast packets, and multicast packets) received.

Broad-cast

The total number of good packets received that weredirected to the broadcast address.

Multi-cast

The total number of good packets received that were directed to a multicast address.

CRC Errors

The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets.

Under-size

The total number of packets received that were less than 64 octets.

Over-size

The total number of packets received that were longer than 1518 octets.

Frag.

The number of frames which size is less than 64 octets received with invalid CRC.

Jabb.

The number of frames which size is larger than 64 octets received with invalid CRC.

Coll.

The best estimate of the total number of collisions on this Ethernet segment.

64

The total number of packets (including bad packets) received that were 64 octets in length.

65~127

The total number of packets (including bad packets) received that were between 65 to 127 octets in length.

128~255

The total number of packets (including bad packets) received that were between 128 to 255 octets in length.

256~511

The total number of packets (including bad packets) received that were between 256 to 511 octets in length.

512~1023

The total number of packets (including bad packets) received that were between 512 to 1023 octets in length.

1024~1588

The total number of packets (including bad packets) received that were between 1024 to 1588 octets in length.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

RMON History Overview

This page provides an overview of RMON history entries.

RMON History Overview

Auto-refresh Refresh << >>

Start from Control Index and Sample Index with entries per page.

History Index	Sample Index	Sample Start	Drop	Octets	Pkts	Broad-cast	Multi-cast	CRC Errors	Under-size	Over-size	Frag.	Jabb.	Coll.	Utilization
No more entries														

The displayed fields are:

History Index

Indicates the index of History control entry.

Sample Index

Indicates the index of the data entry associated with the control entry

Sample Start

The total number of events in which packets were dropped by the probe due to lack of resources.

Drops

The total number of events in which packets were dropped by the probe due to lack of resources.

Octets

The total number of octets of data (including those in bad packets) received on the network.

Pkts

The total number of packets (including bad packets, broadcast packets, and multicast packets) received.

Broadcast

The total number of good packets received that were directed to the broadcast address.

Multicast

The total number of good packets received that were directed to a multicast address.

CRC Errors

The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets.

Chapter 5: Monitor, Diagnostic, Maintenance

Monitor, Diagnostic, Maintenance

Undersize

The total number of packets received that were less than 64 octets.

Oversize

The total number of packets received that were longer than 1518 octets.

Frag.

The number of frames which size is less than 64 octets received with invalid CRC.

Jabb.

The number of frames which size is larger than 64 octets received with invalid CRC.

Coll.

The best estimate of the total number of collisions on this Ethernet segment.

Utilization

The best estimate of the mean physical layer network utilization on this interface during this sampling interval, in hundredths of a percent.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

RMON Alarm Overview

This page provides an overview of RMON alarm entries.

The displayed fields are:

RMON Alarm Overview

Auto-refresh Refresh << >>

Start from Control Index 0 with 20 entries per page.

ID	Interval	Variable	Sample Type	Value	Startup Alarm	Rising Threshold	Rising Index	Falling Threshold	Falling Index
No more entries									

ID

Indicates the index of Alarm control entry.

Interval

Indicates the interval in seconds for sampling and comparing the rising and falling threshold.

Variable

Indicates the particular variable to be sampled

Sample Type

The method of sampling the selected variable and calculating the value to be compared against the thresholds, possible sample types are:

Rising Threshold

Rising threshold value.

Rising Index

Rising event index.

Falling Threshold

Falling threshold value.

Falling Index

Falling event index.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

RMON Event Overview

This page provides an overview of RMON event entries.

The displayed fields are:

RMON Event Overview for Switch 1 Auto-refresh Refresh << >>

Start from Control Index and Sample Index with entries per page.

Event Index	LogIndex	LogTime	LogDescription
No more entries			

Event Index

Indicates the index of the event entry.

Log Index

Indicates the index of the log entry.

Log Time

Indicates Event log time

Log Description

Indicates the Event description.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

LACP System Status

System Status

This page provides a status overview for all LACP instances.

LACP System Status

Auto-refresh Refresh

Aggr ID	Partner System ID	Partner Key	Partner Prio	Last Changed	Local Ports
<i>No ports enabled or no existing partners</i>					

Aggr ID

The Aggregation ID associated with this aggregation instance. For LLAG the id is shown as 'isid:aggr-id' and for GLAGs as 'aggr-id'

Partner System ID

The system ID (MAC address) of the aggregation partner.

Partner Key

The Key that the partner has assigned to this aggregation ID.

Last changed

The time since this aggregation changed.

Local Ports

Shows which ports are a part of this aggregation for this switch.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

LACP Port Status

This page provides a status overview for LACP status for all ports.

LACP Status for Switch 1 Auto-refresh [Refresh](#)

Port	LACP	Key	Aggr ID	Partner System ID	Partner Port	Partner Prio
1	No	-	-	-	-	-
2	No	-	-	-	-	-
3	No	-	-	-	-	-
4	No	-	-	-	-	-
5	No	-	-	-	-	-
6	No	-	-	-	-	-
7	No	-	-	-	-	-
8	No	-	-	-	-	-
9	No	-	-	-	-	-
10	No	-	-	-	-	-
11	No	-	-	-	-	-
12	No	-	-	-	-	-
13	No	-	-	-	-	-
14	No	-	-	-	-	-
15	No	-	-	-	-	-
16	No	-	-	-	-	-
17	No	-	-	-	-	-
18	No	-	-	-	-	-

Port

The switch port number.

LACP

'Yes' means that LACP is enabled and the port link is up. 'No' means that LACP is not enabled or that the port link is down. 'Backup' means that the port could not join the aggregation group but will join if other port leaves. Meanwhile it's LACP status is disabled.

Key

The key assigned to this port. Only ports with the same key can aggregate together.

Aggr ID

The Aggregation ID assigned to this aggregation group.

Partner System ID

The partner's System ID (MAC address).

Partner Port

The partner's port number connected to this port.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

LACP statistics

This page provides an overview for LACP statistics for all ports.

LACP Statistics for Switch 1 Auto-refresh Refresh Clear

Port	LACP Received	LACP Transmitted	Discarded	
			Unknown	Illegal
1	0	0	0	0
2	0	0	0	0
3	0	0	0	0
4	0	0	0	0
5	0	0	0	0
6	0	0	0	0
7	0	0	0	0
8	0	0	0	0
9	0	0	0	0
10	0	0	0	0
11	0	0	0	0
12	0	0	0	0
13	0	0	0	0
14	0	0	0	0
15	0	0	0	0
16	0	0	0	0
17	0	0	0	0
18	0	0	0	0

Port

The switch port number.

LACP Received

Shows how many LACP frames have been received at each port.

LACP Transmitted

Shows how many LACP frames have been sent from each port.

Discarded

Shows how many unknown or illegal LACP frames have been discarded at each port.

Buttons

Auto-refresh: Click this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

Clear: Clears the counters for all ports.

Loop Protection

This page displays the loop protection port status the ports of the switch.

Loop Protection Status for Switch 1 Auto-refresh [Refresh](#)

Port	Action	Transmit	Loops	Status	Loop	Time of Last Loop
<i>No ports enabled</i>						

Loop protection port status is:

Port

The switch port number of the logical port.

Action

The currently configured port action.

Transmit

The currently configured port transmit mode.

Loops

The number of loops detected on this port.

Status

The current loop protection status of the port.

Loop

Whether a loop is currently detected on the port.

Time of Last Loop

The time of the last loop event detected.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

STP Bridge Status

This page provides a status overview of all STP bridge instances.

Bridge Status

The displayed table contains a row for each STP bridge instance, where the column displays the following information:

STP Bridges Auto-refresh Refresh

MSTI	Bridge ID	Root			Topology Flag	Topology Change Last
		ID	Port	Cost		
CIST	32768.00-03-CE-21-85-AA	32768.00-03-CE-21-85-AA	-	0	Steady	-

MSTI

The Bridge Instance. This is also a link to the STP Detailed Bridge Status

Bridge ID

The Bridge ID of this Bridge instance.

Root ID

The Bridge ID of the currently elected root bridge.

Root Port

The switch port currently assigned the root port role.

Root Cost

Root Path Cost. For the Root Bridge it is zero. For all other Bridges, it is the sum of the Port Path Costs on the least cost path to the Root Bridge.

Topology Flag

The current state of the Topology Change Flag of this Bridge instance.

Topology Change Last

The time since last Topology Change occurred.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

STP Port Status

This page displays the STP CIST port status for physical ports of the switch.

STP port status is:

STP Port Status for Switch 1

Auto-refresh

Port	CIST Role	CIST State	Uptime
1	Disabled	Discarding	-
2	Disabled	Discarding	-
3	Disabled	Discarding	-
4	Disabled	Discarding	-
5	Disabled	Discarding	-
6	Disabled	Discarding	-
7	Disabled	Discarding	-
8	Disabled	Discarding	-
9	Disabled	Discarding	-
10	Disabled	Discarding	-
11	Disabled	Discarding	-
12	Disabled	Discarding	-
13	Disabled	Discarding	-
14	Disabled	Discarding	-
15	Disabled	Discarding	-
16	DesignatedPort	Forwarding	0d 01:08:53

Port

The switch port number of the logical STP port.

CIST Role

The current STP port role of the CIST port. The port role can be one of the following values: AlternatePort BackupPort RootPort DesignatedPort Disabled.

CIST State

The current STP port state of the CIST port. The port state can be one of the following values: Discarding Learning Forwarding.

Uptime

The time since the bridge port was last initialized.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

STP Port Statistics

This page displays the STP port statistics counters of bridge ports in the switch.
 The STP port statistics counters are:

STP Statistics for Switch 1

Auto-refresh [Refresh](#) [Clear](#)

Port	Transmitted				Received				Discarded	
	MSTP	RSTP	STP	TCN	MSTP	RSTP	STP	TCN	Unknown	Illegal
16	2087	0	0	0	0	0	0	0	0	0

Port

The switch port number of the logical STP port.

MSTP

The number of MSTP Configuration BPDU's received/transmitted on the port.

RSTP

The number of RSTP Configuration BPDU's received/transmitted on the port.

STP

The number of legacy STP Configuration BPDU's received/transmitted on the port.

TCN

The number of (legacy) Topology Change Notification BPDU's received/transmitted on the port.

Discarded Unknown

The number of unknown Spanning Tree BPDU's received (and discarded) on the port.

Discarded Illegal

The number of illegal Spanning Tree BPDU's received (and discarded) on the port.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

MVR Status

Statistics

This page provides MVR Statistics information.

MVR Statistics for Switch 1

Auto-refresh Refresh Clear

VLAN ID	IGMP/MLD Queries Received	IGMP/MLD Queries Transmitted	IGMPv1 Joins Received	IGMPv2/MLDv1 Reports Received	IGMPv3/MLDv2 Reports Received	IGMPv2/MLDv1 Leaves Received
<i>No more entries</i>						

VLAN ID

The Multicast VLAN ID.

V1 Reports Received

The number of Received V1 Reports.

V2 Reports Received

The number of Received V2 Reports.

V3 Reports Received

The number of Received V3 Reports.

V2 Leaves Received

The number of Received V2 Leaves.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears all Statistics counters.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

MVR Group Table

Entries in the MVR Group Table are shown on this page. The MVR Group Table is sorted first by VLAN ID, and then by group.

MVR Channels (Groups) Information for Switch 1 Auto-refresh Refresh |<< >>

Start from VLAN and Group Address with entries per page.

VLAN ID	Groups	Port Members																																																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
<i>No more entries</i>																																																			

Navigating the MVR Group Table

Each page shows up to 99 entries from the MVR Group table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the MVR Group Table.

The "Start from VLAN", and "group" input fields allow the user to select the starting point in the MVR Group Table. Clicking the Refresh button will update the displayed table starting from that or the closest next MVR Group Table match. In addition, the two input fields will - upon a Refresh button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The >> will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the |<< button to start over.

MVR Group Table Columns

VLAN ID

VLAN ID of the group.

Groups

Group ID of the group displayed.

Port Members

Ports under this group.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the MVR Group Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

Monitor / IPMC / IGMP Snooping

IGMP Snooping

IGMP Snooping Status

This page provides IGMP Snooping status.

IGMP Snooping Status

Auto-refresh Refresh Clear

Statistics

VLAN ID	Querier Version	Host Version	Querier Status	Queries Transmitted	Queries Received	V1 Reports Received	V2 Reports Received	V3 Reports Received	V2 Leaves Received
---------	-----------------	--------------	----------------	---------------------	------------------	---------------------	---------------------	---------------------	--------------------

Router Port

Port	Status
1	-
2	-
3	-
4	-
5	-
6	-
7	-

VLAN ID

The VLAN ID of the entry.

Querier Version

Working Querier Version currently.

Host Version

Working Host Version currently.

Querier Status

Shows the Querier status is "ACTIVE" or "IDLE".

"DISABLE" denotes the specific interface is administratively disabled.

Queries Transmitted

The number of Transmitted Queries.

Queries Received

The number of Received Queries.

V1 Reports Received

The number of Received V1 Reports.

V2 Reports Received

The number of Received V2 Reports.

V3 Reports Received

The number of Received V3 Reports.

V2 Leaves Received

The number of Received V2 Leaves.

Router Port

Display which ports act as router ports. A router port is a port on the Ethernet switch that leads towards the Layer 3 multicast device or IGMP querier.

Static denotes the specific port is configured to be a router port.

Dynamic denotes the specific port is learnt to be a router port.

Both denotes the specific port is configured and learnt to be a router port.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears all Statistics counters.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

IGMP Group Information

Entries in the IGMP Group Table are shown on this page. The IGMP Group Table is sorted first by VLAN ID, and then by group.

IGMP Snooping Group Information Auto-refresh Refresh |<< >>

Start from VLAN and group address with entries per page.

		Port Members																																																	
VLAN ID	Groups	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
		No more entries																																																	

Navigating the IGMP Group Table

Each page shows up to 99 entries from the IGMP Group table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the IGMP Group Table.

The "Start from VLAN", and "group" input fields allow the user to select the starting point in the IGMP Group Table. Clicking the Refresh button will update the displayed table starting from that or the closest next IGMP Group Table match. In addition, the two input fields will - upon a Refresh button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The >> will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the |<< button to start over.

IGMP Group Table Columns

VLAN ID

VLAN ID of the group.

Groups

Group address of the group displayed.

Port Members

Ports under this group.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table, starting with the first entry in the IGMP Group Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

IGMP SFM Information Table

Entries in the IGMP SFM Information Table are shown on this page. The IGMP SFM (Souce-Filtered Multicast) Information Table also contains the SSM (Source-Specific Multicast) information. This table is sorted first by VLAN ID, then by group, and then by Port No. Different source add resses belong to the same group are treated as single entry.

IGMP SFM Information for Switch 1 Auto-refresh Refresh |<< >>

Start from VLAN and Group with entries per page.

VLAN ID	Group	Port	Mode	Source Address	Type	Hardware Filter/Switch
No more entries						

Navigating the IGMP SFM Information Table

Each page shows up to 99 entries from the IGMP SFM Information table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the IGMP SFM Information Table.

The "Start from VLAN", and "group" input fields allow the user to select the starting point in the IGMP SFM Information Table. Clicking the Refresh button will update the displayed table starting from that or the closest next IGMP SFM Information Table match. In addition, the two input fields will - upon a Refresh button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The >> will use the last entry of the currently displayed table as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the |<< button to start over.

IGMP SFM Information Table Columns

VLAN ID

VLAN ID of the group.

Group

Group address of the group displayed.

Port

Switch port number.

Mode

Indicates the filtering mode maintained per (VLAN ID, port number, Group Address) basis. It can be either Include or Exclude.

Source Address

IP Address of the source. Currently, system limits the total number of IP source addresses for filtering to be 128.

Type

Indicates the Type. It can be either Allow or Deny.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the IGMP SFM Information Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

MLD Snooping Status

This page provides MLD Snooping status.

MLD Snooping Status

Auto-refresh Refresh Clear

Statistics

VLAN ID	Querier Version	Host Version	Querier Status	Queries Transmitted	Queries Received	V1 Reports Received	V2 Reports Received	V1 Leaves Received
---------	-----------------	--------------	----------------	---------------------	------------------	---------------------	---------------------	--------------------

Router Port

Port	Status
1	-
2	-
3	-

VLAN ID

The VLAN ID of the entry.

Querier Version

Working Querier Version currently.

Host Version

Working Host Version currently.

Querier Status

Show the Querier status is "ACTIVE" or "IDLE".

"DISABLE" denotes the specific interface is administratively disabled.

Queries Transmitted

The number of Transmitted Queries.

Queries Received

The number of Received Queries.

V1 Reports Received

The number of Received V1 Reports.

V2 Reports Received

The number of Received V2 Reports.

V1 Leaves Received

The number of Received V1 Leaves.

Router Port

Display which ports act as router ports. A router port is a port on the Ethernet switch that leads towards the Layer 3 multicast device or IGMP querier.

Static denotes the specific port is configured to be a router port.

Dynamic denotes the specific port is learnt to be a router port.

Both denotes the specific port is configured and learnt to be a router port.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears all Statistics counters.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

MLD Group Table

Entries in the MLD Group Table are shown on this page. The MLD Group Table is sorted first by VLAN ID, and then by group.

MLD Snooping Group Information for Switch 1 Auto-refresh Refresh |<< >>

Start from VLAN and group address with entries per page.

		Port Members																																																	
VLAN ID	Groups	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
No more entries																																																			

Navigating the MLD Group Table

Each page shows up to 99 entries from the MLD Group table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the MLD Group Table.

The "Start from VLAN", and "group" input fields allow the user to select the starting point in the MLD Group Table. Clicking the Refresh button will update the displayed table starting from that or the next closest MLD Group Table match. In addition, the two input fields will - upon a Refresh button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The >> will use the last entry of the currently displayed as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the |<< button to start over.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the MLD Group Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

MLD SFM Information Table

Entries in the MLD SFM Information Table are shown on this page. The MLD SFM (Souce-Filtered Multicast) Information Table also contains the SSM (Source-Specific Multicast) information. This table is sorted first by VLAN ID, then by group, and then by Port No. Diffrent source addresses belong to the same group are treated as single entry.

MLD Snooping Group Information for Switch 1 Auto-refresh Refresh << >>

Start from VLAN and group address with entries per page.

VLAN ID	Groups	Port Members																																																	
No more entries																																																			

Navigating the MLD SFM Information Table

Each page shows up to 64 entries from the MLD SFM Information table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the MLD SFM Information Table.

The "Start from VLAN", and "group" input fields allow the user to select the starting point in the MLD SFM Information Table. Clicking the button will update the displayed table starting from that or the closest next MLD SFM Information Table match. In addition, the two input fields will - upon a button click - assume the value of the first displayed entry, allowing for continuous refresh with the same start address.

The will use the last entry of the currently displayed as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

MLD SFM Information Table Columns

- VLAN ID**
VLAN ID of the group.
- Group**
Group address of the group displayed.
- Port**
Switch port number.

Mode

Indicates the filtering mode maintained per (VLAN ID, port number, Group Address) basis. It can be either Include or Exclude.

Source Address

IP Address of the source. Currently, system limits the total number of IP source addresses for filtering to be 128.

Type

Indicates the Type. It can be either Allow or Deny.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the input fields.

|<<: Updates the table starting from the first entry in the MLD SFP Information Table.

>>: Updates the table, starting with the entry after the last entry currently displayed.

Monitor / LLDP

LLDP / Neighbor

This page provides a status overview for all LLDP neighbors. The displayed table contains a row for each port on which an LLDP neighbor is detected. The columns hold the following information:

LLDP Remote Device Summary						
Local Port	Chassis ID	Port ID	Port Description	System Name	System Capabilities	Management Address
No neighbour information found						

Auto-refresh Refresh

Local Port

The port on which the LLDP frame was received.

Chassis ID

The Chassis ID is the identification of the neighbor's LLDP frames.

Remote Port ID

The Remote Port ID is the identification of the neighbor port.

System Name

System Name is the name advertised by the neighbor unit.

Port Description

Port Description is the port description advertised by the neighbor unit.

System Capabilities

System Capabilities describes the neighbor unit's capabilities. The possible capabilities are:

1. Other
2. Repeater
3. Bridge
4. WAN Access Point
5. Router
6. Telephone
7. DOCSIS cable device
8. Station only
9. Reserved

When a capability is enabled, the capability is followed by (+). If the capability is disabled, the capability is followed by (-).

Management Address

Management Address is the neighbor unit's address that is used for higher layer entities to assist discovery by the network management. This could for instance hold the neighbor's IP address.


Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

LLDP MED Neighbors

This page provides a status overview of all LLDP-MED neighbors. The displayed table contains a row for each port on which an LLDP neighbor is detected. This function applies to VoIP devices which support LLDP-MED. The columns hold the following information:



Port

The port on which the LLDP frame was received.

Device Type

LLDP-MED Devices are comprised of two primary Device Types: Network Connectivity Devices and Endpoint Devices.

LLDP-MED Network Connectivity Device Definition

LLDP-MED Network Connectivity Devices, as defined in TIA-1057, provide access to the IEEE 802 based LAN infrastructure for LLDP-MED Endpoint Devices. An LLDP-MED Network Connectivity Device is a LAN access device based on any of the following technologies:

1. LAN Switch / Router
2. IEEE 802.1 Bridge
3. IEEE 802.3 Repeater (included for historical reasons)
4. IEEE 802.11 Wireless Access Point
5. Any device that supports the IEEE 802.1AB and MED extensions defined by TIA-1057 and can relay IEEE 802 frames via any method.

LLDP-MED Endpoint Device Definition

LLDP-MED Endpoint Devices, as defined in TIA-1057, are located at the IEEE 802 LAN network edge, and participate in IP communication service using the LLDP-MED framework.

Within the LLDP-MED Endpoint Device category, the LLDP-MED scheme is broken into further Endpoint Device Classes, as defined in the following.

Each LLDP-MED Endpoint Device Class is defined to build upon the capabilities defined for the previous Endpoint Device Class. For-example will any LLDP-MED Endpoint Device claiming compliance as a Media Endpoint (Class II) also support all aspects of TIA-1057 applicable to Generic Endpoints (Class I), and any LLDP-MED Endpoint Device claiming compliance as a Communication Device (Class III) will

also support all aspects of TIA-1057 applicable to both Media Endpoints (Class II) and Generic Endpoints (Class I).

LLDP-MED Generic Endpoint (Class I)

The LLDP-MED Generic Endpoint (Class I) definition is applicable to all endpoint products that require the base LLDP discovery services defined in TIA-1057, however do not support IP media or act as an end-user communication appliance. Such devices may include (but are not limited to) IP Communication Controllers, other communication related servers, or any device requiring basic services as defined in TIA-1057.

Discovery services defined in this class include LAN configuration, device location, network policy, power management, and inventory management.

LLDP-MED Media Endpoint (Class II)

The LLDP-MED Media Endpoint (Class II) definition is applicable to all endpoint products that have IP media capabilities however may or may not be associated with a particular end user. Capabilities include all of the capabilities defined for the previous Generic Endpoint Class (Class I), and are extended to include aspects related to media streaming. Example product categories expected to adhere to this class include (but are not limited to) Voice / Media Gateways, Conference Bridges, Media Servers, and similar.

Discovery services defined in this class include media-type-specific network layer policy discovery.

LLDP-MED Communication Endpoint (Class III)

The LLDP-MED Communication Endpoint (Class III) definition is applicable to all endpoint products that act as end user communication appliances supporting IP media. Capabilities include all of the capabilities defined for the previous Generic Endpoint (Class I) and Media Endpoint (Class II) classes, and are extended to include aspects related to end user devices. Example product categories expected to adhere to this class include (but are not limited to) end user communication appliances, such as IP Phones, PC-based softphones, or other communication appliances that directly support the end user.

Discovery services defined in this class include provision of location identifier (including ECS / E911 information), embedded L2 switch support, inventory management.

LLDP-MED Capabilities

LLDP-MED Capabilities describes the neighbor unit's LLDP-MED capabilities. The possible capabilities are:

1. LLDP-MED capabilities
2. Network Policy
3. Location Identification
4. Extended Power via MDI-PSE
5. Extended Power via MDI-PD
6. Inventory
7. Reserved

Application Type

Application Type indicating the primary function of the application(s) defined for this network policy, advertised by an Endpoint or Network Connectivity Device. The possible application types are shown below.

1. Voice - for use by dedicated IP Telephony handsets and other similar appliances supporting interactive voice services. These devices are typically deployed on a separate VLAN for ease of deployment and enhanced security by isolation from data applications.
2. Voice Signalling - for use in network topologies that require a different policy for the voice signalling than for the voice media.
3. Guest Voice - to support a separate limited feature-set voice service for guest users and visitors with their own IP Telephony handsets and other similar appliances supporting interactive voice services.
4. Guest Voice Signalling - for use in network topologies that require a different policy for the guest voice signalling than for the guest voice media.
5. Softphone Voice - for use by softphone applications on typical data centric devices, such as PCs or laptops.
6. Video Conferencing - for use by dedicated Video Conferencing equipment and other similar appliances supporting real-time interactive video/audio services.

7. Streaming Video - for use by broadcast or multicast based video content distribution and other similar applications supporting streaming video services that require specific network policy treatment. Video applications relying on TCP with buffering would not be an intended use of this application type.
8. Video Signalling - for use in network topologies that require a separate policy for the video signalling than for the video media.

Policy

Policy indicates that an Endpoint Device wants to explicitly advertise that the policy is required by the device. Can be either Defined or Unknown

Unknown: The network policy for the specified application type is currently unknown.

Defined: The network policy is defined.

TAG

TAG is indicative of whether the specified application type is using a tagged or an untagged VLAN. Can be Tagged or Untagged.

Untagged: The device is using an untagged frame format and as such does not include a tag header as defined by IEEE 802.1Q-2003.

Tagged: The device is using the IEEE 802.1Q tagged frame format.

VLAN ID

VLAN ID is the VLAN identifier (VID) for the port as defined in IEEE 802.1Q-2003. A value of 1 through 4094 is used to define a valid VLAN ID. A value of 0 (Priority Tagged) is used if the device is using priority tagged frames as defined by IEEE 802.1Q-2003, meaning that only the IEEE 802.1D priority level is significant and the default PVID of the ingress port is used instead.

Priority

Priority is the Layer 2 priority to be used for the specified application type. One of the eight priority levels (0 through 7).

DSCP

DSCP is the DSCP value to be used to provide Diffserv node behavior for the specified application type as defined in IETF RFC 2474. Contain one of 64 code point values (0 through 63).

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

LLDP EEE

By using EEE power savings can be achieved at the expense of traffic latency. This latency occurs due to that the circuits EEE turn off to save power, need time to boot up before sending traffic over the link. This time is called "wakeup time". To achieve minimal latency, devices can use LLDP to exchange information about their respective tx and rx "wakeup time ", as a way to agree upon the minimum wakeup time they need.

This page provides an overview of EEE information exchanged by LLDP.

LLDP Neighbors EEE Information for Switch 1

Auto-refresh Refresh

Local Port	Tx Tw	Rx Tw	Fallback Receive Tw	Echo Tx Tw	Echo Rx Tw	Resolved Tx Tw	Resolved Rx Tw	EEE in Sync
No LLDP EEE information found								

LLDP Neighbors EEE Information

The displayed table contains a row for each port. The columns hold the following information:

Local Port

The port on which LLDP frames are received or transmitted.

Tx Tw

The link partner's maximum time that transmit path can holdoff sending data after deassertion of LPI.

Rx Tw

The link partner's time that receiver would like the transmitter to holdoff to allow time for the receiver to wake from sleep.

Fallback Receive Tw

The link partner's fallback receive Tw.

A receiving link partner may inform the transmitter of an alternate desired Tw_sys_tx. Since a receiving link partner is likely to have discrete levels for savings, this provides the transmitter with additional information that it may use for a more efficient allocation. Systems that do not implement this option default the value to be the same as that of the Receive Tw_sys_tx.

Echo Tx Tw

The link partner's Echo Tx Tw value

The respective echo values shall be defined as the local link partners reflection (echo) of the remote link partners respective values. When a local link partner receives its echoed values from the remote link partner it can determine whether or not the remote link partner has received, registered and processed its most recent values. For example, if the local link partner receives echoed parameters that do not match the values in its local MIB, then the local link partner infers that the remote link partners request was based on stale information.

Echo Rx Tw

The link partner's Echo Rx Tw value.

Resolved Tx Tw

The resolved Tx Tw for this link. Note : NOT the link partner

The resolved value that is the actual "tx wakeup time " used for this link (based on EEE information exchanged via LLDP).

Resolved Rx Tw

The resolved Rx Tw for this link. Note : NOT the link partner

The resolved value that is the actual "tx wakeup time " used for this link (based on EEE information exchanged via LLDP).

EEE activated

Show if the switch and the link partner have agree upon which wakeup times to use.

Red - Switch and link partner have not agreed upon wakeup time.

Green - Switch and link partner have agreed upon wakeup time.

Buttons

Refresh: Click to refresh the page immediately.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

LLDP Statistics

This page provides an overview of all LLDP traffic.

Two types of counters are shown. Global counters are counters that refer to the whole switch, while local counters refer to per port counters for the currently selected switch.

LLDP Global Counters for Switch 1

Auto-refresh Refresh Clear

Global Counters	
Neighbour entries were last changed	1970-01-01T00:00:00+00:00 (57726 secs. ago)
Total Neighbours Entries Added	0
Total Neighbours Entries Deleted	0
Total Neighbours Entries Dropped	0
Total Neighbours Entries Aged Out	0

LLDP Statistics Local Counters for Switch 1

Local Port	Tx Frames	Rx Frames	Rx Errors	Frames Discarded	TLVs Discarded	TLVs Unrecognized	Org. Discarded	Age-Outs
1	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0
8	0	0	0	0	0	0	0	0
9	0	0	0	0	0	0	0	0
10	0	0	0	0	0	0	0	0
11	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0

Global Counters

Neighbor entries were last changed on

It also shows the time when the last entry was last deleted or added. It also shows the time elapsed since the last change was detected.

Total Neighbors Entries Added

Shows the number of new entries added since switch reboot.

Total Neighbors Entries Deleted

Shows the number of new entries deleted since switch reboot.

Total Neighbors Entries Dropped

Shows the number of LLDP frames dropped due to the entry table being full.

Total Neighbors Entries Aged Out

Shows the number of entries deleted due to Time-To-Live expiring.

Local Counters

The displayed table contains a row for each port. The columns hold the following information:

Local Port

The port on which LLDP frames are received or transmitted.

Tx Frames

The number of LLDP frames transmitted on the port.

Rx Frames

The number of LLDP frames received on the port.

Rx Errors

The number of received LLDP frames containing some kind of error.

Frames Discarded

If an LLDP frame is received on a port, and the switch's internal table has run full, the LLDP frame is counted and discarded. This situation is known as "Too Many Neighbors" in the LLDP standard. LLDP frames require a new entry in the table when the Chassis ID or Remote Port ID is not already contained within the table. Entries are removed from the table when a given port's link is down, an LLDP shutdown frame is received, or when the entry ages out.

TLVs Discarded

Each LLDP frame can contain multiple pieces of information, known as TLVs (TLV is short for "Type Length Value"). If a TLV is malformed, it is counted and discarded.

TLVs Unrecognized

The number of well-formed TLVs, but with an unknown type value.

Org. Discarded

The number of organizationally received TLVs.

Age-Outs

Each LLDP frame contains information about how long time the LLDP information is valid (age-out time). If no new LLDP frame is received within the age out time, the LLDP information is removed, and the Age-Out counter is incremented.

Buttons

Refresh: Click to refresh the page immediately.

Clear: Clears the local counters. All counters (including global counters) are cleared upon reboot.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Buttons

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Refreshes the displayed table starting from the "Start from MAC address" and "VLAN" input fields.

Clear: Flushes all dynamic entries.

|<<: Updates the table starting from the first entry in the MAC Table, i.e. the entry with the lowest VLAN ID and MAC address.

>>: Updates the table, starting with the entry after the last entry currently displayed.

VLAN Membership Status

This page provides an overview of membership status of VLAN users.

VLAN Membership Status for Combined users Combined Auto-refresh Refresh
 Start from VLAN 1 with 20 entries per page. << >>

VLAN ID	Port Members																																																	
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
1	<input checked="" type="checkbox"/>																																																	

VLAN USER

VLAN User module uses services of the VLAN management functionality to configure VLAN memberships and VLAN port configurations such as PVID and UVID. Currently we support the following VLAN user types:

CLI/Web/SNMP: These are referred to as static.

NAS: NAS provides port-based authentication, which involves communications between a Supplicant, Authenticator, and an Authentication Server.

MVRP: Multiple VLAN Registration Protocol (MVRP) allows dynamic registration and deregistration of VLANs on ports on a VLAN bridged network.

Voice VLAN: Voice VLAN is a VLAN configured specially for voice traffic typically originating from IP phones.

MVR: MVR is used to eliminate the need to duplicate multicast traffic for subscribers in each VLAN. Multicast traffic for all channels is sent only on a single (multicast) VLAN.

MSTP: The 802.1s Multiple Spanning Tree protocol (MSTP) uses VLANs to create multiple spanning trees in a network, which significantly improves network resource utilization while maintaining a loop-free environment.

Port Members

A row of check boxes for each port is displayed for each VLAN ID.

If a port is included in a VLAN, an image will be displayed.

If a port is included in a Forbidden port list, an image will be displayed.

If a port is included in a Forbidden port list and dynamic VLAN user register VLAN on same Forbidden port, then conflict port will be displayed as.

VLAN Membership

The VLAN Membership Status Page shall show the current VLAN port members for all VLANs configured by a selected VLAN User (selection shall be allowed by a Combo Box). When ALL VLAN Users are selected, it shall show this information for all the VLAN Users, and this is by default. VLAN membership allows the frames classified to the VLAN ID to be forwarded on the respective VLAN member ports.

Navigating the VLAN Monitor page

Each page shows up to 99 entries from the VLAN table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.

The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the closest next VLAN Table match. The will use the last entry of the currently displayed VLAN entry as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

Navigating the VLAN Monitor page

Each page shows up to 99 entries from the VLAN table, default being 20, selected through the "entries per page" input field. When first visited, the web page will show the first 20 entries from the beginning of the VLAN Table. The first displayed will be the one with the lowest VLAN ID found in the VLAN Table.

The "VLAN" input fields allow the user to select the starting point in the VLAN Table. Clicking the button will update the displayed table starting from that or the closest next VLAN Table match. The will use the last entry of the currently displayed VLAN entry as a basis for the next lookup. When the end is reached the text "No more entries" is shown in the displayed table. Use the button to start over.

Buttons

: Select VLAN Users from this drop down list.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

VLAN Port Status

This page provides VLAN Port Status.

VLAN Port Status for Static user

Static

Port	PVID	Port Type	Ingress Filtering	Frame Type	Tx Tag	UVID	Conflicts
1	1	UnAware	Disabled	All	Untag_this	1	No
2	1	UnAware	Disabled	All	Untag_this	1	No
3	1	UnAware	Disabled	All	Untag_this	1	No
4	1	UnAware	Disabled	All	Untag_this	1	No
5	1	UnAware	Disabled	All	Untag_this	1	No
6	1	UnAware	Disabled	All	Untag_this	1	No
7	1	UnAware	Disabled	All	Untag_this	1	No
8	1	UnAware	Disabled	All	Untag_this	1	No
9	1	UnAware	Disabled	All	Untag_this	1	No

VLAN USER

VLAN User module uses services of the VLAN management functionality to configure VLAN memberships and VLAN port configuration such as PVID, UVID. Currently we support following VLAN User types:

CLI/Web/SNMP: These are referred to as static.

NAS: NAS provides port-based authentication, which involves communications between a Supplicant, Authenticator, and an Authentication Server.

MVRP: Multiple VLAN Registration Protocol (MVRP) allows dynamic registration and deregistration of VLANs on ports on a VLAN bridged network.

Voice VLAN : Voice VLAN is a VLAN configured specially for voice traffic typically originating from IP phones.

MVR: MVR is used to eliminate the need to duplicate multicast traffic for subscribers in each VLAN. Multicast traffic for all channels is sent only on a single (multicast) VLAN.

MSTP: The 802.1s Multiple Spanning Tree protocol (MSTP) uses VLANs to create multiple spanning trees in a network, which significantly improves network resource utilization while maintaining a loop-free environment.

Port

The logical port for the settings contained in the same row.

PVID

Shows the VLAN identifier for that port. The allowed values are 1 through 4095. The default value is 1.

Port Type

Shows the Port Type. Port type can be any of Unaware, C-port, S-port, Custom S-port.

If Port Type is Unaware, all frames are classified to the Port VLAN ID and tags are not removed.

C-port is Customer Port. S-port is Service port. Custom S-port is S-port with Custom TPID.

Ingress Filtering

Shows the ingress filtering on a port. This parameter affects VLAN ingress processing. If ingress filtering is enabled and the ingress port is not a member of the classified VLAN, the frame is discarded.

Frame Type

Shows whether the port accepts all frames or only tagged frames. This parameter affects VLAN ingress processing. If the port only accepts tagged frames, untagged frames received on that port are discarded.

Tx Tag

Shows egress filtering frame status whether tagged or untagged.

UVID

Shows UVID (untagged VLAN ID). Port's UVID determines the packet's behaviour at the egress side.

Conflicts

Shows status of Conflicts whether exists or not. When a Volatile VLAN User requests to set VLAN membership or VLAN port configuration, the following conflicts can occur:

Functional Conflicts between features.

Conflicts due to hardware limitation.

Direct conflict between user modules.

Buttons

: Select VLAN Users from this drop down list.

Auto-refresh: Check this box to enable an automatic refresh of the page at regular intervals.

Refresh: Click to refresh the page immediately.

VCL MAC-Based VLAN Status

This page shows MAC-based VLAN entries configured by various MAC-based VLAN users. Currently we support following VLAN User types:

MAC-based VLAN Membership Status for User Static

Static Auto-refresh Refresh

MAC Address	VLAN ID	Port Members																																																	
No data exists for the user																																																			

CLI/Web/SNMP: These are referred to as static.

NAS: NAS provides port-based authentication, which involves communications between a Supplicant, Authenticator, and an Authentication Server.

MAC Address

Indicates the MAC address.

VLAN ID

Indicates the VLAN ID.

Port Members

Port members of the MAC-based VLAN entry.

Buttons

Refresh: Refreshes the displayed table.

sFlow

This page shows the sFlow Statistics.

sFlow Statistics Auto-refresh

Receiver Statistics

Owner	<none>
IP Address/Hostname	0.0.0.0
Timeout	0
Tx Successes	0
Tx Errors	0
Flow Samples	0
Counter Samples	0

Port Statistics for Switch 1

Port	Rx Flow Samples	Tx Flow Samples	Counter Samples
1	0	0	0
2	0	0	0
3	0	0	0
4	0	0	0
5	0	0	0
6	0	0	0
7	0	0	0
8	0	0	0
9	0	0	0

Flow Sampling

Packet flow sampling refers to arbitrarily choosing some packets out of a specified number, reading the first "Max Hdr Size" bytes and exporting the sampled datagram for analysis.

The attributes associated with the flow sampling are: sampler type, sampling rate, maximum header size.

Counter Sampling

Counter sampling performs periodic, time-based sampling or polling of counters associated with an interface enabled for sFlow.

Attribute associated with counter sampling is polling interval.

sFlow Ports

List of the port numbers on which sFlow is configured.

Sampler Type

Configured sampler type on the port and could be any of the types: None, RX, TX, ALL.

Diagnostic

This section provides some convenient tool for user to do switch diagnostic from remote site.

Ping

This page allows you to issue ICMP PING packets to troubleshoot IP connectivity issues.

Type the IP Address, ping length (default = 56 bytes), ping count (default=5) and ping interval (default =1). Then press "Start" to start ping remote host. After you press Start, 5 ICMP packets are transmitted, and the sequence number and roundtrip time are displayed upon reception of a reply. The page refreshes automatically until responses to all packets are received, or until a timeout occurs.

ICMP Ping Output Result

PING server 192.168.2.100, 56 bytes of data.

64 bytes from 192.168.2.100: icmp_seq=0, time=0ms

64 bytes from 192.168.2.100: icmp_seq=1, time=0ms

64 bytes from 192.168.2.100: icmp_seq=2, time=0ms

64 bytes from 192.168.2.100: icmp_seq=3, time=0ms

64 bytes from 192.168.2.100: icmp_seq=4, time=0ms

Sent 5 packets, received 5 OK, 0 bad

IP Address

The destination IP Address.

Ping Length

The payload size of the ICMP packet. Values range from 2 bytes to 1452 bytes.

Ping Count

The count of the ICMP packet. Values range from 1 time to 60 times.

Ping Interval

The interval of the ICMP packet. Values range from 0 second to 30 seconds.

Ping6

This page allows you to issue ICMPv6 PING packets to troubleshoot IPv6 connectivity issues.

Type the IPv6 Address, ping length (default = 56 bytes), ping count (default=5) and ping interval (default =1). Then press "Start" to start ping remote host. After you press Start, 5 ICMPv6 packets are transmitted, and the sequence number and roundtrip time are displayed upon reception of a reply. The page refreshes automatically until responses to all packets are received, or until a timeout occurs.

ICMPv6 Ping Output

```
PING6 server ::10.10.132.20
64 bytes from ::10.10.132.20: icmp_seq=0, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=1, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=2, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=3, time=0ms
64 bytes from ::10.10.132.20: icmp_seq=4, time=0ms
Sent 5 packets, received 5 OK, 0 bad
```

You can configure the following properties of the issued ICMP packets:

IP Address

The destination IP Address.

Ping Length

The payload size of the ICMP packet. Values range from 2 bytes to 1452 bytes.

Ping Count

The count of the ICMP packet. Values range from 1 time to 60 times.

Ping Interval

The interval of the ICMP packet. Values range from 0 second to 30 seconds.

VeriPHY Cable Diagnostic

This page is used for running the VeriPHY Cable Diagnostics.

Select the port and then press Start to run the diagnostics. This will take approximately 5 seconds. If all ports are selected, this can take approximately 15 seconds. When completed, the page refreshes automatically, and you can view the cable diagnostics results in the cable status table. Note that VeriPHY is only accurate for cables of length 7 - 140 meters.

10 and 100 Mbps ports will be linked down while running VeriPHY. Therefore, running VeriPHY on a 10 or 100 Mbps management port will cause the switch to stop responding until VeriPHY is complete.

VeriPHY Cable Diagnostics

Port

Cable Status								
Port	Pair A	Length A	Pair B	Length B	Pair C	Length C	Pair D	Length D
1	--	--	--	--	--	--	--	--
2	--	--	--	--	--	--	--	--
3	--	--	--	--	--	--	--	--
4	--	--	--	--	--	--	--	--
5	--	--	--	--	--	--	--	--
6	--	--	--	--	--	--	--	--
7	--	--	--	--	--	--	--	--
8	--	--	--	--	--	--	--	--
9	--	--	--	--	--	--	--	--
10	--	--	--	--	--	--	--	--
11	--	--	--	--	--	--	--	--
12	--	--	--	--	--	--	--	--
13	--	--	--	--	--	--	--	--
14	--	--	--	--	--	--	--	--

Port

The port where you are requesting VeriPHY Cable Diagnostics.

Cable Status

Port: Port number.

Pair: The status of the cable pair.

The status of the cable pair.

OK - Correctly terminated pair

Open - Open pair

Short - Shorted pair

Short A - Cross-pair short to pair A

Short B - Cross-pair short to pair B

Short C - Cross-pair short to pair C

Short D - Cross-pair short to pair D

Cross A - Abnormal cross-pair coupling with pair A

Cross B - Abnormal cross-pair coupling with pair B

Cross C - Abnormal cross-pair coupling with pair C

Cross D - Abnormal cross-pair coupling with pair D

Length: The length (in meters) of the cable pair.

Maintenance

The section allows user to maintain the switch, such as Reset Factory Default, Firmware upgrading, Configuration Save/Restore and Restart the device.

Restart Device

You can restart the switch on this page. After restart, the switch will boot normally.

Restart Device

Are you sure you want to perform a Restart?

Yes: Click to restart device.

No: Click to return to the Port State page without restarting.

Factory Defaults

You can reset the configuration of the switch on this page. Only the IP configuration is retained.

The new configuration is available immediately, which means that no restart is necessary.

Factory Defaults

Are you sure you want to reset the configuration to Factory Defaults?

Yes: Click to reset the configuration to Factory Defaults.

No: Click to return to the Port State page without resetting the configuration.

Note: Restoring factory default can also be performed by making a physical loopback between port 1 and port 2 within the first minute from switch reboot. In the first minute after boot, 'loopback' packets will be transmitted at port 1. If a 'loopback' packet is received at port 2 the switch will do a restore to default.

Software Upload

Firmware Update


This page facilitates an update of the firmware controlling the switch.

Software Upload

No file chosen

"**Browse**" to the location of a software image, you can see the file name in the right of the Browse command. Click "Upload" to start the process.

Firmware update in progress

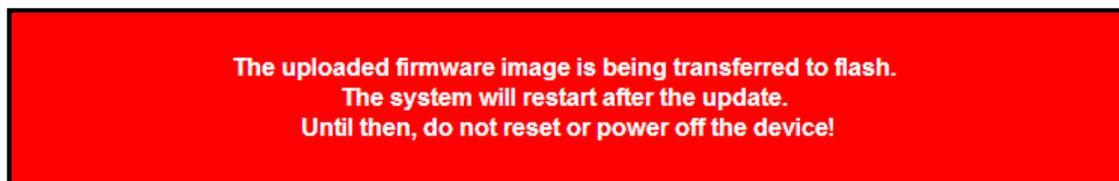

Waiting, please stand by...

After the software image is uploaded, a page announces that the firmware update is initiated. After about a minute, the firmware is updated and the switch restarts.

Warning: While the firmware is being updated, Web access appears to be defunct. The front LED flashes Green/Off with a frequency of 10 Hz while the firmware update is in progress. Do not restart or power off the device at this time or the switch may fail to function afterwards.

Image Select

There are 2 image saved within the switch.

This page provides information about the active and alternate (backup) firmware images in the device, and allows you to revert to the alternate image.

The web page displays two tables with information about the active and alternate firmware images.

Software Image Selection

Active Image	
Image	managed
Version	PoE (standalone) dev-build by root@virtual-centos 2012-07-01T15:54:24+08:00
Date	2012-07-01T15:54:24+08:00

Alternate Image	
Image	managed.bk
Version	SMBStaX (standalone) dev-build by uwai@Uwai-Fedora 2012-11-06T16:35:36+08:00 Config:config.mk
Date	2012-11-06T16:35:36+08:00

Note:

1. In case the active firmware image is the alternate image, only the "Active Image" table is shown. In this case, the Activate Alternate Image button is also disabled.
2. If the alternate image is active (due to a corruption of the primary image or by manual intervention), uploading a new firmware image to the device will automatically use the primary image slot and activate this.
3. The firmware version and date information may be empty for older firmware releases. This does not constitute an error.

Image Information

Image

The flash index name of the firmware image. The name of primary (preferred) image is image, the alternate image is named image.bk.

Version

The version of the firmware image.

Date

The date where the firmware was produced.

Buttons

Activate Alternate Image: Click to use the alternate image. This button may be disabled depending on system state.

Cancel: Cancel activating the backup image. Navigates away from this page.

Configuration

You can save/view or load the switch configuration. The configuration file is in XML format with a hierarchy of tags:

Header tags: `<?xml version="1.0"?>` and `<configuration>`. These tags are mandatory and must be present at the beginning of the file.

Section tags: `<platform>`, `<global>` and `<switch>`. The platform section must be the first section tag and this section must include the correct platform ID and version. The global section is optional and includes configuration which is not related to specific switch ports. The switch section is optional and includes configuration which is related to specific switch ports.

Module tags: `<ip>`, `<mac>`, `<port>` etc. These tags identify a module controlling specific parts of the configuration.

Group tags: `<port table>`, `<vlan table>` etc. These tags identify a group of parameters, typically a table.

Parameter tags: `<mode>`, `<entry>` etc. These tags identify parameters for the specific section, module and group. The `<entry>` tag is used for table entries.

Configuration parameters are represented as attribute values. When saving the configuration from the switch, the entire configuration including syntax descriptions is included in the file. The file may then be modified using an editor and loaded to a switch.

The example below shows a small configuration file only including configuration of the MAC address age time and the learning mode per port. When loading this file, only the included parameters will be changed. This means that the age time will be set to 200 and the learn mode will be set to automatic.

```
< ?xml version="1.0"?>
<configuration>
<platform>
<pid val="3"></pid>
<version val="1"></version>
</platform>
<global>
<mac>
<age val="200"></age>>
```

Chapter 5: Monitor, Diagnostic, Maintenance

Monitor, Diagnostic, Maintenance

```
</mac>  
</global>  
<switch sid="1">  
<mac>  
<entry port="1-24" learn mode="auto"></entry>  
</mac>  
</switch>  
< /configuration>
```

Save: Click to save the configuration file.

Upload: Click to upload the configuration file.

Appendix A: Product Safety

This appendix describes safety issues regarding to this product. To use this product safely, it is highly recommended to read this appendix before installing and using this product.

Failure to follow these precautions and warnings might cause product malfunction, electrical shock, or even fire. If this product is working abnormally (e.g. generating smoke), please stop using this product and contact your distributor or retailer immediately.

DO NOT install this product under conditions listed below:

- DO NOT install this product in an environment with conditions exceeding its specified operating environment.
- DO NOT install this product in an environment that is subjected to direct sunlight or near any heating equipment.
- DO NOT install this product in an environment with extreme temperature changes. Extreme temperature changes, even within the product's operating temperature range, may cause malfunctions.
- DO NOT install this product in a location near any sources of water or liquid.
- DO NOT stack this product with other network devices directly on top of one another. Stacking network devices directly without applying a mounting rack will cause this product to overheat.
- DO NOT install this product on an unstable surface. Doing so might cause this product to fall, resulting malfunction.

Product Maintenance Guide:


- DO NOT disassemble this product. Doing so might cause malfunction and void your product's warranty.
- It is recommended to keep your product clear of dust. To remove dust from your product, please use a dry brush and brush it off gently.
- When not using this product, please store it in an environment with low humidity, cool temperature, and free of dust. Failure to do so might cause malfunction.
- Before powering up this product, please make sure that the electric power source meets this product's requirement. DO NOT use other power adapters if this product comes with its own power adapter in the package.

Appendix B: IP Configuration for Your PC


This appendix describes how to set the IP address of your PC so you can connect to product configuration webpage. The configuration webpage allows you to set system variables or monitor system status.

The following section will guide you to set the IP address properly in a Microsoft Windows 8 environment. Setting IP address in other Microsoft operating system (such as Windows Vista or Windows 7) is quite the same and can be related.

1. Open **Network and Sharing Center** in **Control Panel**, and click on **Change adapter settings** as shown in the figure down below.

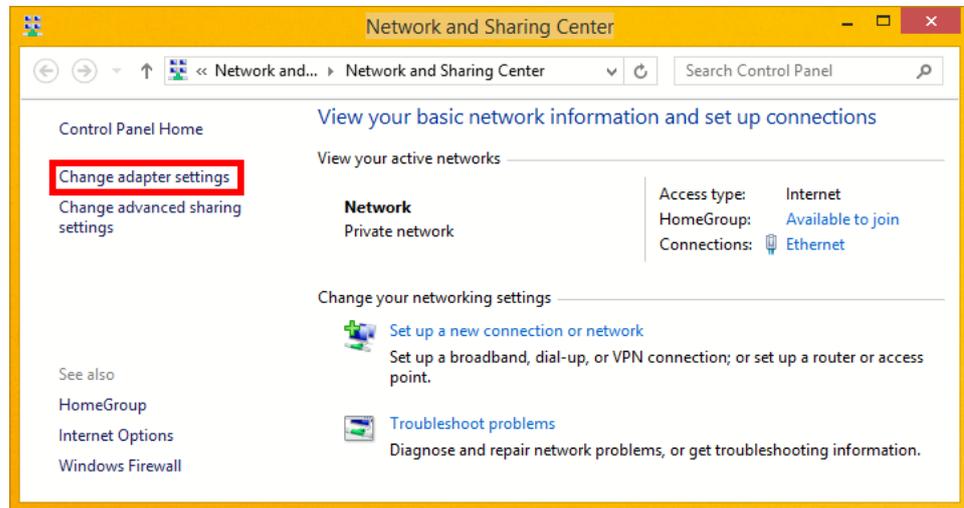


2. A **Network Connections** window will pop up, showing all the network connections available on your PC. Please double-click on the network connection you are using to connect to the switch.

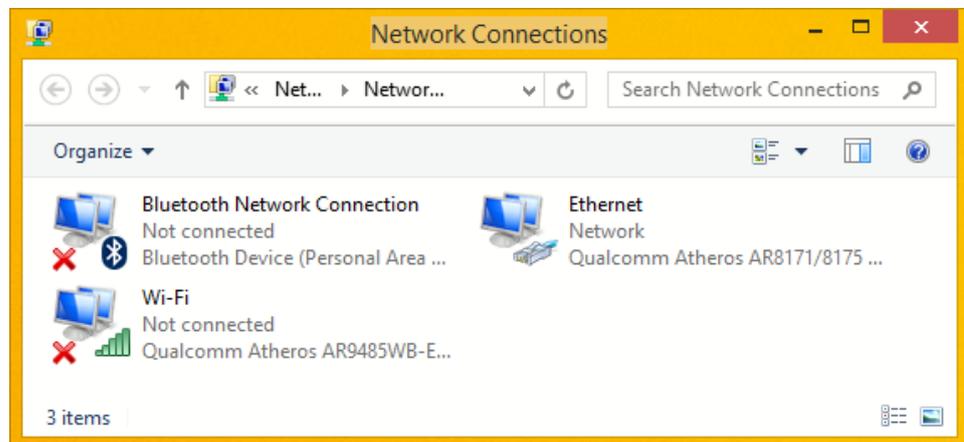


Appendix B: IP Configuration for Your PC

3. An **Ethernet Status** window will pop up. Please click on the **Properties** button as shown in the figure down below.

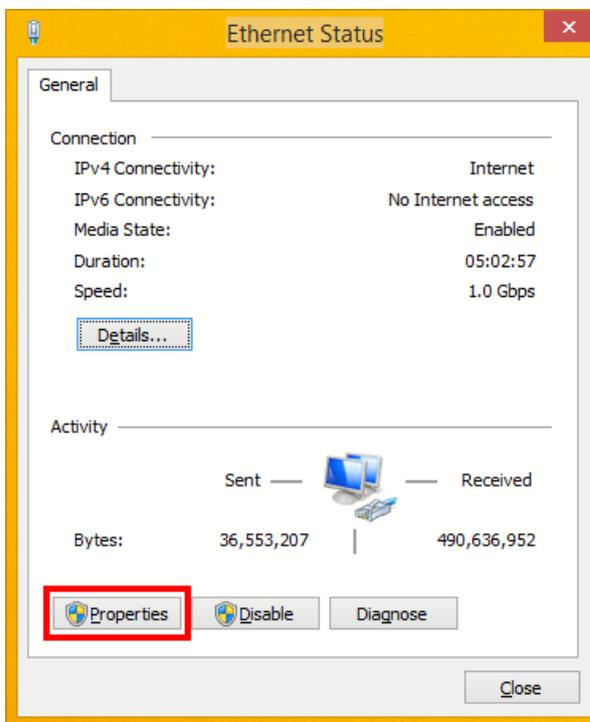

4. An **Ethernet Properties** window will pop up. Please double click on the **Internet Protocol Version 4 (TCP/IPv4)**.

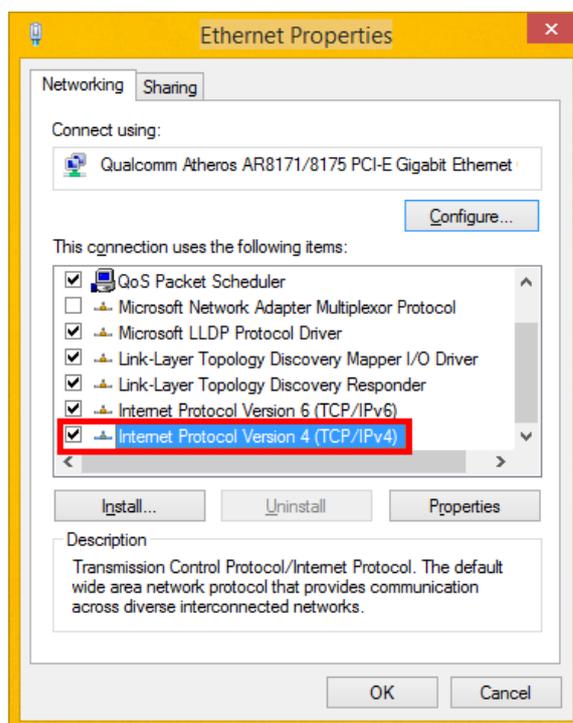

Appendix B: IP Configuration for Your PC

5. An **Internet Protocol Version 4 (TCP/IPv4) Properties** window will pop up. Please set your PC's IP address and subnet mask as shown in the figure down below.

By default, your product's IP address should be **192.168.2.1**. You can set any IP address as long as it's not the same with your product's IP address and is in the same network segment with your product's IP address.

Press **OK** to apply the TCP/IPv4 settings you just made. Now you can connect to your product using a web browser (i.e. Internet Explorer, Chrome, or Firefox).

