


**NMC1012
10/100/1000BaseT to 1000BaseSX
Media Converter Series**

-
-
-



DC Input & External Power Adapter

-
-
-
-

The TP Port

The SX Fiber Port


Quick Installation Guide

Key Features


-
-
-
-
-

Connections

Multi-Mode Fiber (MMF)

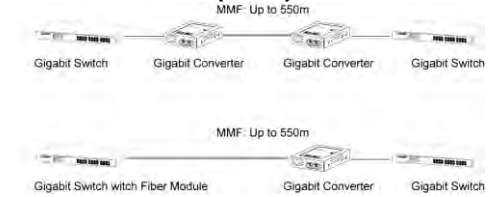

Single-Mode Fiber (SMF)




LEDs

LED Indicators of Media Converter

LED	Status	Operation


Technical Specifications

DIP Switch Setting

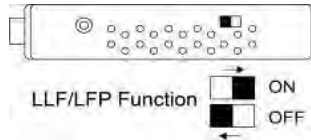


V. Link Fault Pass-through (LFP)Function

Normal status via a pair of LFPs



Status if one of all cables A · B · C and D isn't link.



Note: ● indicates LNK/ACT LED On
○ indicates LNK/ACT LED Off

Standards	
Features	
Data Transfer Rate	
Transmission Media	TP: 1000BaseSX:
LED Indicators	Per Port: Per Unit:
Power Requirement	
Power Consumption	
Dimensions	
Weight	
Operating Temperature	°C
Storage Temperature	°C
Humidity	
Certifications	

